

A new **DORIS / DIODE** version for Jason-2 **OGDR** real-time products




C. Jayles, C. Tourain, A. Auriol
(CNES, Toulouse, France)
J.P. Chauveau (AKKA, Toulouse,
France)



Results of the current on-board version are already much better than requirements


- No functional anomaly since Feb. 2010 (LV 8.0 upload)
- Accuracy similar to ground tests results before upload
- Radial RMS \approx 3.3 cm

In the meantime, our POD colleagues suggested implementation of an additional Hill Along-Track acceleration, in order to reduce (radiation pressure) mismodeling



DIODE development completed in July 2011, integration in DORIS LV11.0 is underway

DIODE / Jason-2 current on-board results (issue LV 8.0)

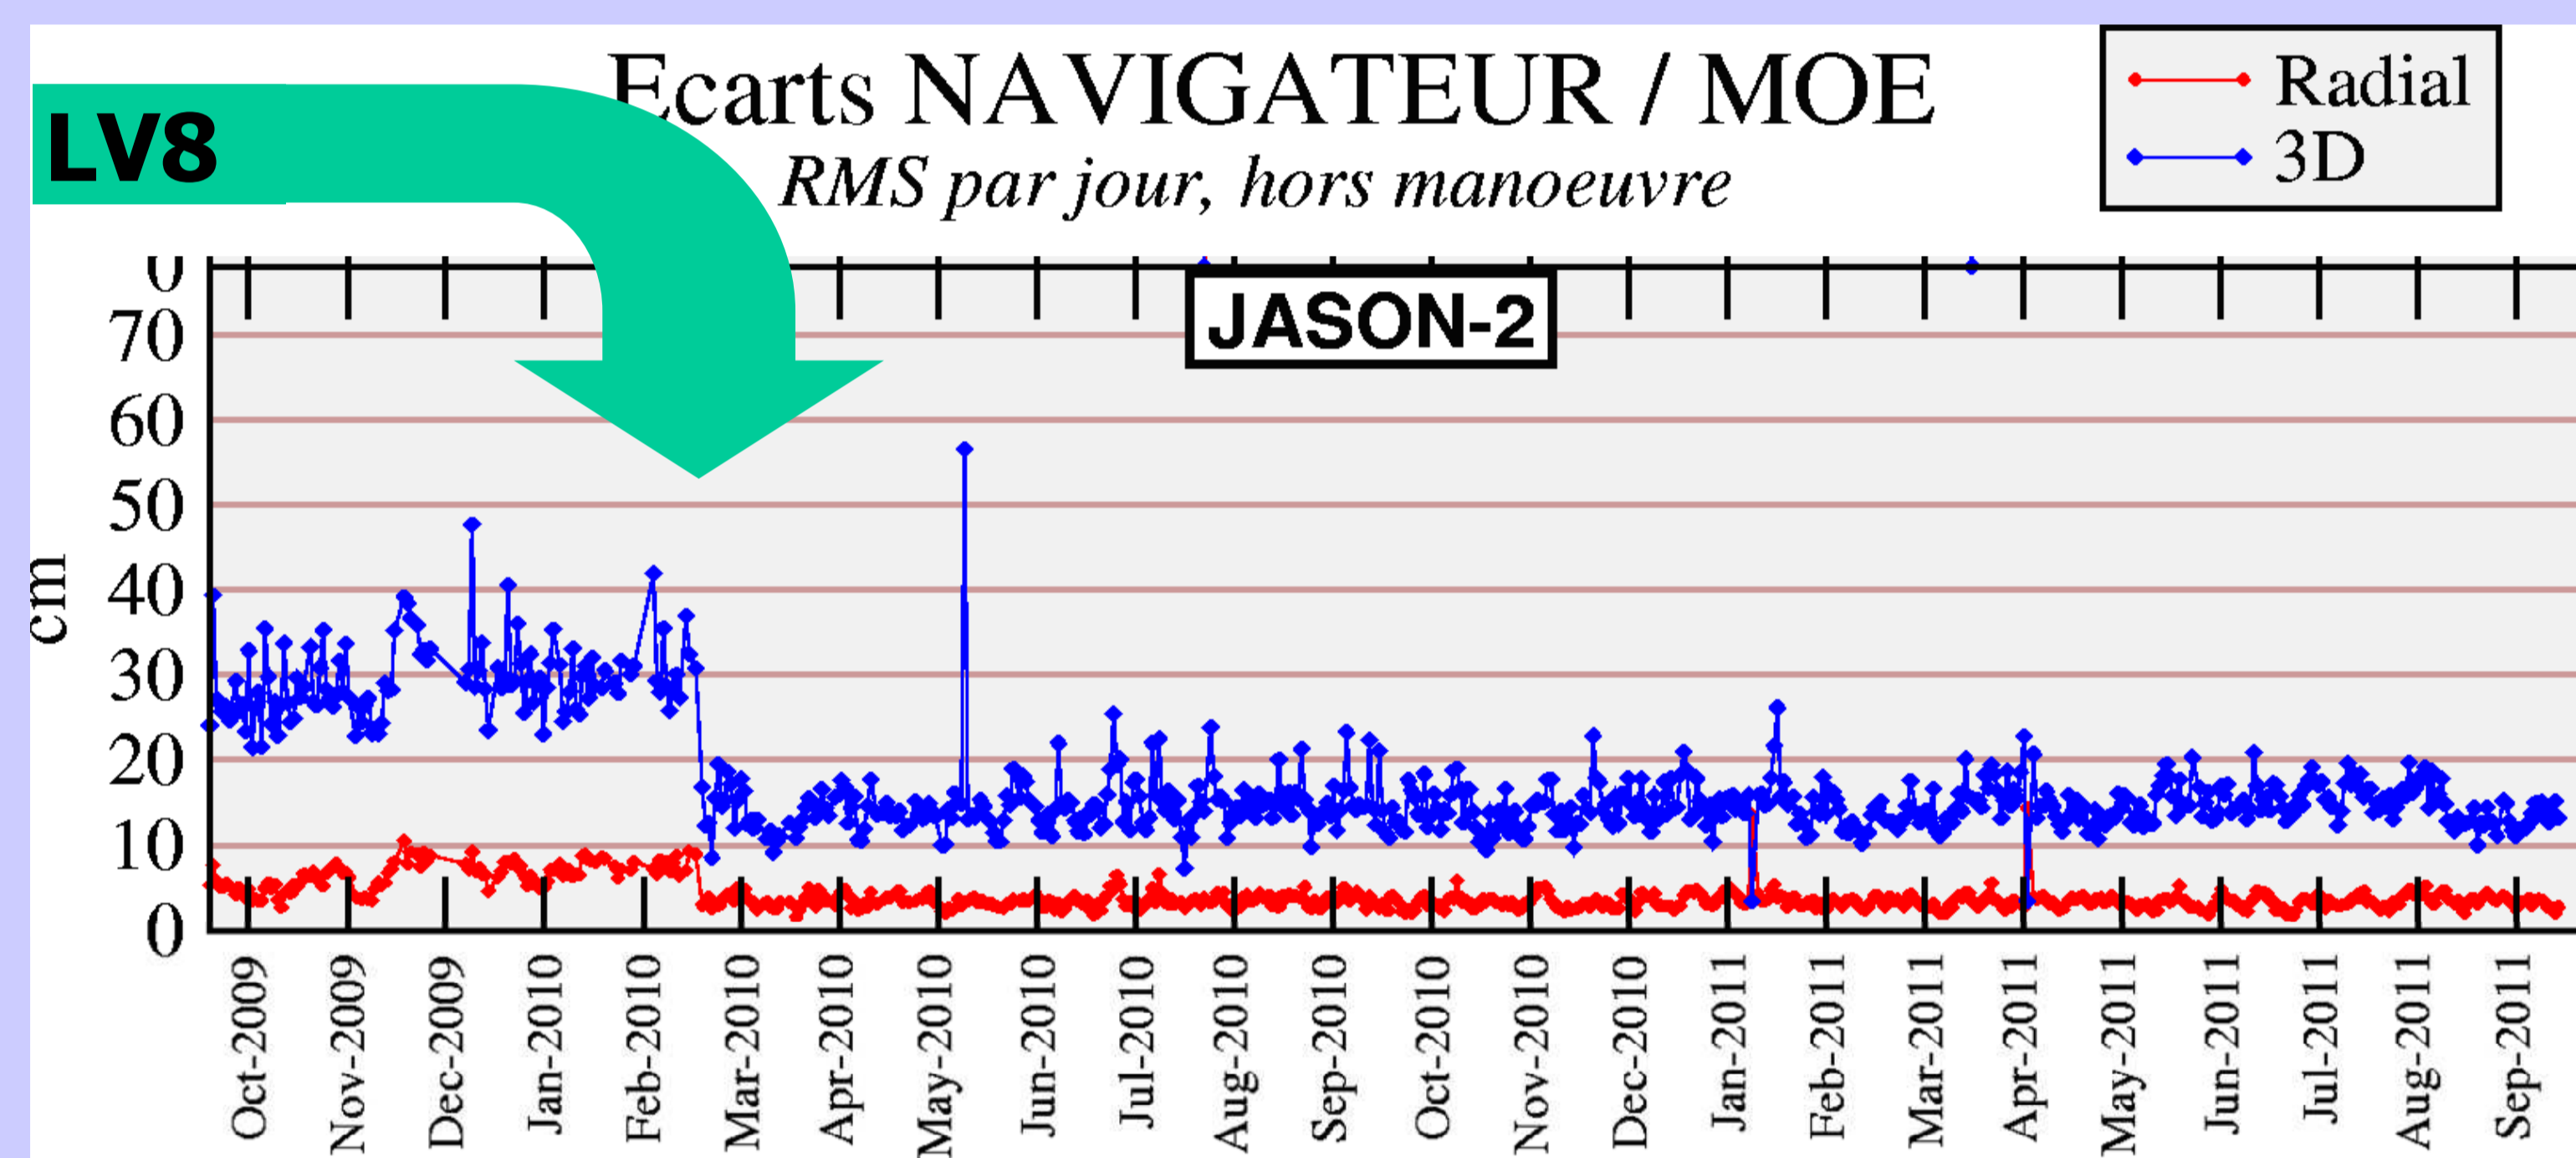


Main evolutions between LV8.0 and LV 11.0

- « auto-correction TAI » CryoSat-2/Yellowknife event fixed
- Add PAPEETE in the Master Beacons characteristics
- CRYOSAT2 mass and CoG correction (not used on J2)
- Sentinel3 et Jason3 idents added (not used on J2)
- Hill along-track acceleration added
- OAP formula changed
- Altitude variation / ellipsoid (not used on J2)
- ...
- This issue has been activated daily, with Jason-2 and CryoSat-2 measurements : algorithms are ground validated over very long periods (6 months)

LV11 is going to be uploaded on-board AltiKa and proposed for CryoSat-2


LV11 : Jason-2 ground results

18% improvement : 2.7 cm instead of 3.3 cm

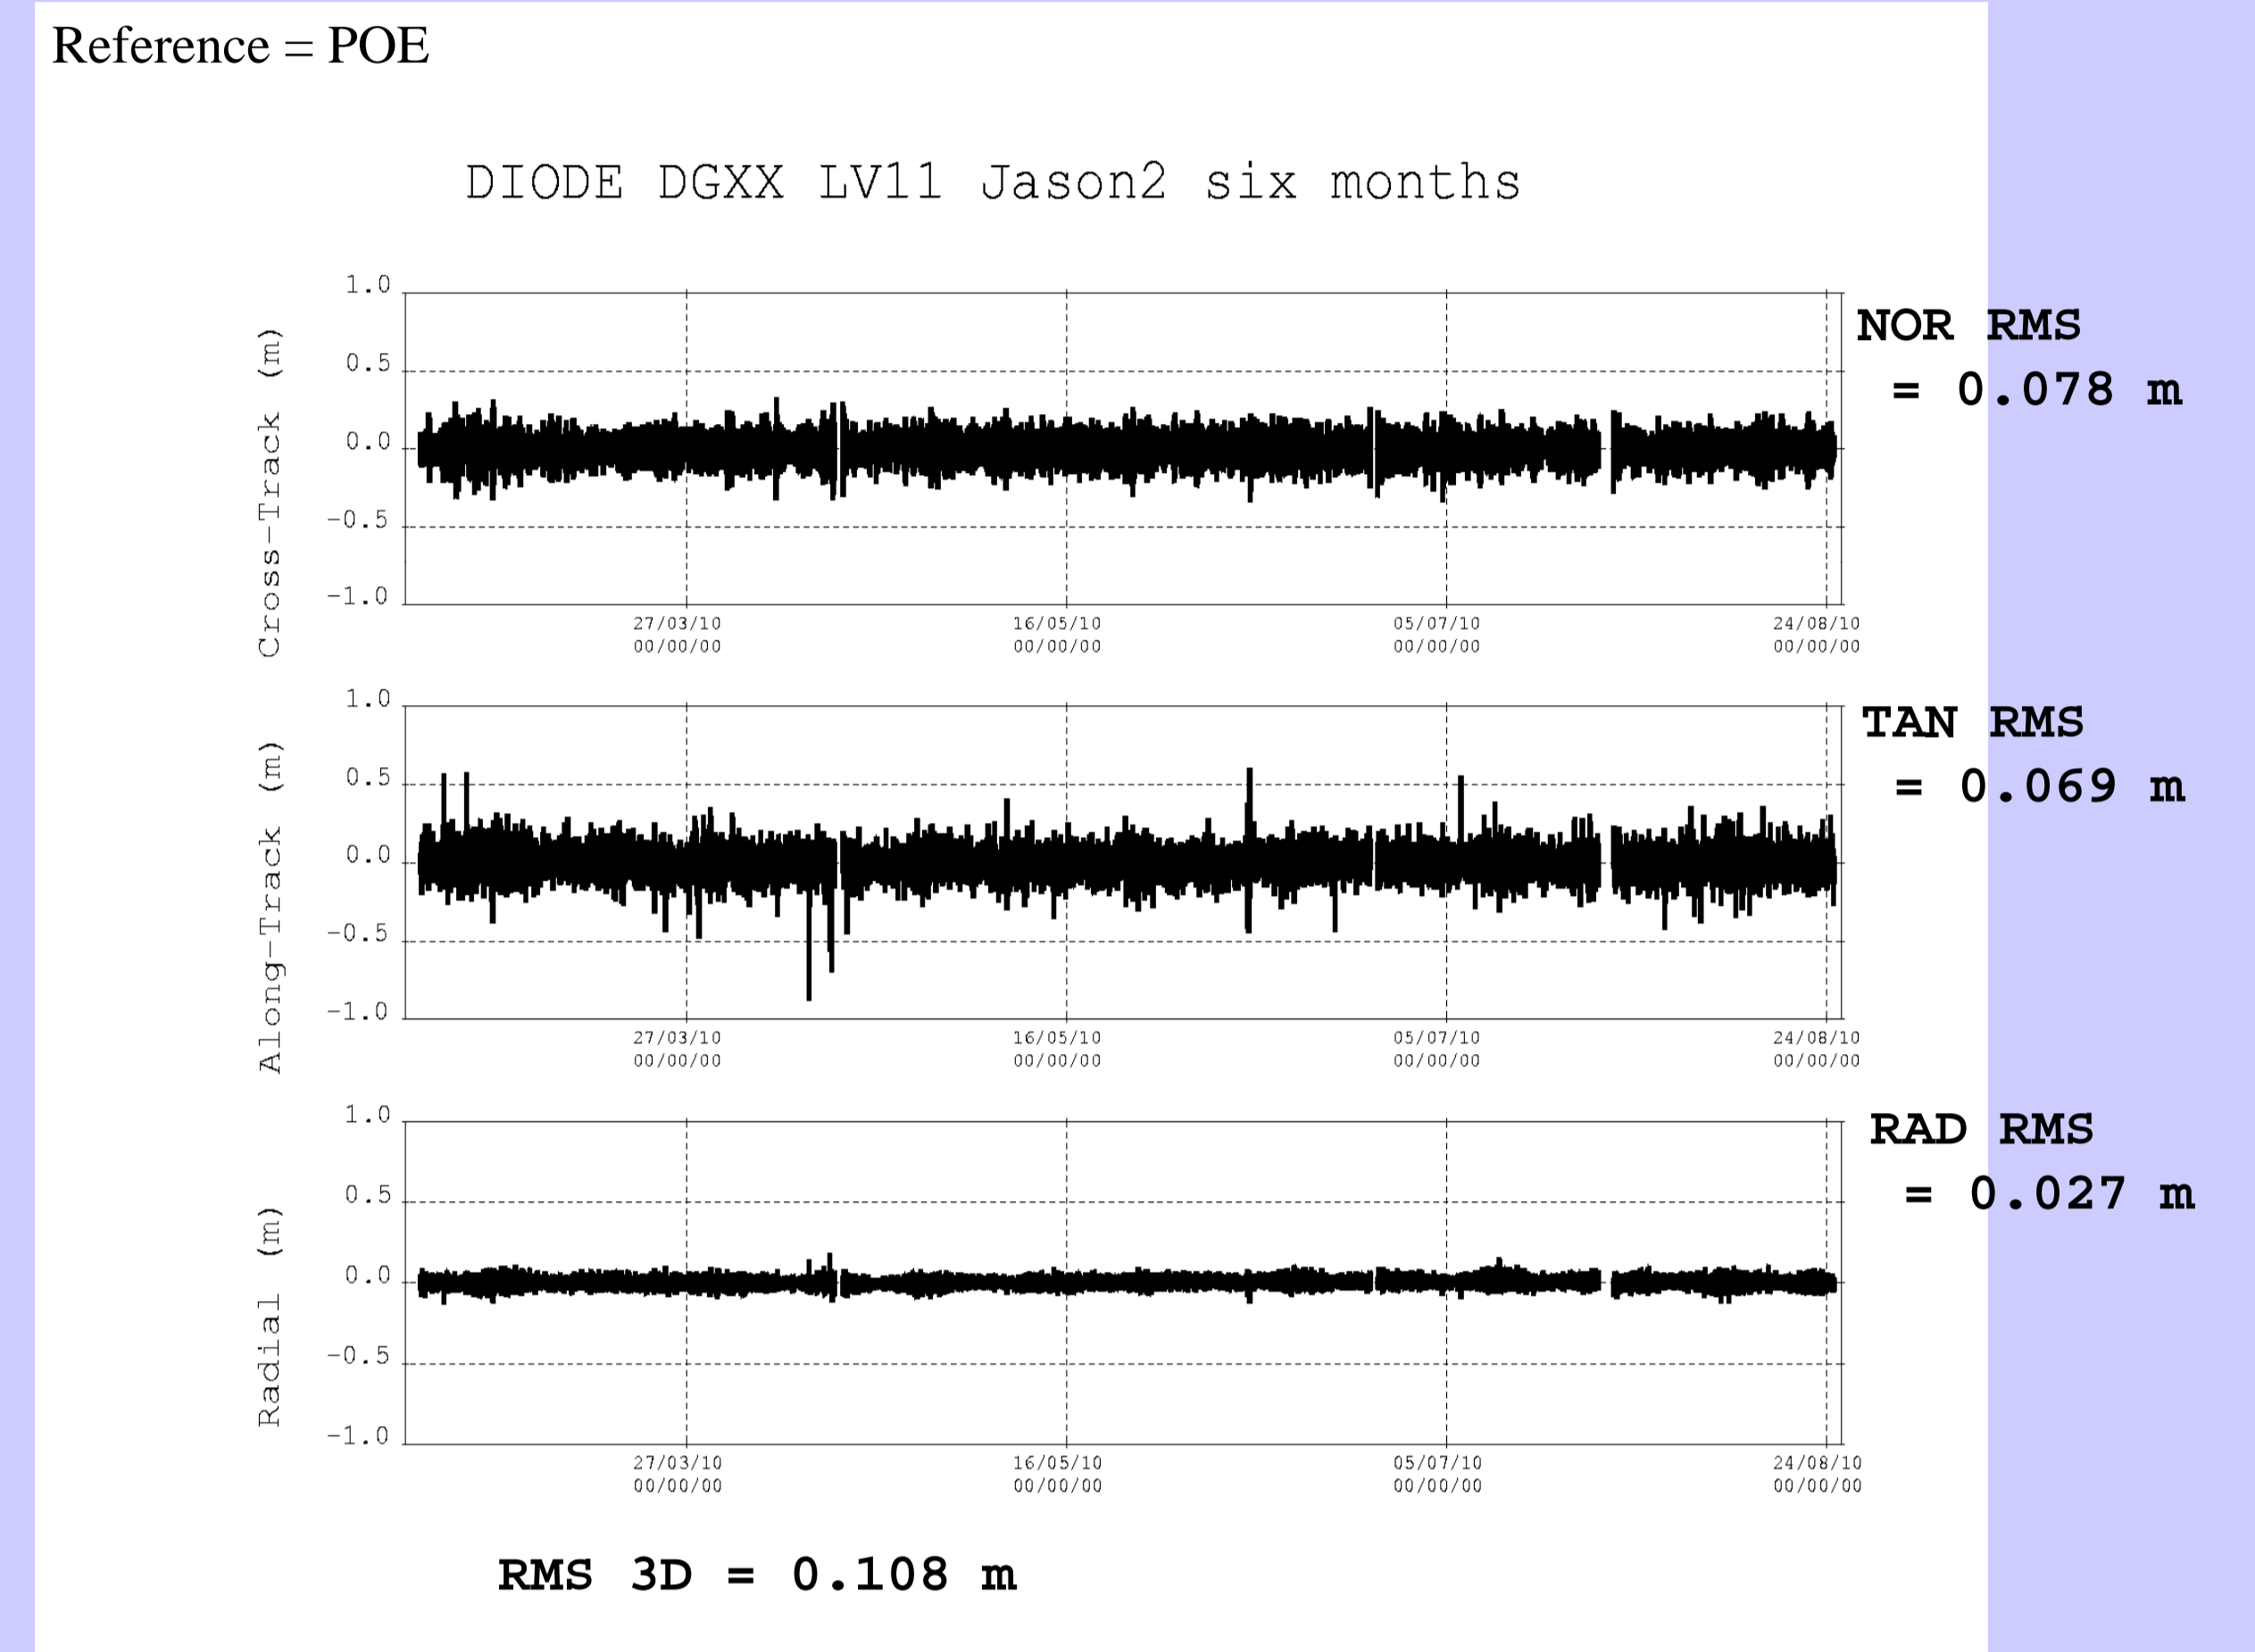

LV11 : CryoSat-2 ground results

Reference = POE, with (red) and without (black) Hill A-T force

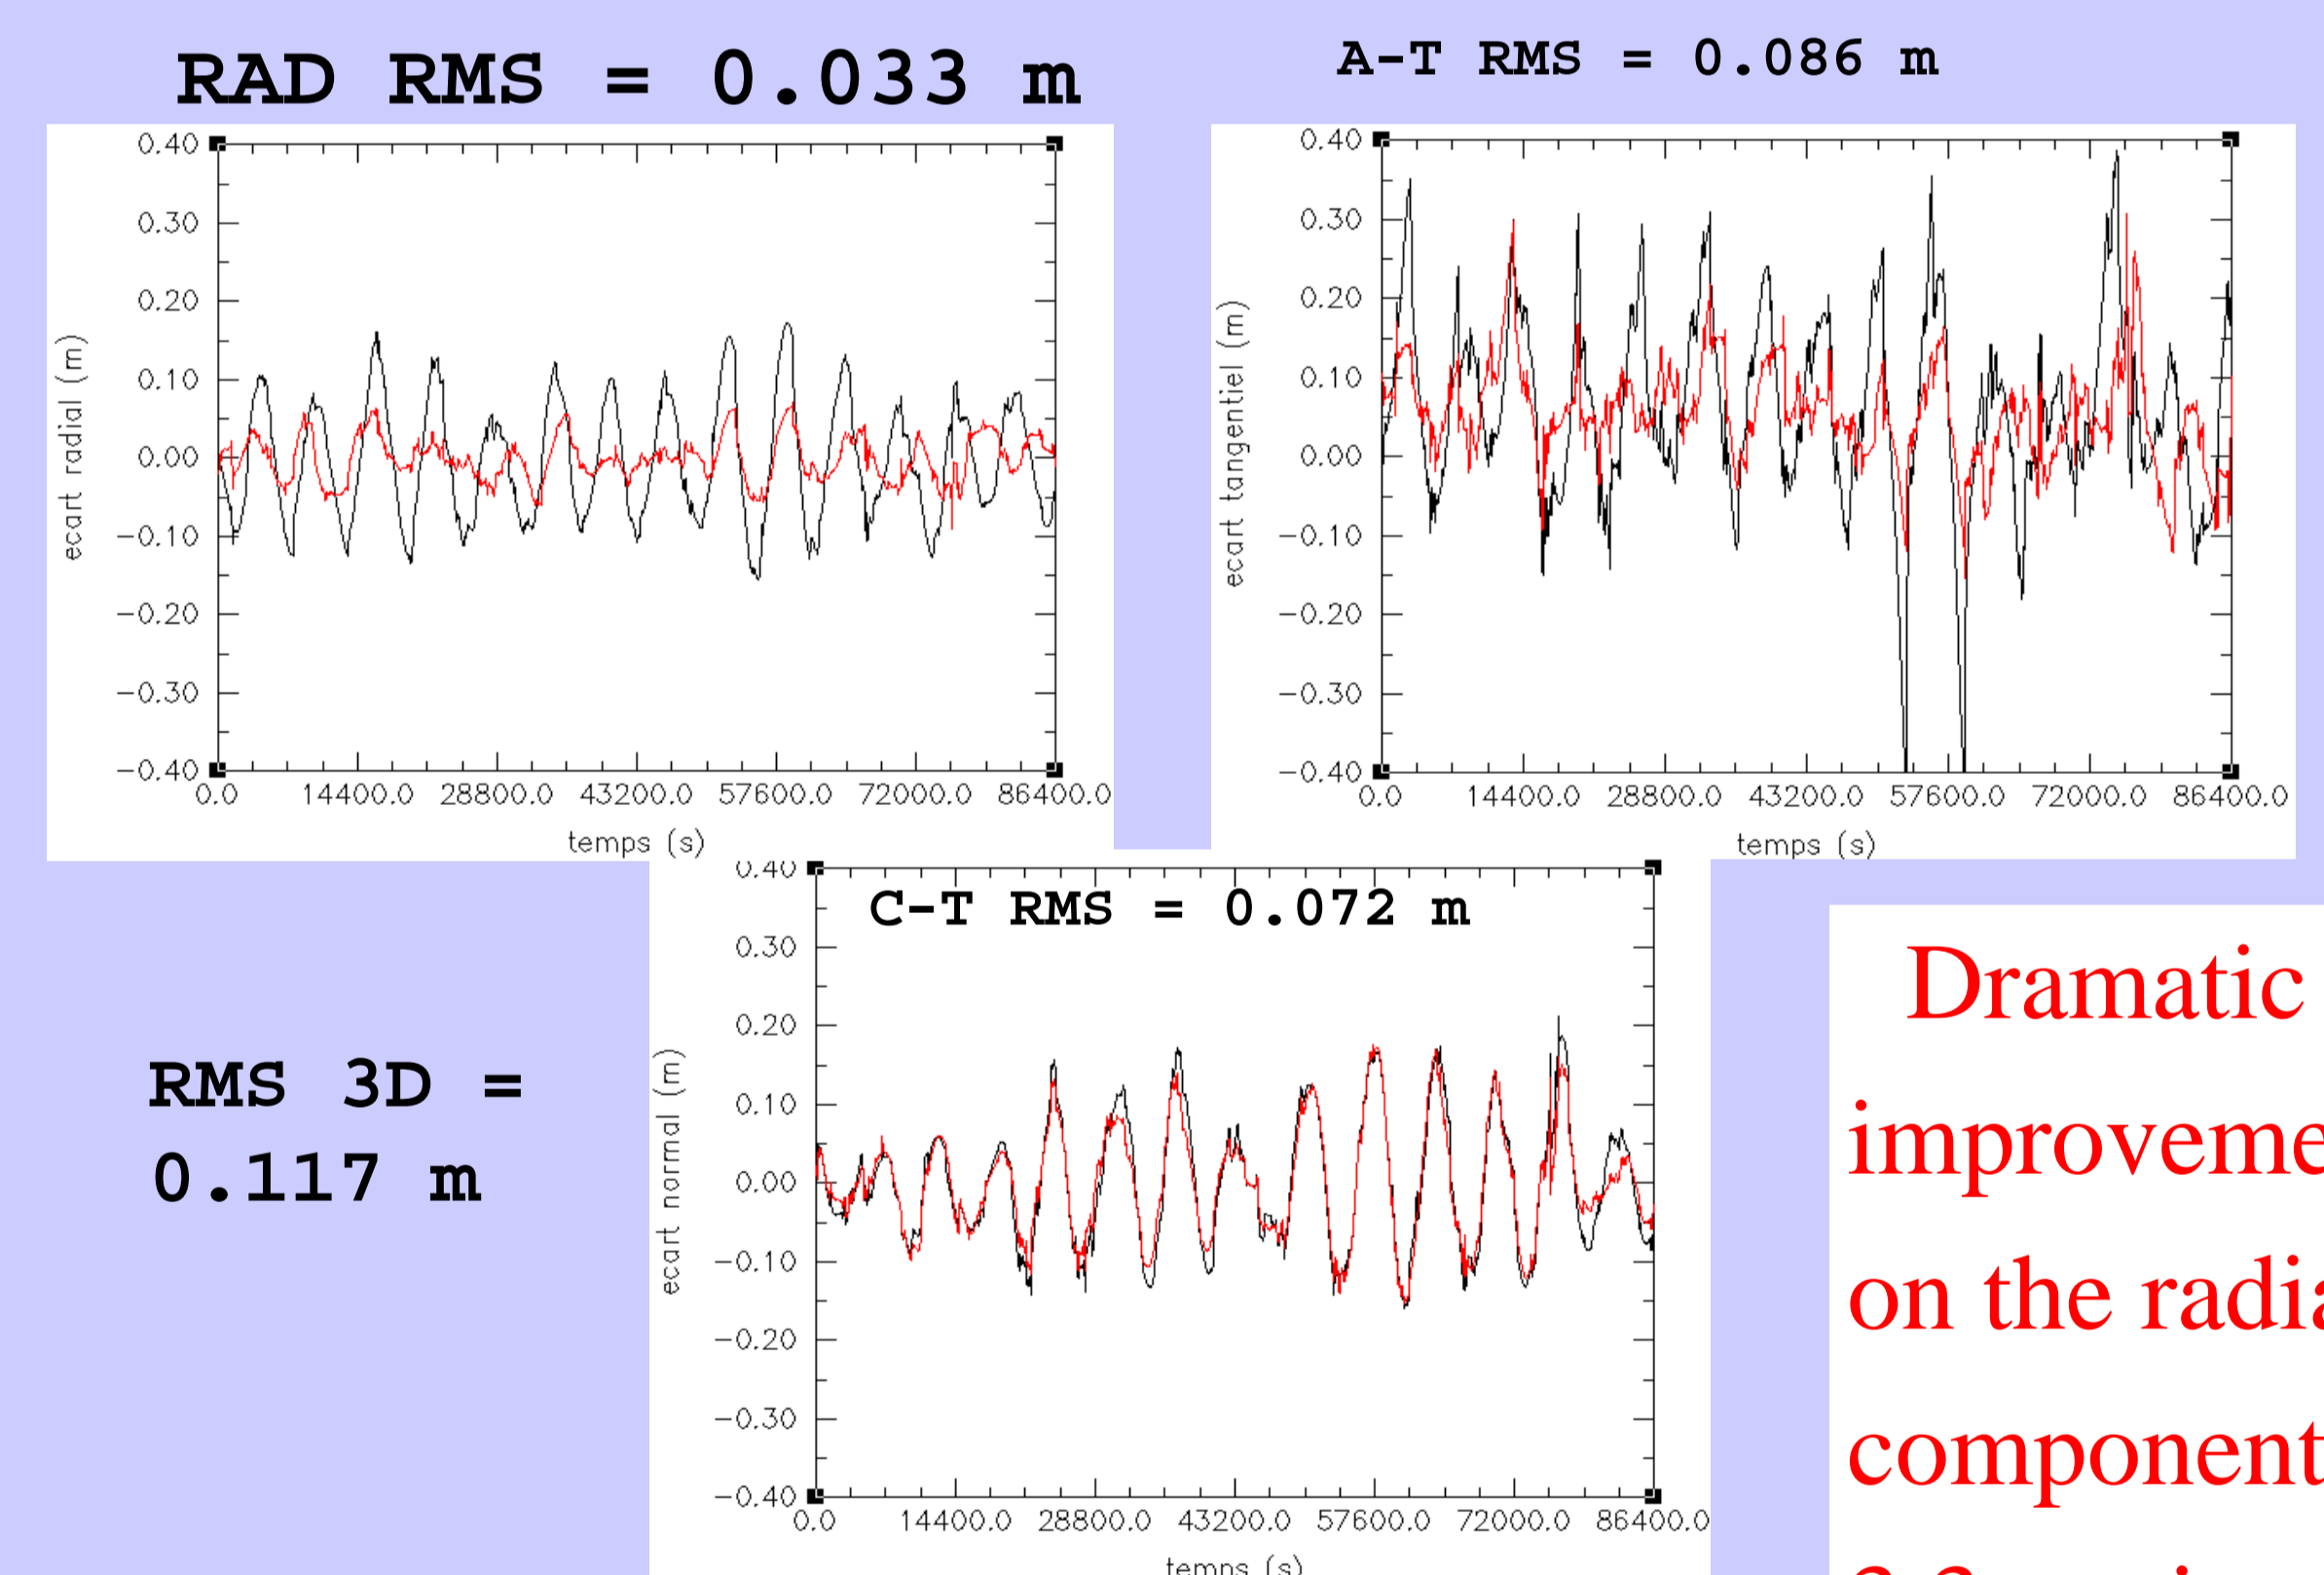

RMS 3D = 0.117 m

Dramatic improvement on the radial component : 3.3 cm instead of 7.6 cm

A new DORIS/DIODE version (LV11) is proposed for upload on-board Jason-2

Real-time orbit accuracy (OGDR) would drop from 3.3 cm RAD RMS down to 2.7 cm => 18% improvement

Robustness and time consumption verified

No change in ground segments (TRIODE is OK)

Validation will be complete in December 2011

