



# Envisat GDR Quality Assessment Report

**Cycle 095**

***26-10-2010 / 27-10-2010***

Prepared by :	Y. Faugere, CLS A. Ollivier, CLS	
Accepted by :	G. Dibarboure, CLS	
Approved by :	N. Picot, CNES	



## 1. Introduction. Document overview

The purpose of this document is to report the major features of the data quality from the ocean Envisat mission. The document is associated with data dissemination on a cycle by cycle basis.

The objectives of this document are :

- To provide a data quality assessment
- To provide users with necessary information for data processing
- To report any change likely to impact data quality at any level, from instrument status to software configuration
- To present the major useful results for the current cycle

It is divided into the following topics :

- General quality assessment and cycle overview**
- CALVAL main results**
- Long term performance monitoring**
- Particular investigations**

## 2. Cycle overview

### 2.1. Data and software version

---

This cycle has been produced with the IPF processing chain V6.04 and the CMA Reference Software V9.3\_05

The content of this science software version is described in a document available on the ESA PCS web site ([2]). The main impacts of these evolutions on the SSH are described in section [Impact of product version "c" \(IPF v6.02 / CMA v9.3\) for the SSH calculation.](#)

### 2.2. Parameters

---

The parameters used to compute the sea surface height (SSH) for Envisat are :

- Ku range (ocean retracking)
- POE orbit
- GIM ionospheric correction
- MWR derived wet troposphere correction
- ECMWF dry tropospheric correction
- Non parametric sea state bias
- MOG2D
- Total geocentric GOT00 ocean tide height
- Geocentric pole tide height
- Solid earth tide height

### 2.3. Warnings and recommendations

---

Warning concerning this Cycle : due to short cycle duration (only 1 day) only 39 tracks are certified valid from CALVAL point of view. User are so advise to use this cycle with care.

Users do not have anymore to correct it from any external correction.

-The S-band parameters, as well as the dual ionospheric correction are not relevant and must not be used from Cycle 65 pass 289. Users are advised to use the Ionospheric correction from GIM model, which is available in GDR data products (see section [Particular investigations](#)).

### 2.4. Platform and instrument events

---

- Cycle 95 is the first Envisat cycle on its drifting phase (pseudo orbit of 30 days).

It occurs after the interruption due to the scheduled change of orbit.

A 1st orbit lowering maneuver on the 2010/10/22 between 06 :50 and 09 :20,

a 2nd one occurred on 2010/10/26 between 14 :00 and 16h30.

### 2.5. Cycle quality and performances

---

Good general results are obtained for the 39 valid tracks of this cycle.

The crossover standard deviation is [No crossovers computed] cm rms when using a selection to remove shallow waters (1000 m), areas of high ocean variability and high latitudes (> |50| deg). The standard de-

variation of Sea Level Anomalies (SLA) relative to the CLS01V1 Mean Sea Surface is 0.0 cm. When using a selection to remove shallow waters (1000 m), areas of high ocean variability and high latitudes ( $> |50|$  deg) it lowers to 9.9 cm .

Detailed CALVAL results are presented in section .

## **2.6. Impact of product version "b" (CMA version 7.1) for the SSH calculation**

The evolutions having a direct and strong impact on the SSH estimation are described hereafter :

### **2.6.1. Usage of actual USO clock period**

Within the IPF version 5.02, the actual value of Ultra Stable Oscillator clock period is used within the L1b processing instead of the nominal one as it was used in previous IPF versions. This evolution implies a +2.5 cm jump on the Envisat SSH between cycle 40 and 41. To avoid this jump, and correct for the USO drift, users are advised to apply the correction provided by ESA on cycles 9 to 40 ([3]).

### **2.6.2. Improvement of the SSB correction**

The Sea-State bias table has been recomputed (Labroue, 2005 [4]) accounting for the impact of the new orbit and the new geophysical corrections (MOG2D, GOT00 ocean tide correction with the S2 component corrected once only, new wind speed algorithm from Abdalla, 2006). The new SSB correction is shifted in average by +2.0 cm in comparison with the previous one.

### **2.6.3. New POE orbit solution**

New standards are used for the computation of the Envisat Precise Orbit Estimation. One of the main evolutions is the use of the GRACE gravity model EIGEN\_CG03C. This new model implies a strong reduction of the geographically correlated radial orbit errors : the systematic differences between ascending and descending passes which were locally higher than 4 cm in South West Pacific and South Atlantic are almost fully removed.

### **2.6.4. MOG2D correction**

In order to take into account the dynamical effects and wind forcing, a new correction is computed from the MOG2D (Carrere and Lyard, 2003) barotropic model forced by pressure (without S1 and S2 constituents) and wind. The use of such a correction in the SSH strongly improves the performances.

## **2.7. Impact of CMA version 9.2\_01 for the SSH calculation**

---

### **2.7.1. New POE orbit solution**

From the cycle 68 onward, new standards are used for the computation of the Envisat Precise Orbit Estimation (POE GDR-C configuration).

### **2.7.2. MOG2D correction**

From the cycle 68 onward, data are produced with the new Dynamic Atmospheric Correction (DAC/MOG2D High Resolution).

## 2.8. Impact of product version "c" (IPF v6.02L04 and CMA v9.3) for the SSH calculation

---

The evolutions having a direct and strong impact on the SSH estimation are described hereafter :

### 2.8.1. Instrumental correction impacting the range

3 Major changes were performed in the new IPF chain :

- The introduction of USO correction directly in the range at the L1b level. This shall not have any impact on the data except that users shall not correct the products afterwards (see section **Particular investigations**) .
- The improvement of the PTR resolution from 3cm to 1.8mm.  
This has 2 impacts on the data :
  - A direct impact on the Calibration factors included in the Level2 Instrumental Corrections :
    - On the range through the Time Delay Calibration Factor.
    - On the  $\sigma_0$  through the  $\sigma_0$  calibration factor.
  - An undirect impact on the data through the retracking applied on a slightly modified waveform :
    - On all retracked parameters (Range through Epoch, SWH through SigmaC2, Wind through Sigma0, Mispointing, Peakiness)

### 2.8.2. Improvement of the SSB correction

2 changes were performed impacting the SSB correction :

- The Sea-State bias table has been recomputed according to Labroue, 2007 [5]. The method used provides a reduced time tag bias and orbit error on the whole mission period and makes profit of an adapted period for waveforms processing. Differences with previous SSB model are due to the orbit error which is taken into account and the radiometer wet tropospheric correction which explains the observed differences related to younger seas.
- Furthermore, the improvement of the PTR SigmaC estimation has an impact on the SWH value ( $SWH2 = \text{Sigma}P2 + \text{Sigma}C2$ ). It is estimated to -13cm with a slight dependence in SWH.

### 2.8.3. New MWR

Changes were performed on the MWR characterisation files with an impact on :

- Wet Tropospheric correction
- Brightness temperatures

### 2.8.4. New/Updates quality flags

- Updated Rain flag : In the algorithm the coefficients and look-up tables have been updated, in order to set the value of the flag.
- New Sea-Ice algorithm includes a 2-state sea ice flag (ice-free ocean and sea-ice) and 4 values indicating the membership of the pixel to each class (ice-free ocean, first-year ice, multi-year ice and wet ice). They are provided as percentages between 0 and 100 in the product.

## 2.8.5. Ocean Tide and Tidal Loading

Evolution from FES2002 to FES2004 : new Ocean Tide and Tidal Loading. This will have no impact on the data provided our SLA is computed with GOT tidal model.

## 2.8.6. Total bias expected/evaluated on the SLA monitoring

**The global impact noticed on the SLA monitoring (-10.6mm jump with geographical patterns) consists in the sum of :**

- Around -6.3mm due to the new PTR resolution increasing (included in the range instrumental correction) - Expected
- Around -4.3mm due to the new SSB solution (algorithm part : +2mm and 4% of 13cm SWH bias part : -5mm) - Expected

**Impact is also noticed on SWH monitoring :**

- Around -13cm bias on the SWH due to the PTR width estimation - Expected

**Other parameters are not or slightly impacted (weak impact on the range of the MWR new characterization files).**

- Sigma0 : +0.025dB and 0.0003dB from the sigma0 calibration factor
- At\_atmo : +0.016dB
- Wind : -0.06m/s
- TB2 : +0.9K (0.5K expected on all surfaces)
- TB3 : +2.3K (1K expected on all surfaces)
- USO : 1.8mm / 1mm / 0.4mm

**All these aspects are detailed and can be consulted in the dedicated note comparing data with both successive IPF/CMA versions on the same cycle (85) :**

[http://earth.eo.esa.int/pcs/envisat/ra2/articles/RA2\\_GDR\\_REPROCESS\\_CYCLE\\_085\\_RELEASE\\_NOTE.pdf](http://earth.eo.esa.int/pcs/envisat/ra2/articles/RA2_GDR_REPROCESS_CYCLE_085_RELEASE_NOTE.pdf)

## 2.9. Impact of product version (IPF v6.04 and CMA v9.3\_05) for the SSH calculation

Compared with the previous version of April (IPF V6.02L04 and CMA 9.3\_02 / Cycles 86 to 92), the only change concerns the USO algorithm. The anomalous behaviour previously noticed (jumps and default values) is now solved.

From cycle 93 onwards (and for the future reprocessed data), no more USO auxiliary file is needed.


### 3. CALVAL main results

This section presents results that illustrate data quality during this cycle. These verification products are produced operationally so that they allow systematic monitoring of the main relevant parameters.

After that it follows a drifting orbit with a pseudo period of 30 days and each cycle contains 862 tracks instead of the 1002 previous splitting.

#### 3.1. Missing measurements

71470 are present, and 2216250 (96.9%) are missing. The maps below illustrate missing 1Hz measurements in the GDRs, with respect to a 1 Hz sampling of a nominal repeat track.

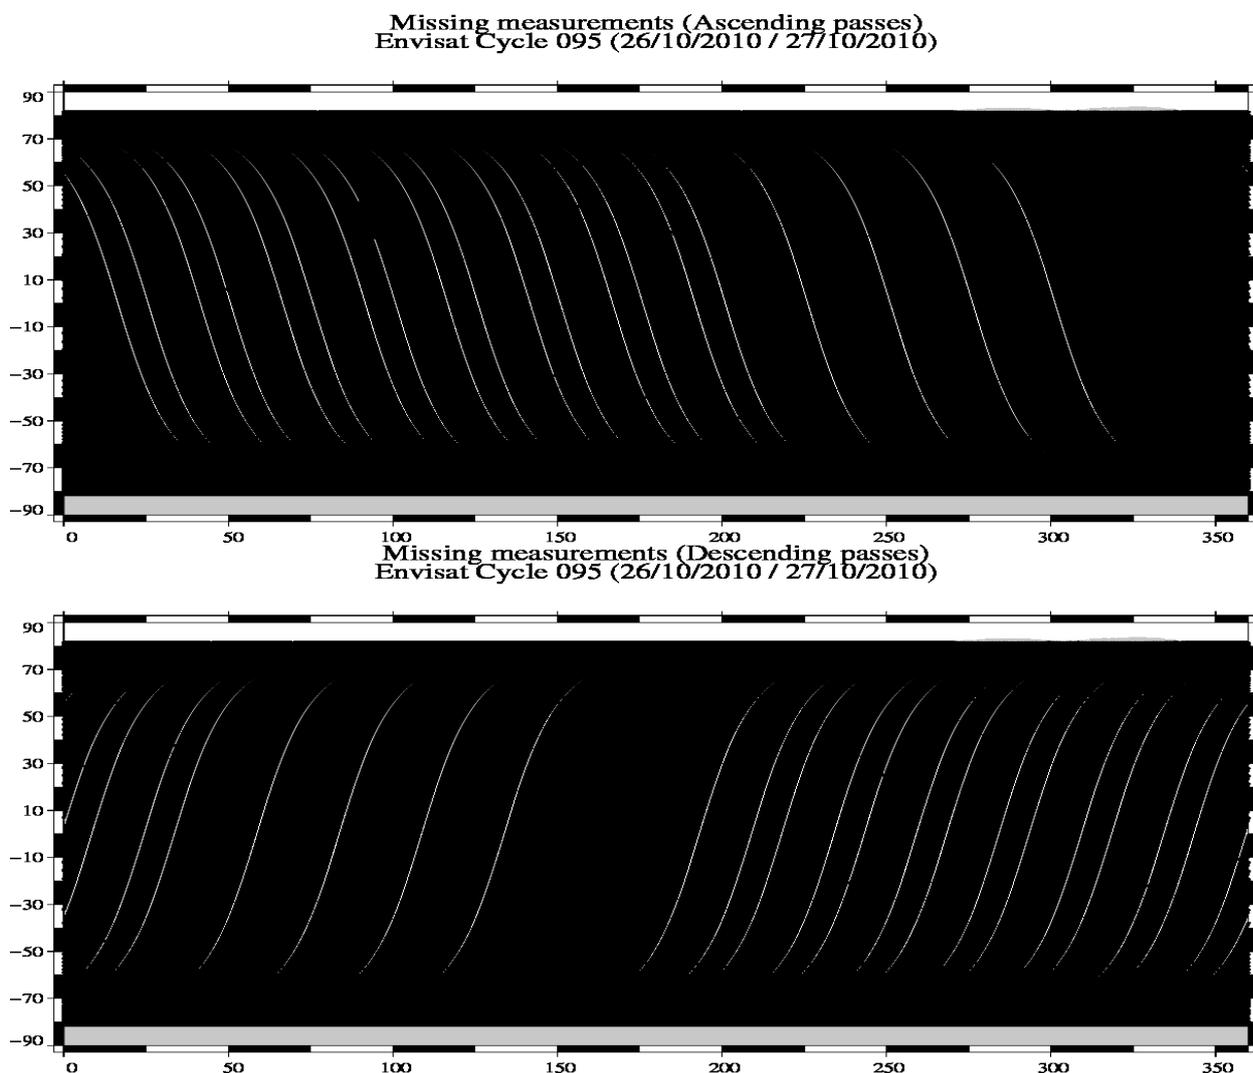

43 passes produced over one day of data (817 to 834) and (838 to 862).

Passes 1 to 816 (up to 26-10-2010 07 :56) are missing due to planned interruption during change of orbit.

Passes 835 to 837 (26-10-2010 21 :21 to 27-10-2010 00 :39) are missing : not explained yet, ticket open on ESA Side.

### 3.2. Orbit quality

---

Passes 825 to 827 (on 26-10-2010 from 13h55 to 15h57) partially or completely edited due to SLA out of threshold : maneuver of the 26-10-2010.

### 3.3. Edited measurements

#### 3.3.1. Statistics

Data editing is necessary to remove altimeter measurements having lower accuracy.

First, there is an editing using flags. Compared to the GDR product, two additional flags are computed :

**An ice flag** to detect sea ice measurements. A measurement is set to ice if, at high latitudes ( $> |50|$  deg), one of the following criteria is valid :

- Number of 20Hz measurement  $< 17$
- $|MWR - ECMWF|$  wet tropospheric correction  $> 10$ cm
- Peakiness  $> 2$

Parameter	Nb rejected	% rejected
Radiometer land flag	5019	8.31
Ice flag	12835	21.25
	0	0.00

Then, measurements are edited using thresholds on several parameters. These thresholds are expected to remain constant throughout the Envisat mission, so that monitoring the number of edited measurements allows a survey of data quality.




The next table gives for each tested parameter, minimum and maximum thresholds, the number and the percentage of points removed.

Parameters	Min Thres.	Max Thres.	Nb rejected	% rejected
Sea surface height (m)	-130.000	100.000	3403	6.36
Variability relative to MSS (m)	-2.000	2.000	4495	8.41
Number of 18Hz valid points	10.000	-	18	0.03
Std. deviation of 18Hz range (m)	0.000	0.250	885	1.66
Off nadir angle from waveform (deg2)	-0.200	0.160	1542	2.88
Dry tropospheric correction (m)	-2.500	-1.900	0	0.00
MOG2D correction (m)	-2.000	2.000	0	0.00
MWR wet tropospheric correction (m)	-0.500	-0.001	202	0.38
GIM Ionospheric correction (m)	-0.400	0.040	0	0.00
Significant wave height (m)	0.000	11.000	46	0.09
Sea state Bias (m)	-0.500	0.010	9	0.02
Backscatter coefficient (dB)	7.000	30.000	708	1.32
GOT00 ocean tide height (m)	-5.000	5.000	1	0.00
Long period tide height (m)	-0.500	0.500	0	0.00
Earth tide (m)	-1.000	1.000	0	0.00
Pole tide (m)	-15.000	15.000	0	0.00
RA2 wind speed (m/s)	0.000	30.000	9	0.02

A final editing is then performed on corrected sea surface height, using a spline fitting procedure, leading to remove 26 ( 0.05 %) measurements.

### 3.3.2. Figures

The following maps are complementary : they show respectively the removed and selected measurements in the editing procedure.

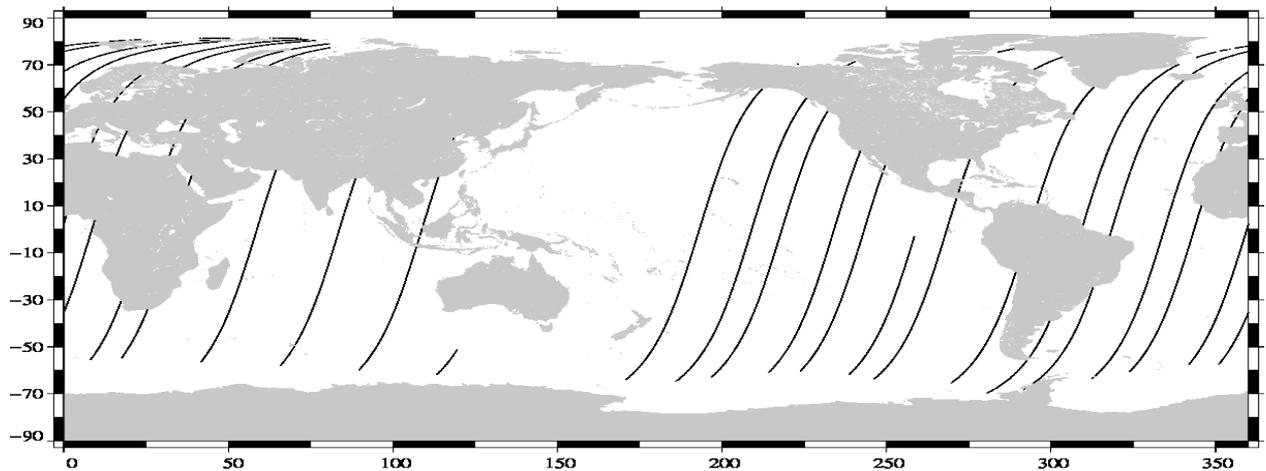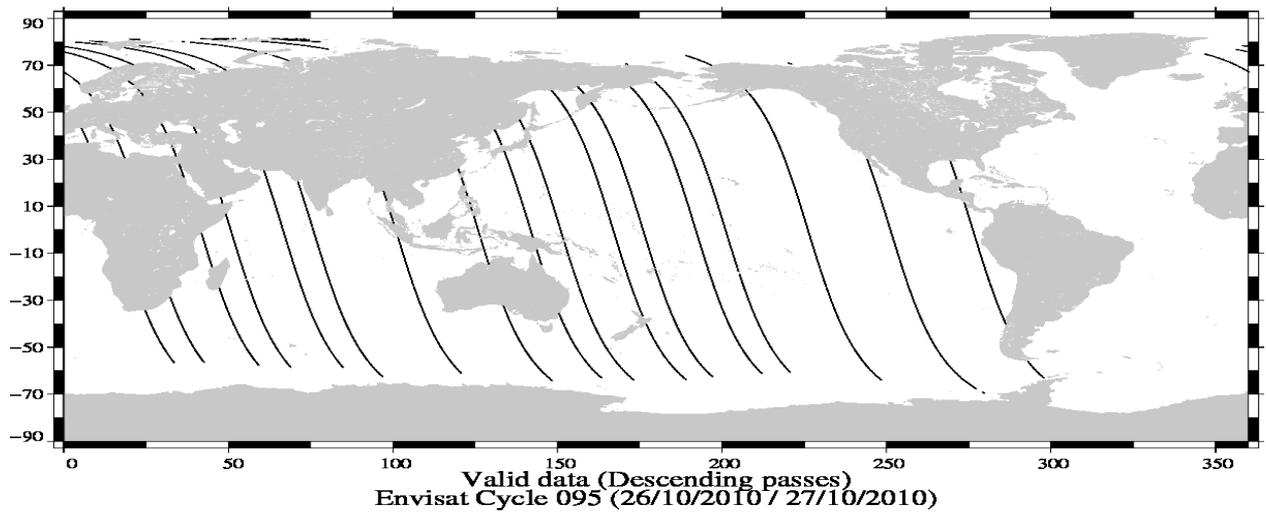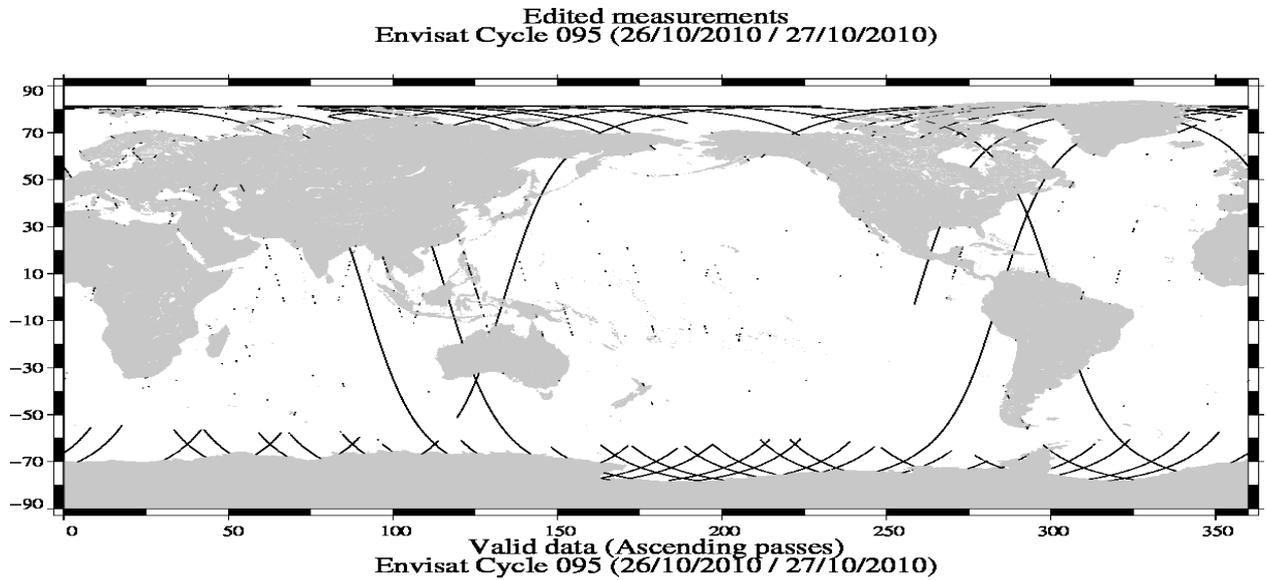


### 3.3.3. Comments

2 passes (834 and 839) are entirely edited on the radiometer land flag (no MWR correction).  
Passes 825 to 827 (on 26-10-2010 from 13h55 to 15h57) partially or completely edited due to SLA out of threshold : maneuver of the 26-10-2010.  
Note that before this incomplete cycle (level 0 and level 1) were received without MWR data from 2010/10/19 2h57 to 2010/10/26 08h01 (before beginning of this cycle).

Wet areas appear in the plot of removed data. Similar features are observed with other altimeters (T/P, Jason) mainly due to rain contamination.


### 3.4. Altimeter parameters

In order to assess and to monitor altimeter parameter measurements, histograms of Envisat Ku-band Significant Wave Height (SWH), Backscatter coefficient (Sigma0) and RMS of altimeter range are computed.

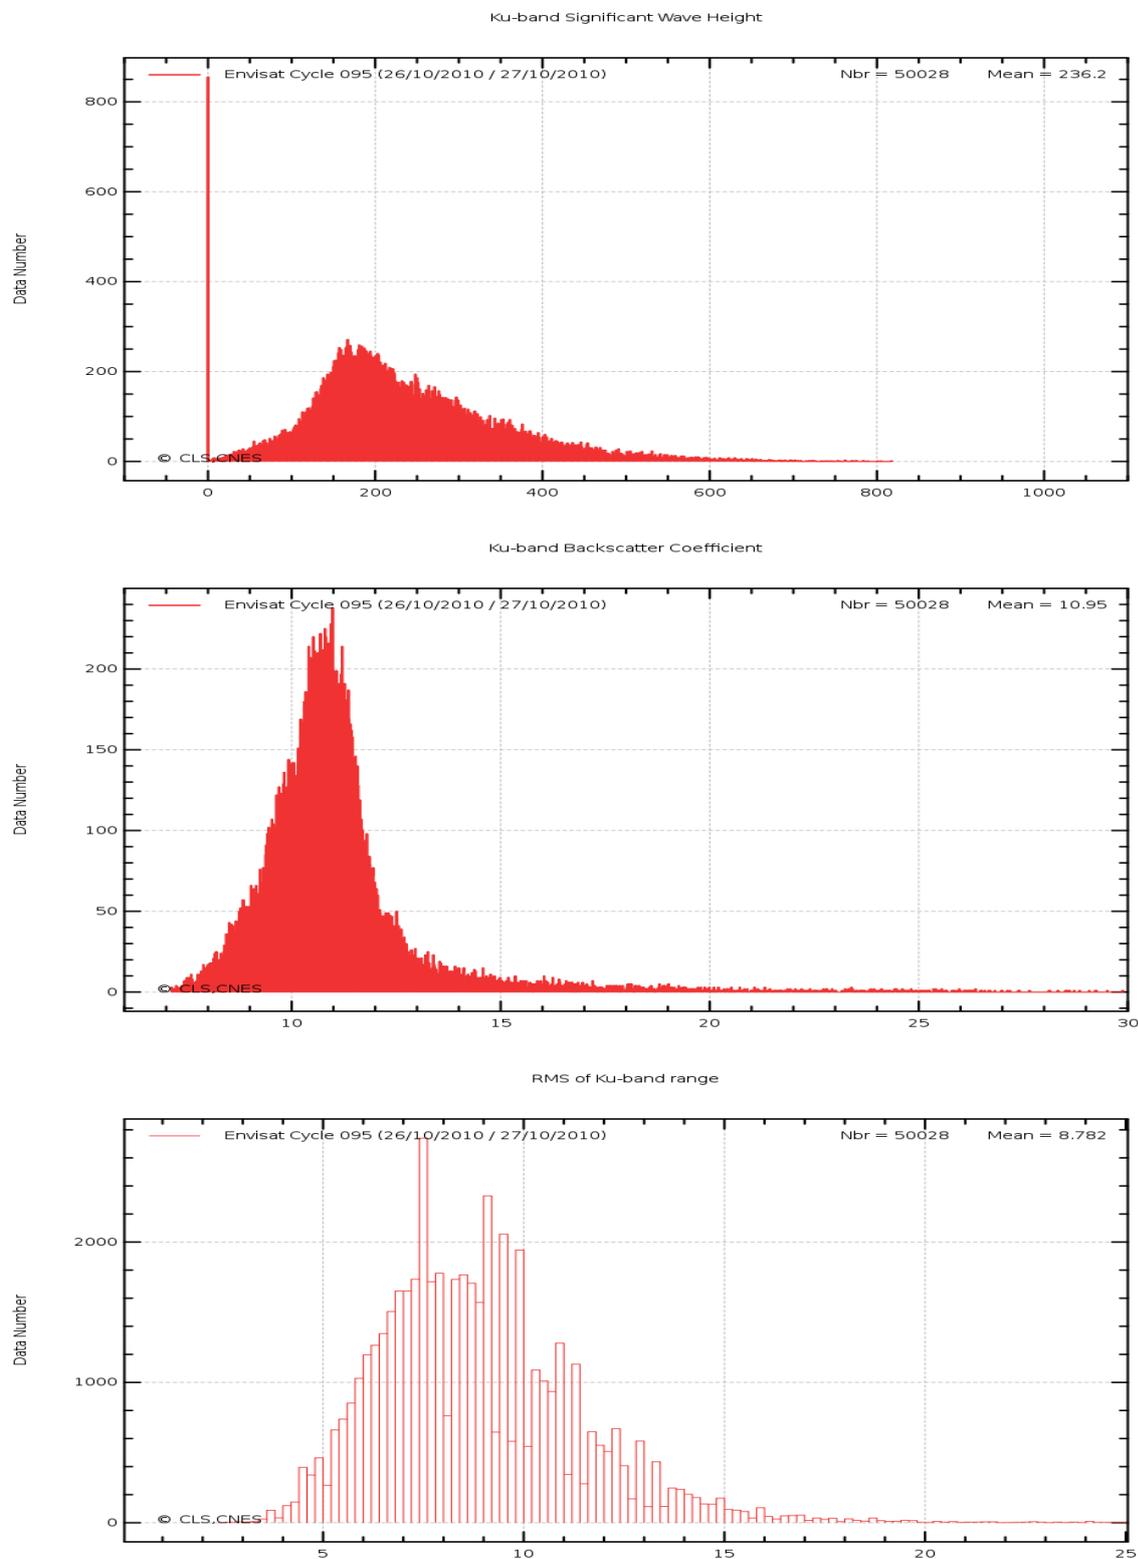

### 3.5. Radiometer


In order to assess and to monitor radiometer measurements, a scatter plot between the radiometer wet troposphere correction and the ECMWF model is computed for the valid data set previously defined.

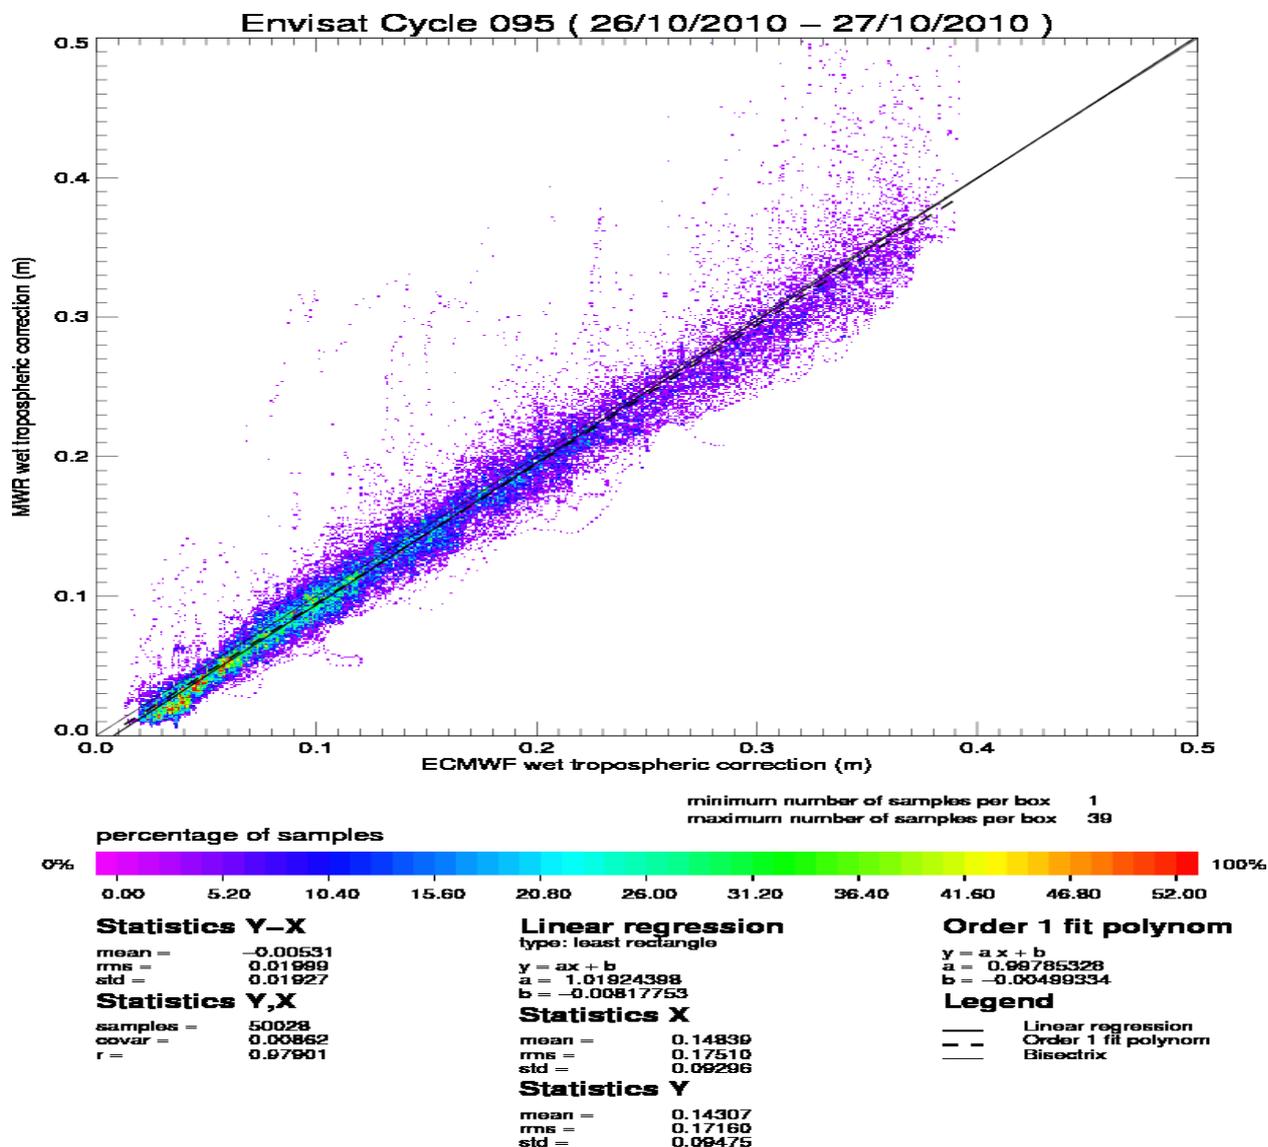

The radiometer-model mean difference is 0.5 cm. A drift on the Envisat 23.8GHz brightness temperature has been detected and has to be monitored on the long term. Note that the neural algorithm is now implemented on Envisat.

### 3.6. Wind and wave maps

These two figures show wind and wave estimations derived from 35 days of altimeter measurements.

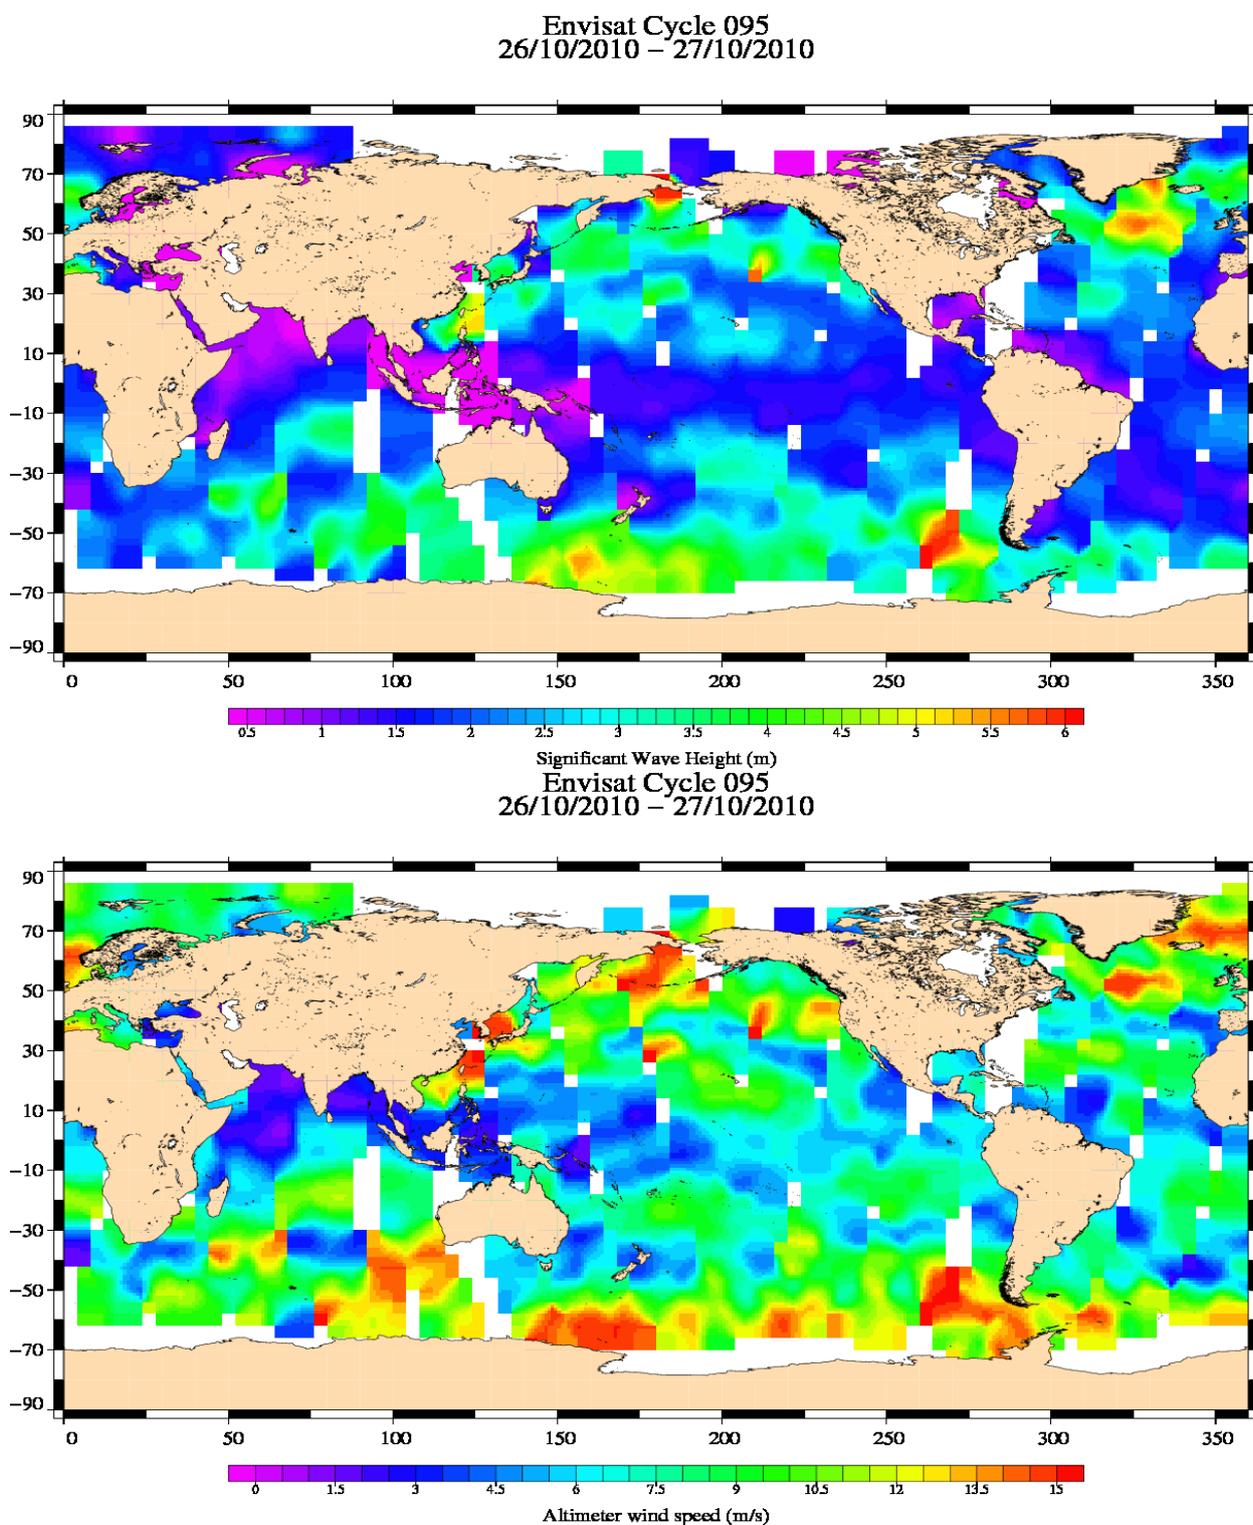

### 3.7. Crossover statistics

---

Not communicated for this uncomplete cycle.

## 3.8. SSH variability

---

### 3.8.1. Sea Level Anomaly

Repeat-track analysis is routinely used to compute Sea Level Anomalies (SLA) relative to the previous cycle and relative to a mean profile. The mean profile has been computed using ERS-1 and ERS-2 data and has been adjusted on the 7 year TP mean profile. In order to see fine features SLA are centered about the mean value.

For the drifting phase (after cycle 95) no mean profile exists the only possible reference is the MSS, available everywhere see hereafter.


### 3.8.2. Comparison to a precise Mean Sea Surface

The MSS from the product is used as a reference to compute SLA. Global statistics of Envisat SSH-MSS are (cm) : Not computed for this too uncomplete cycle.


When using a selection to remove shallow waters (1000 m), areas of high ocean variability and high latitudes ( $> |50|$  deg) statistics are :

Number	Mean	Std. dev.
34846.00000000	48.21	9.89

The two following maps respectively show the map of Envisat SLA relative to the MSS and differences higher than a 30 cm threshold. In order to see fine features SLA are centered about the mean value. The latter figure shows that apart from isolated measurements, higher differences are located in high ocean variability areas, as expected.

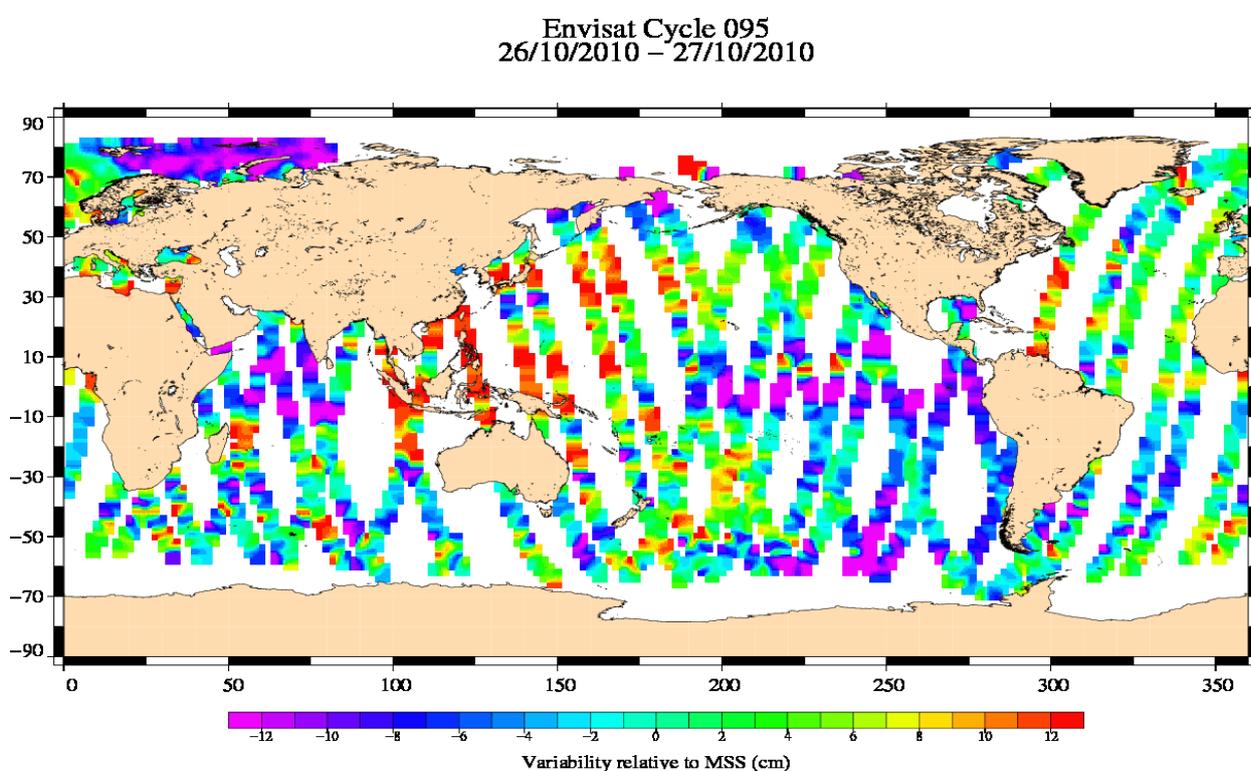

(SSH - MSS) centered, differences greater than 30 cm  
Envisat / Cycle 095

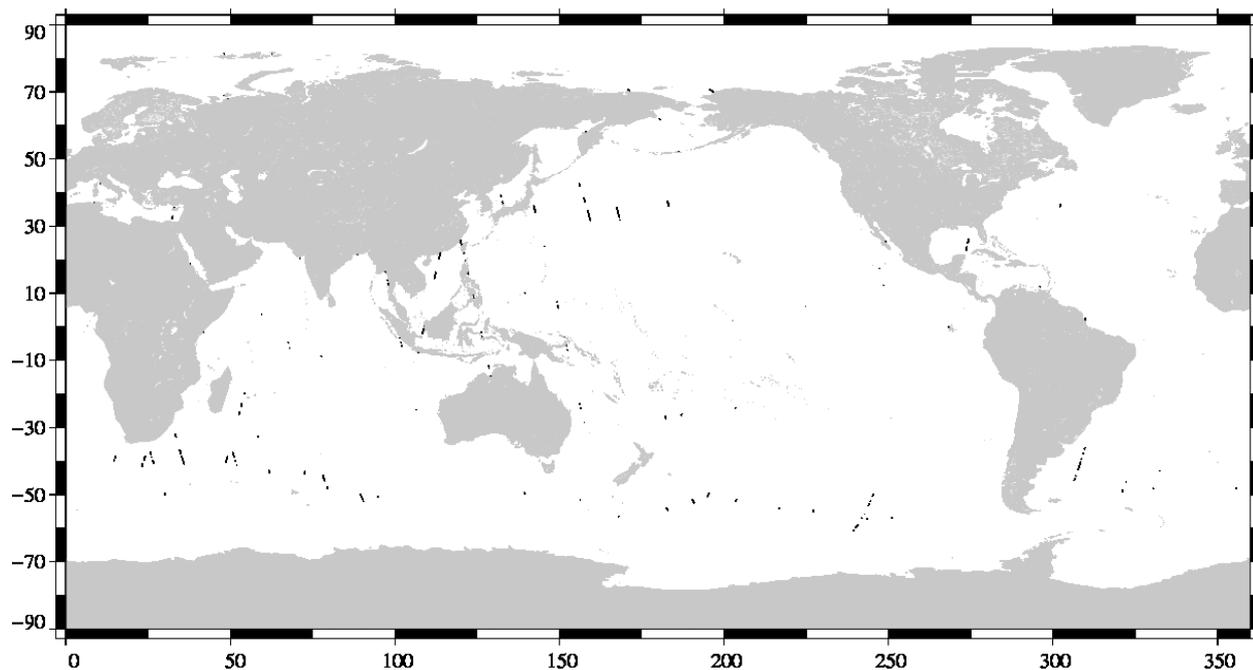

## 4. Envisat long term performance monitoring

Statistics of SSH variability are computed after crossover and repeat-track analyses. This allows to estimate how Envisat data fulfill the mission objectives in terms of performances.

### 4.1. Standard deviation of the differences at crossovers

This parameter is plotted as a function of time in a one cycle per cycle basis in the figure below. It is computed after data editing and using 2 editing selection criteria :

- Selecting crossover differences lower than 30 cm to avoid contamination by remaining spurious data.
- Removing shallow waters (1000 m), areas of high ocean variability and high latitudes ( $> |50|$  deg.) to avoid ice coverage effects.

Note, since cycle 86 and future cycles processed, a selection at 10 days is applied to generate the crossover differences. This selection explain the jump on the monitoring of standard deviation of the differences at crossovers.

Due to a too small amount of data, no crossovers were computed.

## **4.2. RMS of Sea Level Anomaly**

---

Sea Level Anomalies relative to a mean profile are computed using repeat-track analysis for each Envisat cycle. To monitor Envisat performances and ocean signals, the cycle per cycle standard deviation of the SLA is plotted as a function of time.

For the drifting phase (after cycle 95) no mean profile exist. This diagnostic does not exist anymore.

### 4.3. Mean Sea Level


The SSH is computed using :

- the ECMWF model and the radiometer MWR wet troposphere correction corrected from side lobes in order to compare both results.
- the correction provided by ESA to correct the range from the USO drift and bias ([3]) for cycle 9 to 40
- the dual ionospheric correction for cycle 9 to 64 and the GIM ionospheric correction from cycle 65 onwards, with an 8 mm offset applied to take into account the change from the dual ionospheric correction to the GIM ionospheric correction
- the Labroue (2007 [5]) sea state bias for all cycles

Unlike other statistics, it is not performed on a cyclic basis but on a 250 tracks basis (around 9 days), in order to have approximately a temporal sampling close to Jason-1 mission (around 10 days). The curve is then filtered with a 6 months and 6 months cut of frequency for a better readability.

The value for each point is calculated from an average over 2 by 3 degree bins, then weighted by latitude to take into account the relative geographical area represented by the bin.

During the first year (cycles 10 to 22) Envisat MSL global trend is not consistent to other flying satellites. This unexplained behavior is under investigation. Results plotted on the following figure is obtained after annual and semi-annual signals reduction after cycle 22.

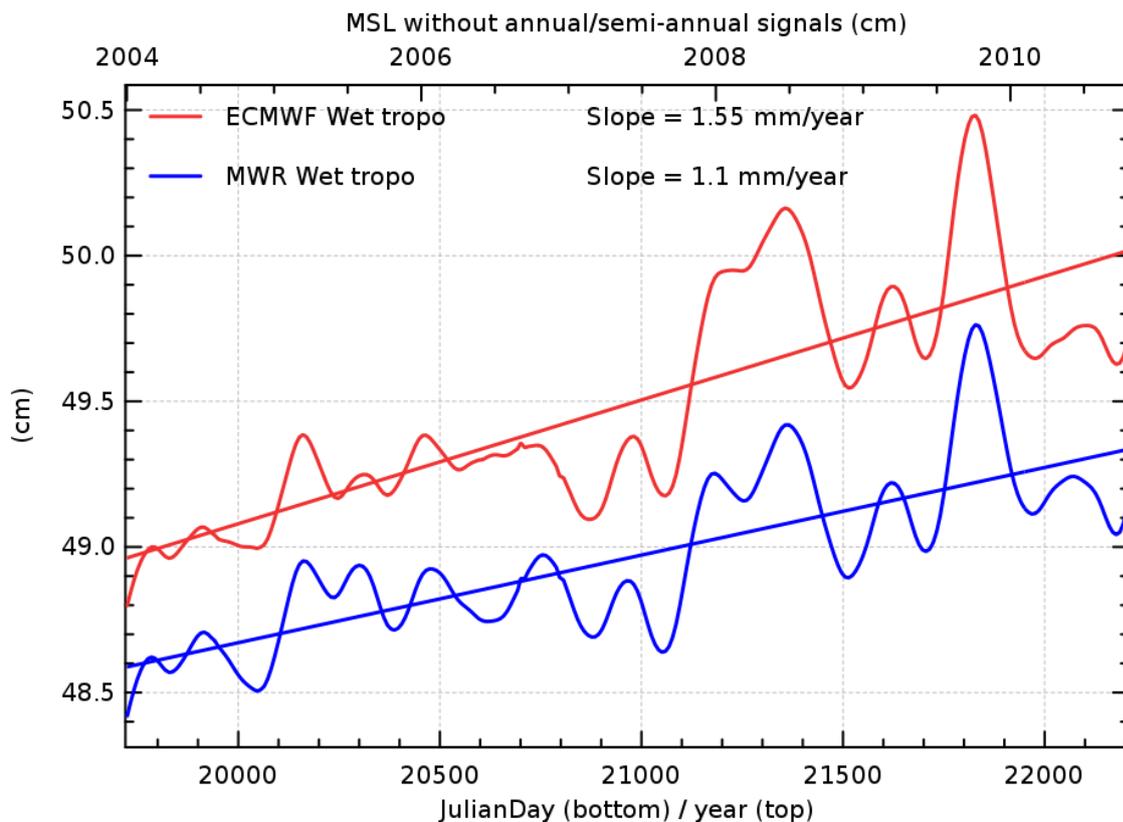

## 5. Particular investigations

- Ten hours after the recovery of the HSM anomaly on the 17 January 2008, a drop of the RA2 S-band transmission power occurred. Consequently, all the S-band parameters, as well as the dual ionospheric correction and rain flag are not relevant and **MUST NOT** be used from the following date : 17 January 2008, 23 :23 :40 (Cycle 65 pass 289). Users are advised to use the Ionospheric correction from GIM model, which is available in GDR data products.
- With the new IPF/CMA version, even in USO anomaly period, the range is corrected from the proper USO Period.

### **User warning on the use of auxiliary USO files :**

From cycle 93 onwards (and for the future reprocessed data), no more USO auxiliary file is needed.

### **Warning concerning this Cycle :**

Due to short cycle duration (only 1 day), only 39 tracks are certified valid from CALVAL point of view. User are so advise to use this cycle with care.

- [1] Abdalla, S., "A wind retrieval algorithm for satellite radar altimeters", ECMWF Technical Memorandum, in preparation, 2006.
- [2] EOO/EOX, October 2005, Information to the Users regarding the Envisat RA2/MWR IPF version 5.02 and CMA 7.1 Available at <http://earth.esa.int/pcs/envisat/ra2/articles/>
- [3] Martini A., 2003 : Envisat RA-2 Range instrumental correction : USO clock period variation and associated auxiliary file, Technical Note ENVI-GSEG-EOPG-TN-03-0009 Available at [http://earth.esa.int/pcs/envisat/ra2/articles/USO\\_clock\\_corr\\_aux\\_file.pdf](http://earth.esa.int/pcs/envisat/ra2/articles/USO_clock_corr_aux_file.pdf)  
<http://earth.esa.int/pcs/envisat/ra2/auxdata/>
- [4] Labroue S., 2005 : RA2 ocean and MWR measurement long term monitoring 2005 report for WP3, Task 2 SSB estimation for RA2 altimeter, Technical Note CLS-DOS-NT-05-200
- [5] Labroue, S., 2007 : RA2 ocean and MWR measurement long term monitoring, 2007 report for WP3, Task 2 - SSB estimation for RA2 altimeter. Contract 17293/03/I-OL. CLS-DOS-NT-07-198, 53pp. CLS Ramonville St. Agne