





CalVal Saral/ Altika



SARAL/Altika validation and cross calibration activities

Executive Summary

2021



This is a synthesis of the annual report concerning validation activities of SARAL/AltiKa GDRs in 2021 under SALP contract supported by CNES at the CLS Space Oceanography Division.

The report covers different topics, which are investigated either as part of routine Cal/Val activities, or following mission events:

- mono-mission validation and monitoring,
- cross-calibration between SARAL/AltiKa and Jason-3,

The results presented in the document are mainly based on the current version of GDR data (GDR-F). The content of the GDR-F standard for SARAL/AltiKa data can be found in SARAL's Product Handbook https://www.avisio.altimetry.fr/fileadmin/documents/data/tools/SARAL_Altika_products_handbook.pdf. A detailed evaluation of the impact of the full dataset's reprocessing has been synthesized in a dedicated report (will be available shortly).

Feel free to check out all of SARAL/AltiKa's annual reports available on the Aviso website under the following link : <https://www.avisio.altimetry.fr/en/data/calval/systematic-calval/annual-reports/saral.html>.

Please note that there was no incident on the platform nor the instrument in 2021.

The main parameters of SARAL/AltiKa are routinely monitored since the beginning of the mission and have been updated until cycle 155.

Hereafter a brief summary of the main results of the validation activities run in 2021 on SARAL/AltiKa.

Data coverage and parameters monitoring

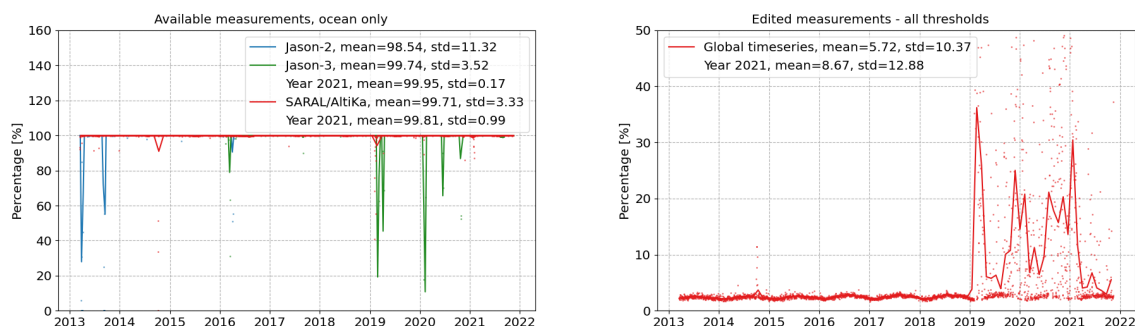


Figure 1: *Monitoring of GDR data since the beginning of mission (cycles 1 to 155). Percentage of available (left) and edited (right) measurements (on thresholds criteria).*

Considering all surface types, SARAL/AltiKa has an average of **97.66%** of available data over its lifetime (March 2013 - November 2021). When considering only the ocean surface, the mean value of available measurements for SARAL/AltiKa is around **99.71%**. SARAL/AltiKa had some periods with reduced data availability.

In any case, these figures largely exceed the specifications for SARAL/AltiKa, which were **95%** of all possible over-ocean data during a 3-year period with no systematic gaps plus the specific Ka-band limitation (5% of measurements may be not achieved due to rain rates > 1.5 mm/h according to geographic areas).

As for rejected measurements through the validation process, an average of **22.38%** of ocean measurements are removed, the majority of which is due to the sea ice flag $\approx 17.4%$ while $\approx 5.7%$

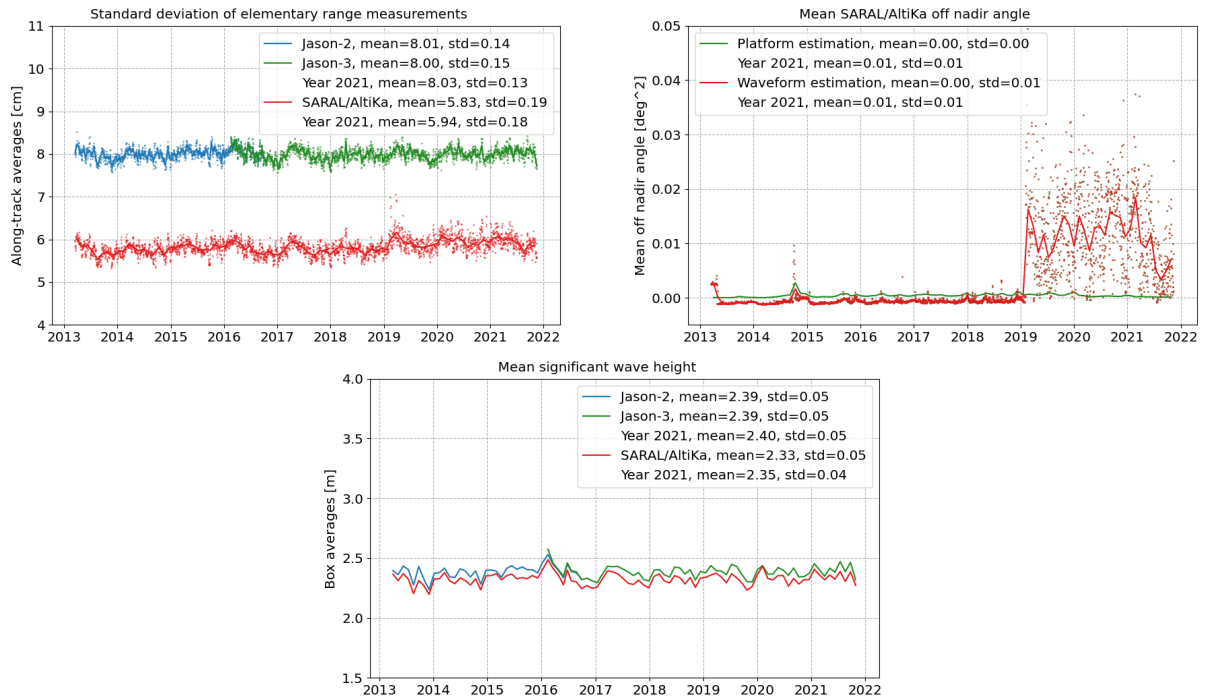


Figure 2: Monitoring of along track averages of standard deviation of range measurements (left), of retracking and platform mispointing (right), and latitude weighted box average of significant wave height (bottom).

are removed by threshold criteria. A higher percentage of rejected measurements is observed since the beginning 2019, it is mainly due to out of threshold off nadir values. These values are the result of attitude deviations experienced by the spacecraft since the star sensor anomaly, starting early February 2019. Please keep in mind that only valid data is used to compute the following metrics, hence all mispointing events (square off-nadir angle $> 0.09deg^2$) are properly discarded during the validation process and do not significantly skew the statistics.

Crossovers analysis

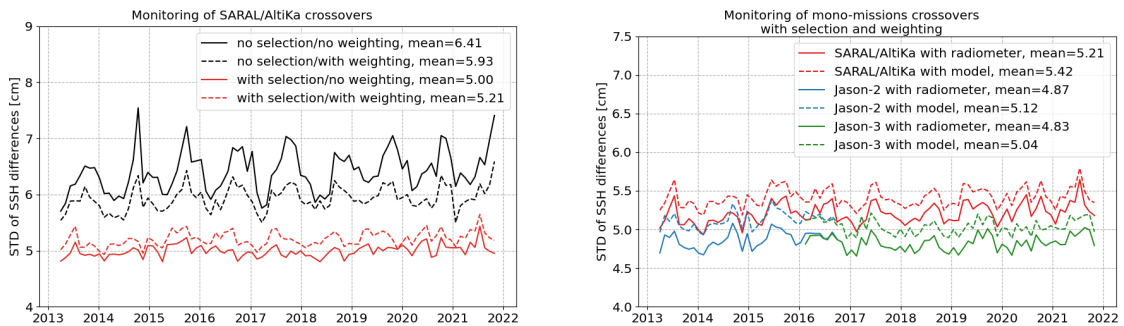


Figure 3: Cycle per cycle monitoring of standard deviation of SSH differences at mono-mission crossovers - cycles 1 to 155.

At each crossover, the observed difference of SSH measurements between ascending and descending arcs results from the sum of errors in the system and ocean variability. In order to reduce the impact of ocean variability, an additional selection can be applied to remove shallow waters (bathymetry above -1000 m), areas of high ocean variability (variability above 20 cm rms) and high latitudes ($|lat| < 50$ deg). To account for the uneven distribution of crossover points, we estimate weighted statistics (figure 3) where the weights applied are based on the crossovers density. This allows to better compare two missions that do not share the same ground track. Similar results are obtained with these weighted statistics: SARAL/AltiKa’s performance is excellent and slightly below Jason’s. Please note that the late mispointing events have as expected no visible impact over SARAL/AltiKa’s crossovers’ accuracy.

Sea level anomaly

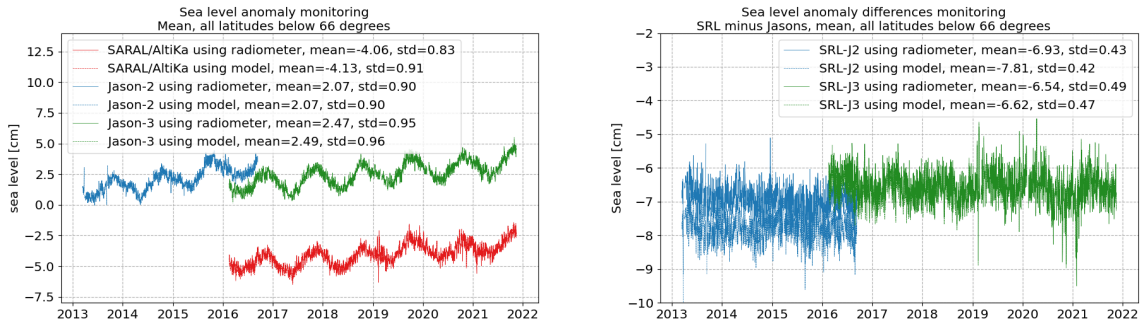


Figure 4: *Monitoring of daily mean (left) of SLA of GDR data using the radiometer (plain lines) and the model (dotted lines) wet tropospheric corrections. Global statistics are estimated for all latitudes between -66 and 66 deg*

Looking at along-track SLA provides additional metrics to estimate the altimetry system performances. The evolution of the mean SLA allows the detection of shifts, drifts or geographically correlated biases, while looking at the SLA variance may also highlight changes in the long-term stability of the altimeter’s system performance. SARAL/AltiKa and Jason-3 daily mean of SLA show similar signals and evolution. The standard deviation of daily averages of SLA differences is below **5 mm**. A slight drift is observed since 2019 and is under investigation. Switching from the radiometer to the model wet tropospheric correction has little impact on daily averages of SLA differences between SARAL/AltiKa and Jason-3.

Particular Investigation : Ocean error budget

The following table summarizes the study on SARAL/AltiKa's ocean error budget detailed in the annual report (2021).

Error type	Req	Goals	Short scales (< 7km)		Large wavelength short time scales (> 50 km, < 10 days)	
			GDR-D	GDR-F	GDR-D	GDR-F
Altimeter Noise	1.5 cm	1 cm	0.83 cm	0.83 cm	-	-
Sea state bias	2 cm	2 cm	0.18 cm	0.15 cm	TBI	TBI
Wet troposphere	1.2 cm	1 cm	TBI	TBI	1.1 cm	1.0 cm
Dry troposphere	0.7 cm	0.7 cm	-	-	0.7 cm	0.7 cm
Ionosphere	0.3 cm	0.3 cm	-	-	0.3 cm	0.3 cm
Altimeter range after corrections	2.9 cm (RSS)	2.6 cm (RSS)	0.73 cm	0.74 cm	TBI	TBI
Orbit radial component	3 cm	2 cm	-	-	1.3 cm	0.80 cm
Total sea surface height	4.2 cm	3.2 cm	0.73 cm	0.74 cm	3.7 cm	3.5 cm
Significant wave height	6.3 cm	3.9 cm	5.1 cm	5.1 cm	-	-
Sigma naught Absolute Value after in-flight calibration	0.7 dB	0.5 dB	0.016 dB	0.016 dB	-	-
Wind speed	1.7 m/s	1 m/s	0.15 m/s	0.18 m/s	-	-

Table 1: *GDR-D and GDR-F estimated error budget*