

Jason-1 GDR Quality Assessment Report

Cycle 021

01-08-2002 11-08-2002

Prepared by:	G. Pontonnier, CLS	
	M. Ablain, CLS	
	B. Soussi, CLS	
	P. Thibaut, CLS	
	MH. De Launay, CLS	
Accepted by :	J. Dorandeu, CLS	
Approved by :	P. Vincent, CNES	









1 Introduction. Document overview

The purpose of this document is to report the major features of the data quality from the Jason-1 mission. The document is associated with data dissemination on a cycle by cycle basis. This document reports results from Jason-1 GDRs.

The objectives of this document are:

To provide a data quality assessment

To provide users with necessary information for data processing

To report any change likely to impact data quality at any level, from instrument status to software configuration

To present the major useful results for the current cycle

It is divided into the following topics:

General quality assessment and cycle overview Poseidon-2 altimeter and sensor CALVAL main results Jason-1 Long term performance monitoring Particular investigations General warnings

2 General quality assessment and cycle overview

2.1 Software version

This cycle has been produced with the CMA Reference Software V6.0_08. The content of this science software version is described in (Vincent et al., 2003 [1]).

2.2 Cycle quality and performances

Data quality for this cycle appears to be nominal. Analysis of crossovers and sea surface variability indicate that system performances are close to nominal values that are obtained from the TOPEX/POSEIDON data. For this cycle, the crossover standard deviation is 7.03 cm rms. When using a selection to remove shallow waters (1000 m), areas of high ocean variability and high latitudes (> |50| deg.) it lowers to 6.13 cm rms. The standard deviation of Sea Level Anomalies (SLA) relative to a 7-year mean (based on T/P data) is 10.51 cm.

- Performances from crossover differences are detailed in the dedicated section Crossover statistics.
- Detailed CALVAL results are presented in **section 4**.

2.3 Missing measurements

Due to a calibration performed over ocean, pass 113 has a few missing measurements close to the south America coasts in open ocean. Missing measurements relative to a nominal ground track are plotted on **section Missing measurements**.

3 Poseidon-2 altimeter and sensor

3.1 Sensor status

A detailed assessment of the Poseidon-2 sensor is made in separate bulletin to be found on the AVISO website.

3.2 Poseidon-2 altimeter status

This section presents the general status of the altimeter for main instrumental variations through the Jason-1 mission. Two calibration modes are performed to monitor the altimeter internal drifts and to compute the altimetric parameters. They are programmed about three times per day, over land.

The CAL1 mode measures the Point Target Response (PTR) of the altimeter in Ku and C bands. Among the parameters extracted from the PTR are :

- the internal path delay
- the total power in the PTR


The evolutions of these parameters as a function of time are plotted to monitor the ageing of the altimeter.

Notice that in the Jason-1 products, the range is corrected for the internal path delay and the backscatter coefficient takes into account the total power of the measured PTR.

3.2.1 Monitoring of the internal path delay


POSEIDON2 - Cycle 001 to Cycle 021

Difference of travel between E and R lines of the PTR in Ku band

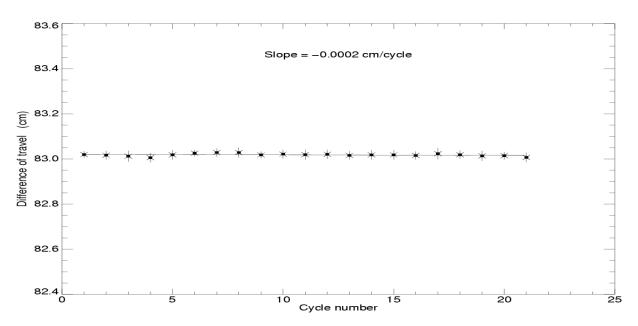

POSEIDON2 - Cycle 021


Difference of travel between E and R lines of the PTR in C band

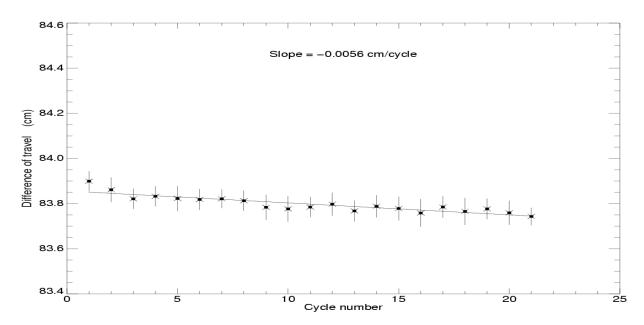

3.2.2 Monitoring of the total power in the PTR


POSEIDON2 - Cycle 021

Total power of the PTR in Ku band

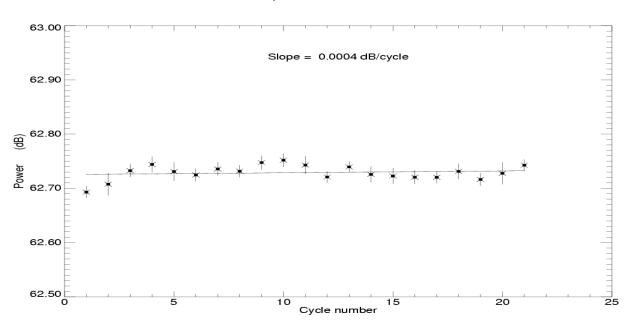

POSEIDON2 - Cycle 021

Total power of the PTR in C band

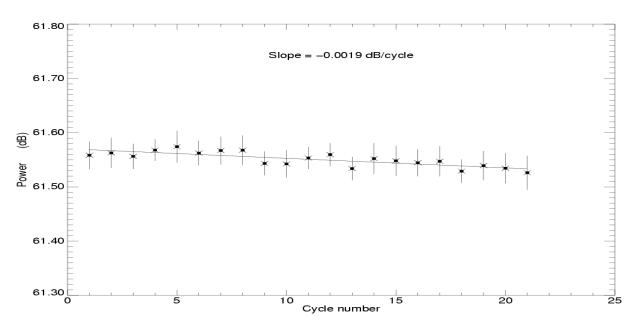


4 CALVAL main results

This section presents results that illustrate data quality during this cycle. These verification products are produced operationally so that they allow systematic monitoring of the main relevant parameters.

4.1 Missing measurements

The map below illustrates missing 1Hz measurements in the GDRs, with respect to a 1 Hz sampling of a nominal repeat track.

Missing measurements Jason–1 Cycle 021 (01/08/2002 / 11/08/2002)

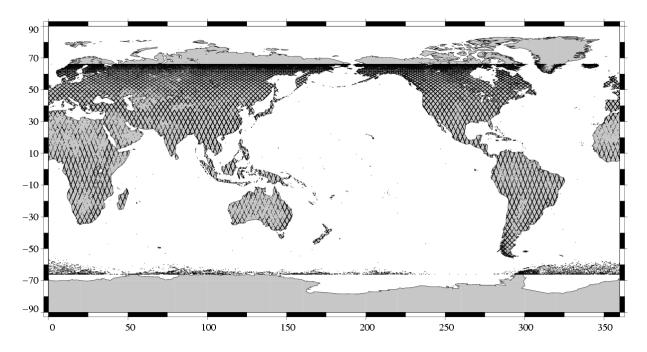





4.2 Edited measurements

Editing criteria are defined for the GDR product in Aviso and PODAAC User Handbook [2]. The editing criteria are defined as minimum and maximum thresholds for various parameters. Measurements are edited if at least one parameter does not lie within those thresholds. These thresholds are expected to remain constant throughout the Jason-1 mission, so that monitoring the number of edited measurements allows a survey of data quality.

In the following, the altimeter state flag (alt_state_flag) is used instead of the radiometer state flag (rad_state_flag). Indeed, this allows to keep more data near the coasts and then to detect potential anomalies in these areas. Furthermore, there is no impact on global performance estimations since the more significant results are derived from analyses in open ocean areas. The rain flag is not used for data selection since it is not yet tuned.


The number and percentage of points removed by each criterion is given on the following table. Note that these statistics are obtained with measurements already edited for altimeter land flag (13.93 % of points removed) and ice flag (9.45 % of points removed).

Parameters	Min thresh-	Max thresh-	Unit	Nb	% re-
	old	old		removed	moved
Sea surface height	-130.000	100.000	m	10517	2.01
Sea level anomaly	-10.000	10.000	m	14921	2.85
Nb measurements of range	10.000	-	_	13272	2.53
Std. deviation of range	0.000	0.200	m	13543	2.59
Square off nadir angle	-0.200	0.160	deg^2	10909	2.08
Dry tropospheric correction	-2.500	-1.900	m	46	0.01
Inverted barometer correction	-2.000	2.000	m	33	0.01
JMR wet tropospheric	-0.500	-0.001	m	597	0.11
correction					
Ionospheric correction	-0.400	0.040	m	11623	2.22
Significant wave height	0.000	11.000	m	8016	1.53
Sea State Bias	-0.500	0.000	m	8361	1.60
Backscatter coefficient	7.000	30.000	dB	6921	1.32
Ocean tide	-5.000	5.000	m	4983	0.95
Equilibrium tide	-0.500	0.500	m	0	0.00
Earth tide	-1.000	1.000	m	0	0.00
Pole tide	-15.000	15.000	m	0	0.00
Altimeter wind speed	0.000	30.000	$m.s^{-1}$	10335	1.97
Global statistics of edited	_	_	_	24126	4.61
measurements by thresholds					


4.2.1 Figures

The following two maps are complementary: they show respectively the removed and selected measurements in the editing procedure.


Edited measurements Jason–1 Cycle 021 (01/08/2002 / 11/08/2002)

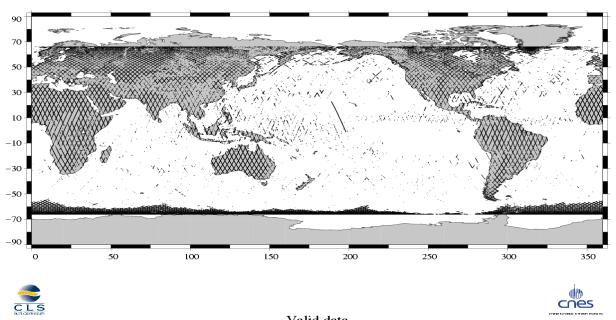

Valid data Jason-1 Cycle 021 (01/08/2002 / 11/08/2002)

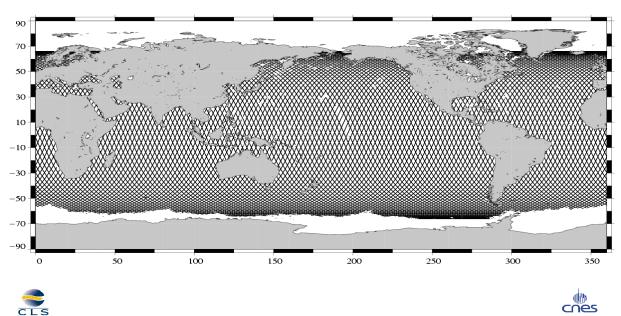

Percentage of valid data relative to the nominal pass Jason-1 Cycle 021 (01/08/2002 / 11/08/2002)

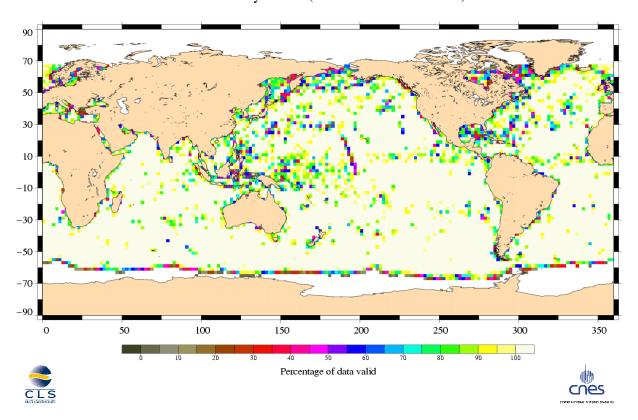

4.2.2 Comments

Pass 210 is partly edited (15%) as a result of altimeter parameters set to default. This is due to a Star tracker unavailability of around 10 minutes.

For the purpose of this quality assessment report, the GOT99.2 GDR field tide model has been replaced by GOT99.3 since the former is not available over the Black Sea, the Caspian and the Baltic sea.


Wet zones appear in the plot of removed data, as it was also the case for Topex and Poseidon altimeters: measurements may be corrupted by rain.

Compared with the usual maps obtained for Topex, there are less removed data in these zones and in the areas of strong sea states.

4.3 Altimeter parameters

In order to assess and to monitor altimeter parameter measurements, histograms of Jason-1 Kuband Significant Wave Height (SWH), Backscatter coefficient (Sigma0) and RMS of altimeter range are computed for the valid data set previously defined.

Ku-band Significant Wave Height (unit:cm)

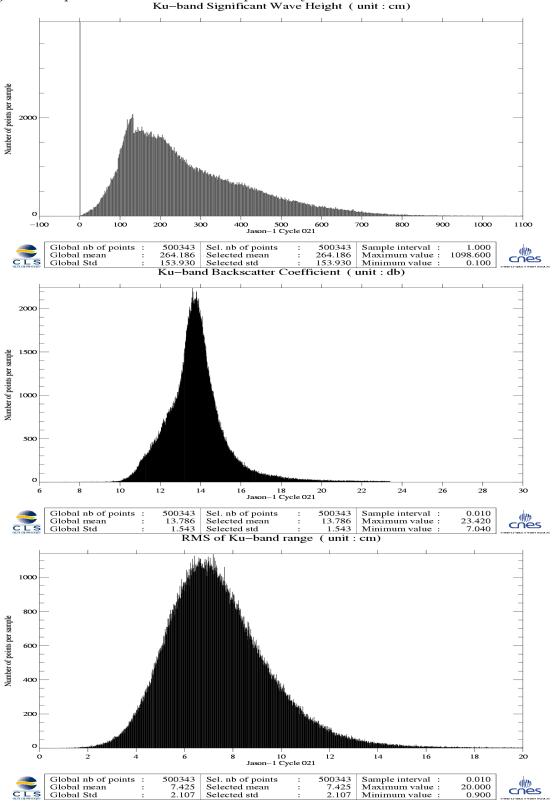

4.4 Crossover statistics

SSH crossover statistics are computed from the valid data set. They are used to estimate the data quality and to monitor the system performances.


After data editing and using the standard Jason-1 algorithms, the crossover standard deviation is about 6.13 cm rms, when using a selection to remove shallow waters (1000 m), areas of high ocean variability and high latitudes (> |50| deg.).

4.5 SSH variability

4.5.1 Jason-1 Sea Level Anomalies

Repeat-track analysis is routinely used to compute Sea Level Anomalies (SLA) relative to the previous cycle and relative to a mean profile. SLA relative to a 7-year mean (based on TOPEX/Poseidon data) shows general oceanic features in good agreement with what is observed with TOPEX/Poseidon.


The SSH differences relative to the previous cycle 020 are plotted on the bottom figure. The differences seem homogeneous and do not exhibit any particular trackiness pattern, showing the good quality of the orbit calculation in the Jason-1 GDRs.

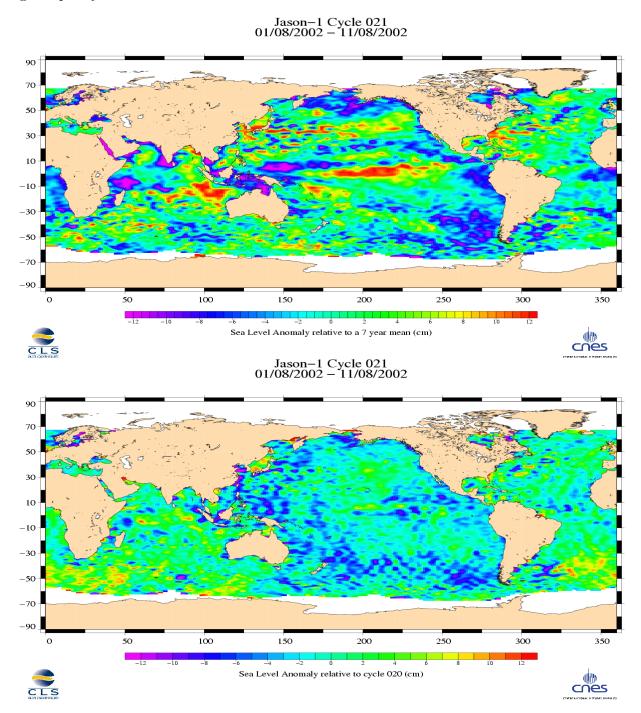


Jason-1 GDR Quality Assessment Report Cycle **021** 01-08-2002 11-08-2002 SALP-RP-P2-EX-21072-CLS021

4.5.2 Comparison to a Mean Sea Surface


The two following maps respectively show the map of Jason-1 SLA relative to the MSS and differences higher than a 30 cm threshold (after centering the data). The latter figure shows that apart from isolated measurements that should be removed after refining the editing thresholds, higher differences are located in high ocean variability areas, as expected.

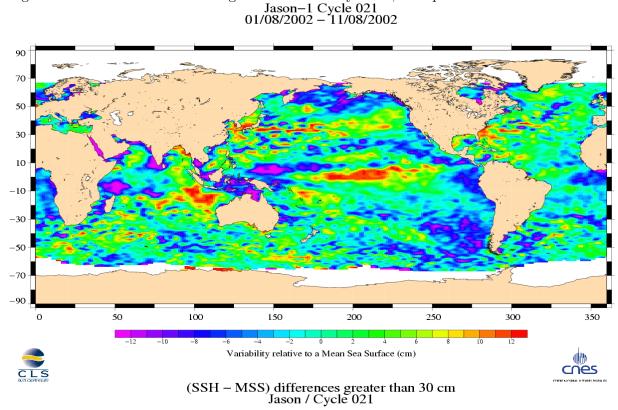


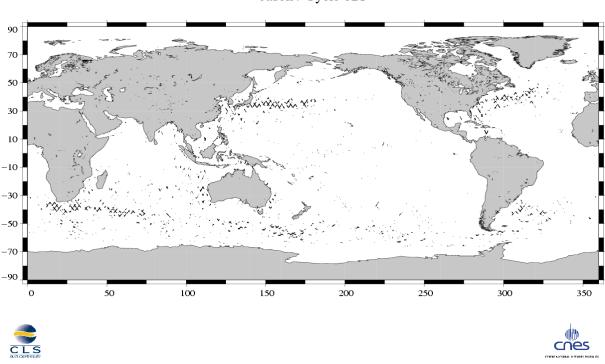

4.6 Wind and wave maps

These two figures show wind and wave estimations derived from 10 days of altimeter measurements.

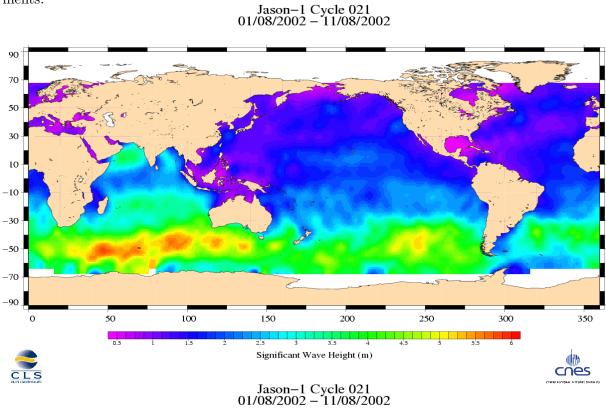

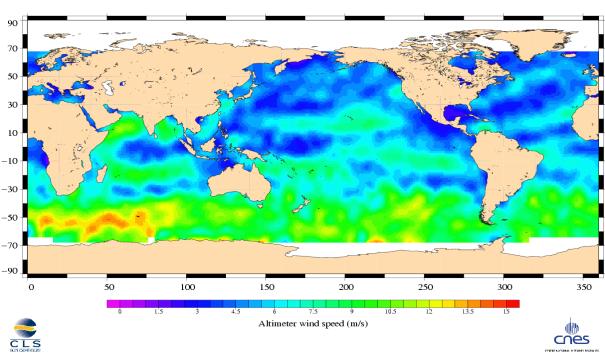

5 Jason-1 long term performance monitoring


Statistics of SSH variability are computed after crossover and repeat-track analyses. This allows to estimate how Jason-1 data fulfill the mission objectives in terms of performances.

5.1 Crossover standard deviation

This parameter is plotted as a function of time in a one cycle per cycle basis in the figure below. It is computed after data editing with two different selections:

- selecting crossover differences lower than $30~\mathrm{cm}$ to avoid contamination by remaining spurious data.
- Removing shallow waters (1000 m), areas of high ocean variability and high latitudes (> |50| deg.) to avoid ice coverage effects.


Crossover standard deviation

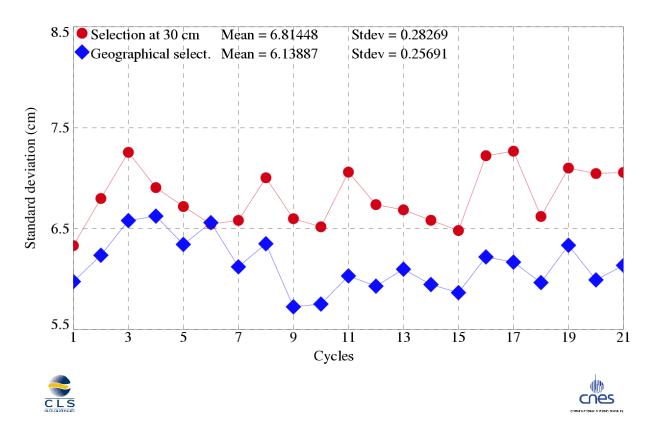

5.2 RMS of Sea Level Anomaly

Sea Level Anomalies relative to a mean profile are computed using repeat-track analysis for each Jason-1 cycle. To monitor Jason-1 performances and ocean signals, the cycle per cycle standard deviation of the SLA is plotted as a function of time.

Standard deviation of Sea Level Anomalies

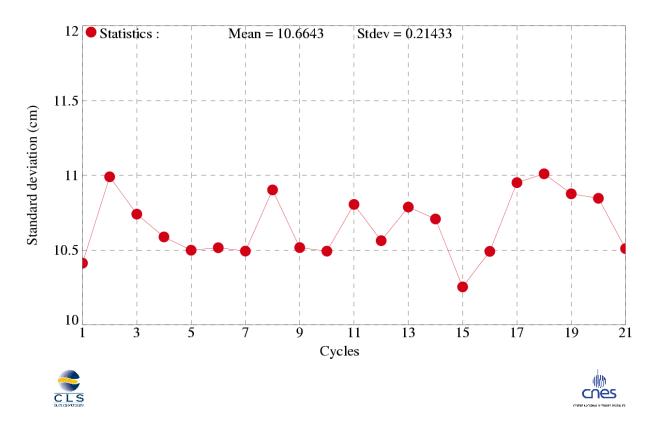

6 Particular investigations

6.1 Square of the mispointing angle

During pass 250, a Star tracker unavailability leads to slightly higher than usual off nadir angles values on this pass (0.13 deg), with no impacts on scientific applications.

6.2 TP – Jason-1 cross-calibration results


Jason-1 cycle 021 data are collocated to data from TOPEX GDR cycle 364 in order to compare the main parameters from repeat-track analysis.


6.2.1 TP - Jason-1 Ku SWH differences

The global statistics of (TP - Jason-1) Ku SWH differences are:


Number of estimates	Mean	Standard deviation	
423545	$8.593 \mathrm{~cm}$	20.699 cm	

These differences are plotted on the following figure (data are centered about the mean value):



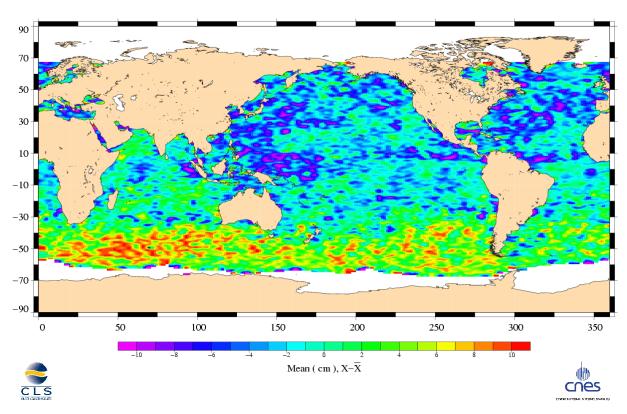

The scatter plot between Jason-1 and TOPEX Ku SWH measurements is given on the following figure:

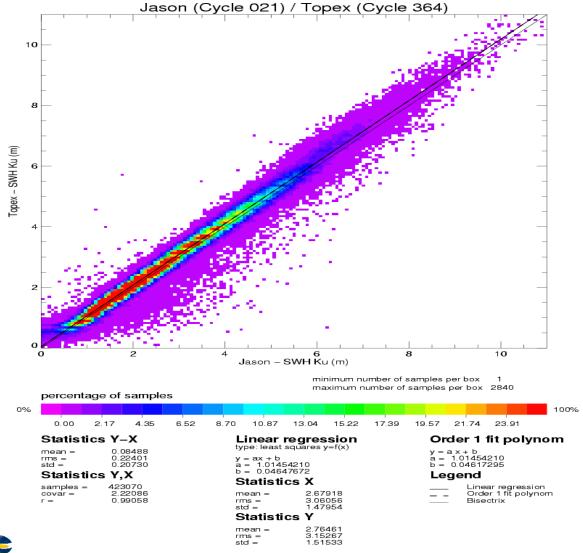




6.2.2 TP – Jason-1 Ku Sigma0 differences

The global statistics of (TP - Jason-1) Ku Sigma0 differences are:


Number of estimates	Mean	Standard deviation	
423545	-2.384 dB	0.148 dB	

Keep in mind that, in the science ground processing, Jason-1 Ku-band sigma naughts are biased by a -2.26 dB value to get the geophysical quantities such as the altimeter wind speed. This value compares very well with the mean difference reported in the above table. These differences are plotted on the following figure (data are centered about the mean value):

Ku SIGMA0 differences Topex (Cycle 364) – Jason (Cycle 021)

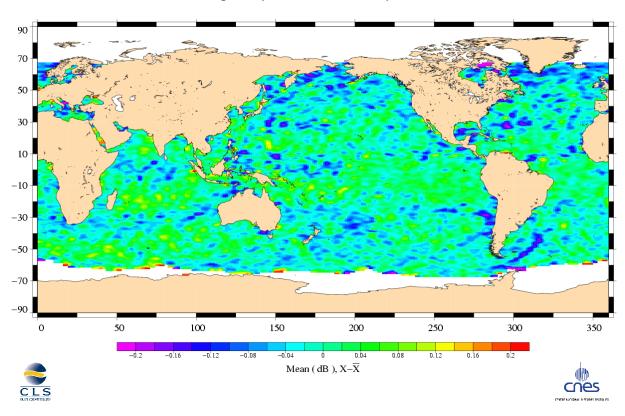

The scatter plot between Jason-1 and TOPEX Ku Sigma0 measurements is given on following figure:

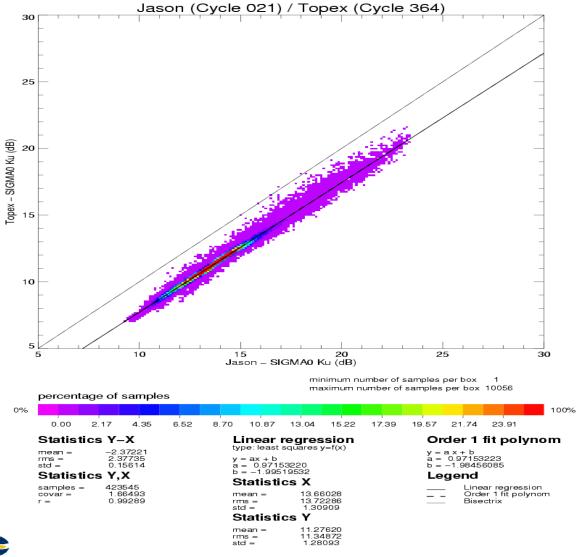




6.2.3 TP – Jason-1 dual-frequency ionosphere correction differences

The global statistics of (TP - Jason-1) dual-frequency ionosphere correction differences are:


Number of estimates	Mean	Standard deviation	
423545	-0.258 cm	$1.169~\mathrm{cm}$	

These differences are plotted on the following figure (data are centered about the mean value):

Altimeter ionospheric correction differences Topex (Cycle 364) – Jason (Cycle 021)

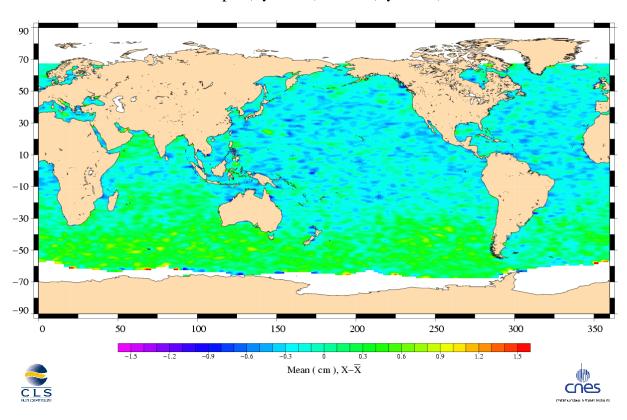

The scatter plot between Jason-1 and TOPEX dual-frequency ionosphere corrections is given on the following figure:

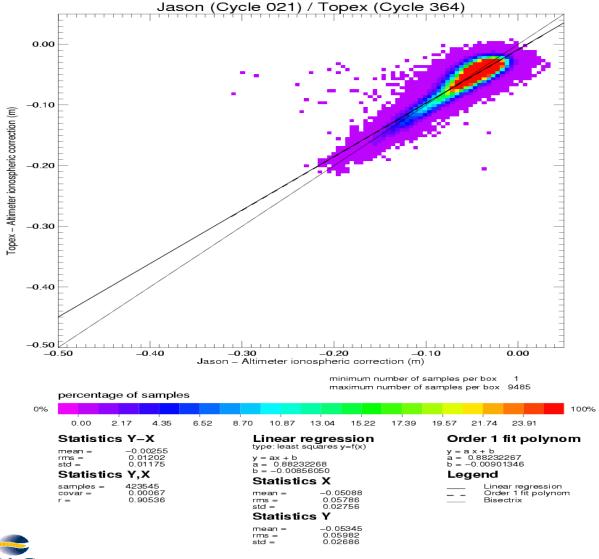


6.2.4 TP – Jason-1 radiometer wet troposphere correction differences


The global statistics of (TP - Jason-1) radiometer wet troposphere correction differences are:

Number of estimates	Mean	Standard deviation	
423545	-0.381 cm	$0.508 \mathrm{\ cm}$	


Note that the TMR wet tropospheric correction has been corrected for the drift (Ruf C.S., 2002 [4]) before performing these comparisons with the JMR correction.

The differences between JMR and TMR corrections are plotted on the following figure (data are centered about the mean value) :



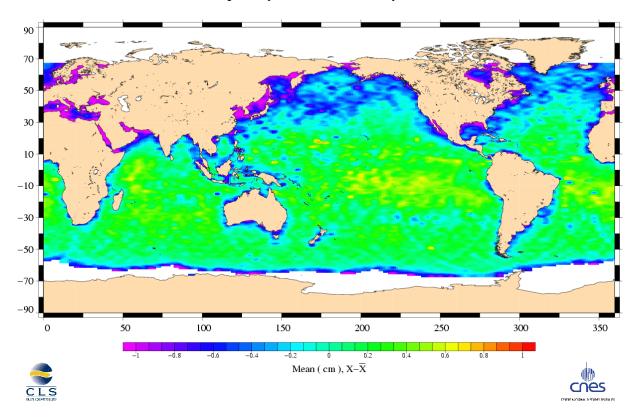

The scatter plot between Jason-1 and TOPEX radiometer wet troposphere corrections is given on the following figure:

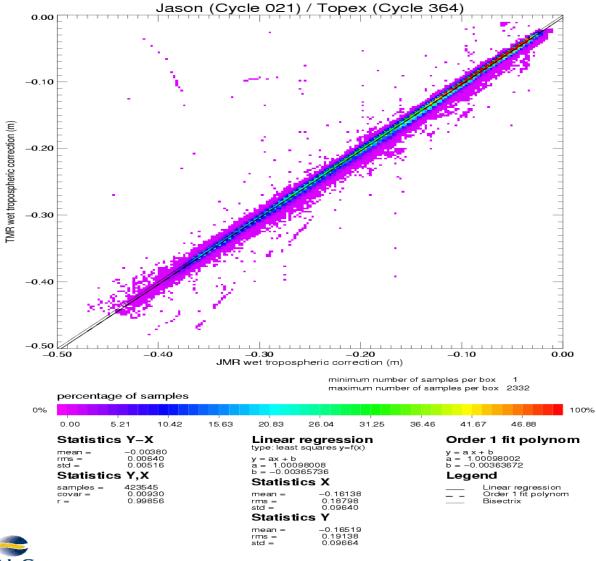

6.2.5 TP – Jason-1 SSH differences

In order to compare the TOPEX SSH with the Jason-1 SSH, TOPEX GDRs have been updated with the non parametric sea state bias estimated on Topex-B data, all the other corrections remaining similar to Jason-1.

Note that TOPEX-B non-parametric sea state bias has been computed with the same method as TOPEX-A (Gaspar et al., 2002 [3]).

The global statistics of (TP - Jason-1) corrected SSH differences lead to :

	Number of estimates	Mean	Standard deviation
Corrected SSH	423388	-13.724 cm	3.638 cm

To illustrate these comparisons, the following figures show corrected SSH (TP-Jason-1) differences, SLA maps from Jason-1 GDR cycle 021 and TOPEX GDR cycle 364. Note that data are centered about the mean value.


90
70
50
30
10
-10
-30
-50
-70
-90
0
50
100
150
200
250
300
350

CLS


Mean (cm), X-X

SLA differences Topex (Cycle 364) – Jason (Cycle 021)

SLA Jason Cycle 021 (01/08/2002 – 11/08/2002)

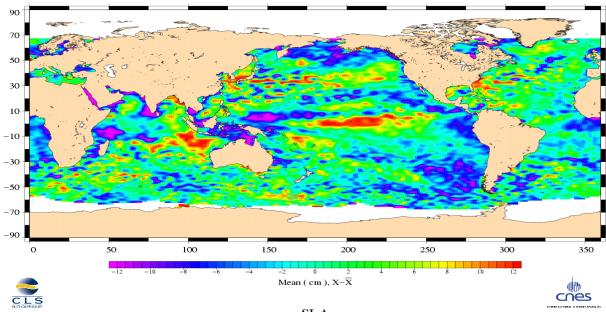

SLA Topex Cycle 364 (01/08/2002 – 11/08/2002)

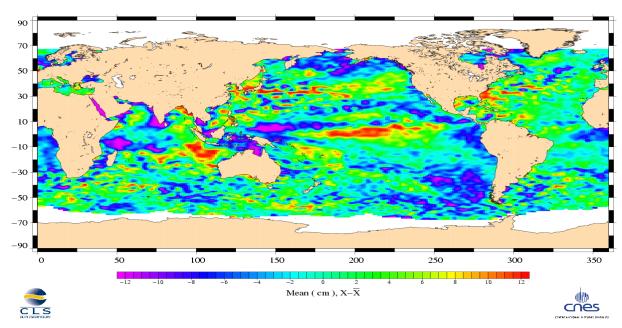

7 General warnings

7.1 Altimeter wind speed default values: minor warning

The altimeter wind speed algorithm was adjusted on TOPEX data before the Jason-1 launch. It gives very few negative values which are set to default values in the GDR. The user may note that a valid SSB value is present in the product when altimeter wind speed values are set to default: this is because negative wind values enter the SSB algorithm; such a feature remain to be corrected to clean up the wind algorithm. It is also clear that the wind algorithm should be better tuned to Jason-1 data in the near future.

References

- [1] Vincent, P., Desai S.D., Picot N. & Case K., April 8, 2003: The first generation of IGDRs and GDRs products to be made available after completion of the Jason-1 verification phase. *Memo to Jason-1 PIs and CoIs.*
- [2] Aviso and PODAAC User Handbook, April 2003 : IGDR and GDR Jason User Products, SMM-MU-M5-OP-13184-CN.
- [3] Gaspar, P., S. Labroue & F. Ogor, October 2002: Improving nonparametric estimates of the sea state bias in radar altimeter measurements of sea level *J. Atmos. Oceanic Technol.*, **19**, 1690-1707.
- [4] Ruf C.S., June 2002: TMR Drift Correction to 18 GHz Brightness Temperatures, Revisited. Report to TOPEX Project.