



SWOT Nadir GDR Synthetic cyclical Cal/Val report

Cycle 011

2024-02-14 21:04:37 to 2024-03-06 17:49:41

Processing Baseline F v1.04

Reference: SALP-RP-MAO-OP-17755-CN-011

Nomenclature: SWOT Nadir GDR Synthetic cyclical Cal/Val report

Issue: 01/ 00

Date: May 28, 2024

Project:	SALP MISSION PERFORMANCE SERVICE FOR SWOT NADIR MISSION		
Title:	SWOT Nadir GDR Synthetic cyclical Cal/Val report		
Author(s):	A. Nouvel de la Flèche, CLS H. Roinard, CLS		
Approved by:	F. Bignalet-Cazalet, CNES	Application authorized by:	N. Picot, CNES

Table of Content

1	Introduction	4
2	Cycle overview	5
3	Data coverage and edited measurement	7
3.1.	Data coverage	7
3.2.	Edited measurements	8
4	Geophysical parameter analysis	12
4.1.	Significant Wave Height	12
4.2.	Backscattering coefficient	15
4.3.	Altimeter Wind Speed	17
4.4.	Ionospheric correction	19
4.5.	Mispointing	22
4.6.	Radiometer parameters	24
5	Sea Surface Height Anomaly	26
6	Crossover Analysis	29
6.1.	Mono mission crossover	29
6.2.	Multi-mission crossover	31
7	Conclusion	32

1 Introduction

SWOT (Surface Water Ocean Topography) is a joint project including NASA, CNES, the Canadian Space Agency and the UK Space Agency. The SWOT satellite carries onboard a wide-swath altimeter-interferometer in Ka-Band (KaRIn), a classical nadir-looking altimeter, as well as the usual complement on altimetry satellites: precise location systems and radiometer.

The SWOT Nadir Quality Assessment reports are generated under SALP contract supported by CNES at the CLS Environment & Climate Business Unit.

A detailed description of the mission is available on AVISO website (<https://www.aviso.altimetry.fr/en/missions/current-missions/swot.html>). Products description can be found in the SWOT Level-2 Nadir Altimeter products User Guide (https://www.aviso.altimetry.fr/fileadmin/documents/data/tools/SALP-ST-M-EA-17043-CN_0104.pdf) and dataset standards are described in Jason-3 GDR-F user handbook (https://www.aviso.altimetry.fr/fileadmin/documents/data/tools/hdbk_j3.pdf).

The purpose of this document is to report the major features of the data quality from the SWOT Nadir mission over ocean. The objectives are to:

- Provide a data quality assessment
- Provide users with necessary information for data processing
- Report any change likely to impact data quality at any level, from instrument status to software configuration
- Present the major useful results for this cycle.

2 Cycle overview

This document reports results from SWOT Nadir GDRs over cycle 011, spanning from 2024-02-14 21:04:37 to 2024-03-06 17:49:41.

This cycle has been produced with the Processing Baseline F v1.04, and the processing software references L1 library=V5.8.4, L2 library=V6.10p1p2p3p4p5, Processing Pilot=5.1.0.

Due to SSR anomaly 582 / 584 netCDF pass files are provided.

SWOT Nadir is able to track data with several onboard tracker modes: POSEIDON-3C instrument implements three main tracking modes:

- The autonomous acquisition and tracking mode (M1),
- The DIODE acquisition and autonomous tracking mode (M2),
- The DIODE & DEM mode (M3).

and certain automatic transitions can also be authorized by the user, as is the case in M4 to M4bis modes. Over cycle 011, SWOT Nadir altimeter (POS-3C) operates in DIODE + DEM tracking with auto transition and direct transition from Open Loop to Close Loop (=M4bis mode)

Users are advised of the following known limitations in the dataset:

- The adaptive retracker has not yet been calibrated, so the adaptive retracker variables should be used with caution.

Over this cycle, the following specific events happened :

- SSR anomaly on 2024-02-25 from 00:35:00 to 03:17:00
- SSR anomaly on 2024-03-02 from 14:28:00 to 16:21:00

The main metric that describes the data quality is the one derived from the analysis of sea surface variability at crossovers. Using a selection to remove shallow waters (1000 m), areas of high ocean variability and high latitudes ($> |50^\circ|$), the crossover standard deviation over the cycle is 4.81 cm for SWOT Nadir MLE4. This first metric is in line with usual values that are obtained on altimetry mission.

Summary of the main performances are listed in the table 1:

Cycle 011	MLE4	Adaptive
Percentage of missing measurements over open ocean	0.45 %	
Percentage of rejected measurements over open ocean	14.90 %	14.24 %
of which rejected due to sea ice	12.67 %	
of which rejected with threshold verification (after land and ice removed)	2.22 %	1.57 %
Crossover standard deviation on geographical selection	4.81 cm	5.03 cm

Table 1: Summary of cycle 011 performances over open ocean.

3 Data coverage and edited measurement

This section presents results that illustrate data quality over this cycle. These products' verifications are produced operationally, to allow long-term monitoring of missing and edited measurements.

3.1. Data coverage

The map below (Figure 1) illustrates 1Hz missing measurements relative to the satellite nominal ground track for SWOT Nadir GDR dataset.

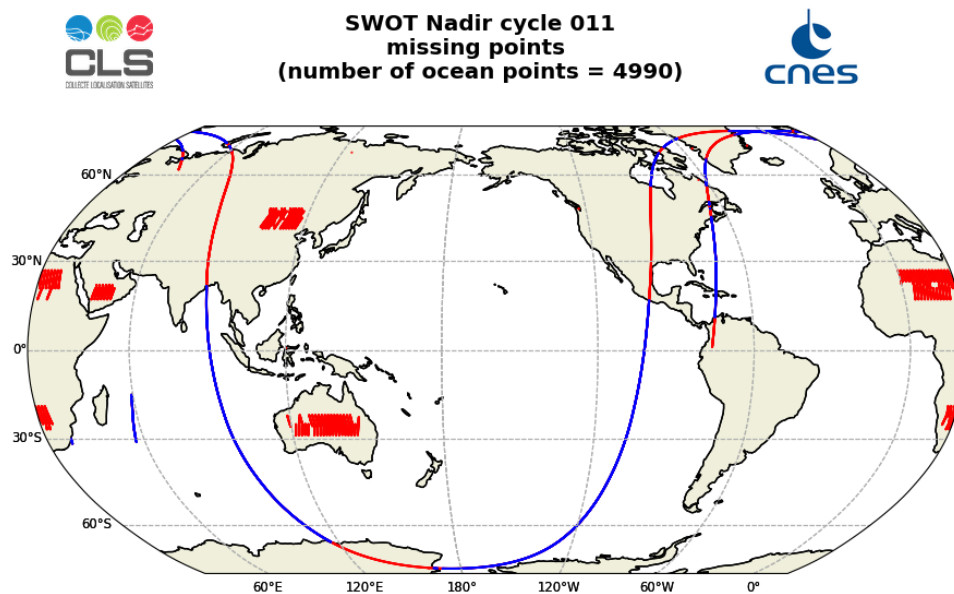


Figure 1: Map of missing measurements for SWOT Nadir GDR cycle 011

Over this cycle, there are missing data over ocean for :

- 2024-02-25 from 01:01:36 to 03:17:13 due to SSR anomaly (impacting passes 285 to 288 with respectively 43.19%, 100%, 100% and 15.13% of missing data over ocean)
- pass 469 on 2024-03-02 from 14:38:27 to 14:43:10 : 15.51 % over ocean (SSR anomaly) over Indian ocean
- pass 471 on 2024-03-02 from 16:21:11 to 16:21:39 : 2.77 % over ocean (SSR anomaly) near eastern coast of south africa

Data gaps over ocean are distributed as follows:

- Pass 285
 - duration: 125.632s, from 2024-02-25 01:04:33 (11.026N, -74.634E) to 01:06:38 (18.21N, -73.477E) : 18.734s, from 2024-02-25 01:06:44 (18.524N, -73.424E) to 01:07:02 (19.594N, -73.24E) : 438.61s, from 2024-02-25 01:07:09 (19.972N, -73.174E) to 01:14:28 (44.766N, -67.044E) : 3.306s, from 2024-02-25T01:15:24 (47.886N, -65.809E) to 01:15:27 (48.069N, -

65.731E) : 17.632s, from 2024-02-25T01:15:49 (49.285N, -65.193E) to 01:16:07 (50.256N, -64.74E) : 5.51s, from 2024-02-25T01:17:57 (56.253N, -61.344E) to 01:18:02 (56.55N, -61.144E) : 167.509s, from 2024-02-25T01:18:05 (56.668N, -61.062E) to 01:20:52 (65.392N, -52.67E) : 2.204s, from 2024-02-25T01:25:13 (76.183N, -19.556E) to 01:25:16 (76.24N, -19.084E) : 135.55s, from 2024-02-25T01:25:18 (76.296N, -18.609E) to 01:27:33 (77.536N, 15.702E)

- Pass 286 :
 - duration: 176.325s, from 2024-02-25 01:27:42 (77.451N, 17.996E) to 01:30:38 (72.443N, 52.657E)
 - duration: 8.816s, from 2024-02-25 01:31:07 (71.23N, 56.202E) to 01:31:16 (70.844N, 57.201E)
 - duration: 9.918s, from 2024-02-25 01:31:19 (70.698N, 57.566E) to 01:31:29 (70.254N, 58.627E)
 - duration: 1.102s, from 2024-02-25 01:31:38 (69.855N, 59.53E) to 01:31:39 (69.804N, 59.641E)
 - duration: 2.204s, from 2024-02-25 01:31:42 (69.653N, 59.969E) to 01:31:45 (69.552N, 60.185E)
 - duration: 1574.81s, from 2024-02-25 01:46:26 (21.562N, 87.429E) to 02:12:41 (-66.542N, 116.058E)
 - duration: 8.816s, from 2024-02-25 02:17:49 (-77.447N, 163.834E) to 02:17:57 (-77.529N, 166.122E)
 - duration: 1856.932s, from 2024-02-25 02:18:08 (-77.603N, 169.018E) to 02:49:05 (16.687N, -99.619E)
- Pass 287
 - duration: 142.162s, from 2024-02-25T03:00:46 (56.005N, -87.395E) to 2024-02-25T03:03:08 (63.487N, -80.914E)
 - duration: 68.326s, from 2024-02-25 03:03:16 (63.881N, -80.459E) to 03:04:24 (67.28N, -75.75E)
 - duration: 3.306s, from 2024-02-25 03:04:33 (67.705N, -75.04E) to 03:04:37 (67.864N, -74.767E)
 - duration: 1.102s, from 2024-02-25 03:04:45 (68.284N, -74.018E) to 03:04:46 (68.337N, -73.923E)
 - duration: 89.264s, from 2024-02-25 03:05:38 (70.718N, -68.859E) to 03:07:07 (74.325N, -56.735E)
 - duration: 1.102s, from 2024-02-25 03:09:47 (77.659N, -20.787E) to 03:09:48 (77.661N, -20.492E)
 - duration: 1.102s, from 2024-02-25 03:09:55 (77.668N, -18.723E) to 03:09:56 (77.669N, -18.428E)
- Pass 288
 - duration :159.795s, from 2024-02-25 03:09:58 (77.667N, -17.838E) to 03:12:38 (74.507N, 18.632E)
 - duration: 122.326s, from 2024-02-25 03:12:43 (74.352N, 19.372E) to 03:14:45 (69.25N, 34.919E)
 - duration: 6.612s, from 2024-02-25 03:15:48 (66.238N, 40.126E) to 03:15:54 (65.911N, 40.597E)
- Pass 469: duration: 282.297s, from 2024-03-02 14:38:27 (-31.238N, 56.489E) to 14:43:10 (-15.184N, 59.522E)
- Pass 471: duration: 28.239s, from 2024-03-02T16:21:11 (-31.833N, 30.462E) to 16:21:39 (-30.236N, 30.823E)

The monitoring of the percentage of missing measurements is represented in Figure 2. Values have been computed over ocean for each track of the cycle. The mean percentage is equal to 0.45 % over the complete cycle.

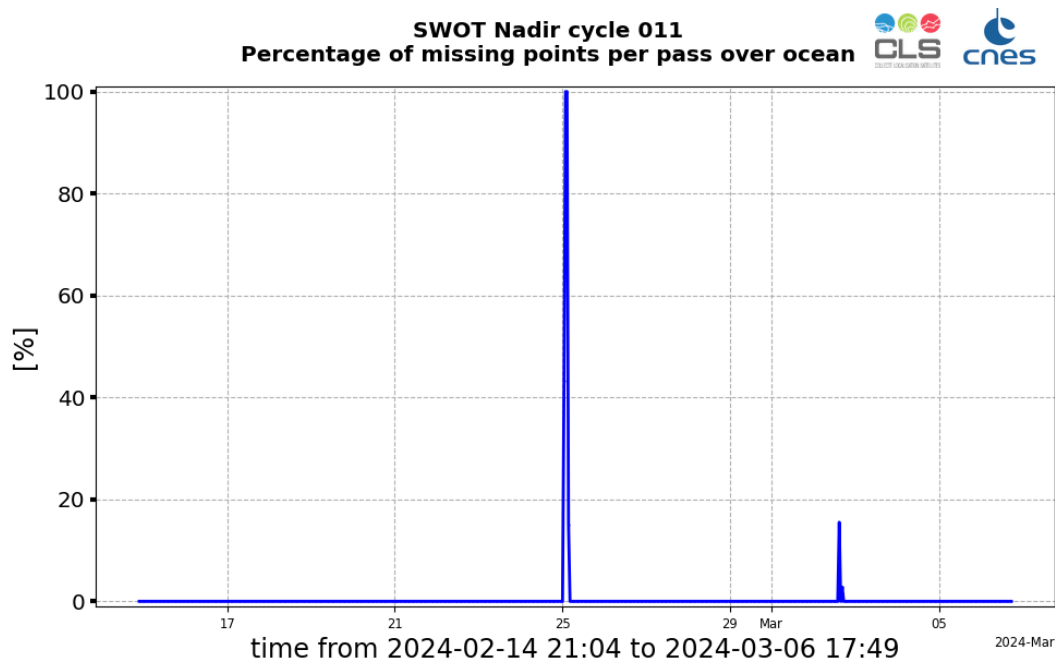


Figure 2: Monitoring of the percentage per pass of missing data over ocean, for SWOT Nadir GDR cycle 011

3.2. Edited measurements

The editing criteria are defined as minimum and maximum thresholds for various parameters. Measurements are edited if at least one parameter does not lie within the thresholds. These thresholds are expected to remain constant throughout SWOT Nadir mission, so that monitoring the number of edited measurements allows a survey of data quality.

The percentage of points removed by each criterion is given in the table 2. Note that these statistics are obtained with measurements over ocean only (using `surface_classification_flag`) and already edited by ice flag (using `ice_flag`).

The percentage of measurements with sea ice is of 12.67 % (2.35 % when limited to ocean at $|\text{latitude}| < 66^\circ$).

Parameters	Thresholds		Rejected	
	Minimum	Maximum	MLE4	Adaptive
sea surface height anomaly	-2 m	2 m	1.54 %	0.78 %
sea surface height	-130 m	100 m	0.37 %	0.08 %
square off nadir angle	-0.2 deg ²	0.64 deg ²	0.30 %	0.30 %
swh	0 m	11 m	0.32 %	0.05 %
range number	10	30	0.51 %	0.24 %
range std	0 m	0.2 m	1.08 %	0.69 %
sigma0	7 dB	30 dB	0.28 %	0.20 %
sigma0 number	10 dB	20 dB	0.50 %	0.22 %
sigma0 std	0 dB	1 dB	1.09 %	0.84 %
wind speed	0 m/s	30 m/s	0.53 %	0.47 %
sea state bias	-0.5 m	0 m	0.26 %	0.01 %
ionospheric correction	-0.4 m	0.04 m	0.69 %	0.59 %
radiometer wtc	-0.5 m	-0.001 m	0.14 %	0.14 %
dry tropospheric correction	-2.5 m	-1.9 m	0.00 %	0.00 %
dynamical atmospheric correction	-2 m	2 m	0.00 %	0.00 %
ocean tide height	-5 m	5 m	0.00 %	0.00 %
internal tide	-5 m	5 m	0.00 %	0.00 %
pole tide height	-15 m	15 m	0.00 %	0.00 %
solid earth tide height	-1 m	1 m	0.00 %	0.00 %
Global statistics of edited measurements by thresholds			2.22 %	1.57 %

Table 2: Table of parameters used for editing and the corresponding percentages of edited measurements for each parameter for SWOT Nadir MLE4 and Adaptive, over cycle 011

The measurements rejected during the editing process are shown on the maps below, for MLE4 and Adaptive data (Figure 3). Equatorial wet zones or zones with sea ice appear on the maps as regions with less valid data, as it is also the case for other altimeters: measurements are corrupted by rain or sea ice. They were therefore removed by editing.

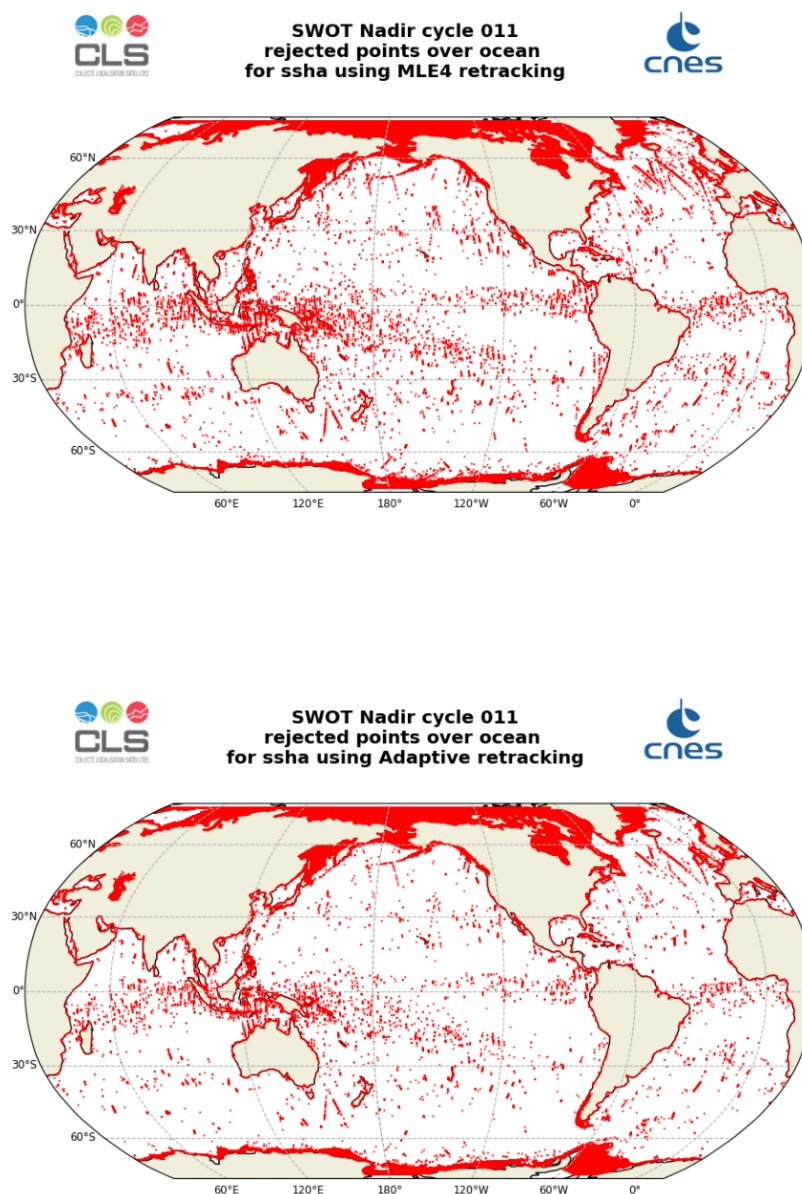


Figure 3: Edited measurements for SWOT Nadir over cycle 011

4 Geophysical parameter analysis

The monitoring of instrumental and geophysical parameters is crucial to detect potential drifts or jumps in long-term time series. These verifications are produced operationally to allow systematic monitoring of the main relevant parameters. When possible, comparisons with ERA5 model data and/or with Sentinel-6A-MF data are performed.

S6 standard changed to F09 on 02-03-2024.

4.1. Significant Wave Height

Ku-band wave estimations derived from altimeter measurements are monitored in this section. Wave height may reach several meters. Normalized histograms over cycle are plotted on the figure below for MLE4 and Adaptive. MLE4 SWH is centered around 2.68 m for MLE4 and 2.62 m for Adaptive. It shows the consistency between the two retrackings. Furthermore, values are coherent with ERA5 model and Sentinel-6A-MF estimations.

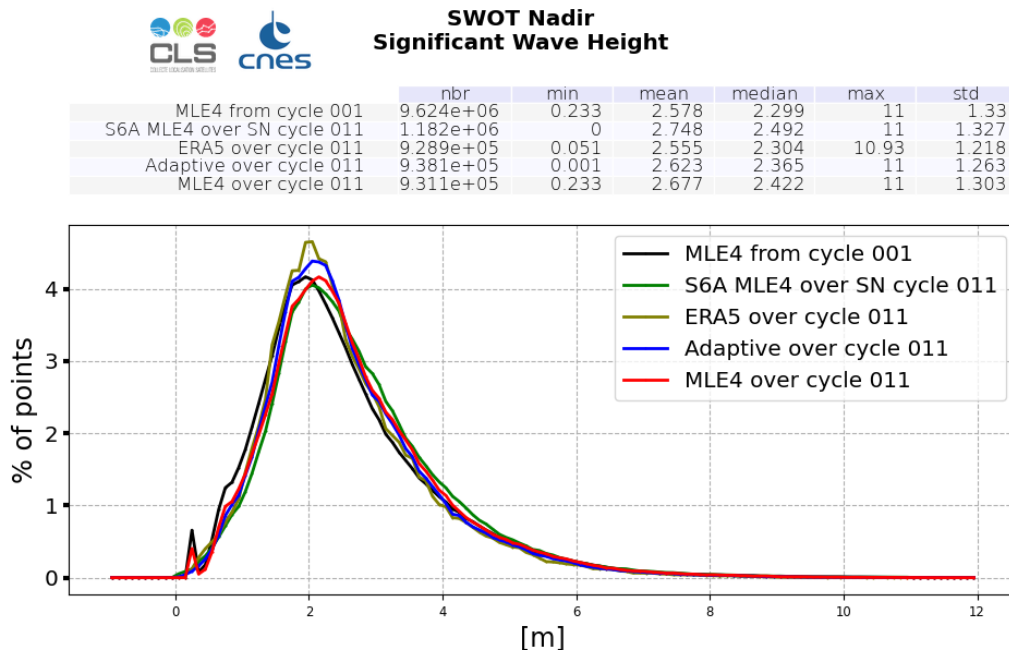


Figure 4: Ku-band Significant Wave Height histogram computed over cycle 011 (red line for SWOT Nadir MLE4 and blue line for SWOT Nadir Adaptive, green for Sentinel-6A-MF (LR MLE4) and dark green for ERA5) and from cycle 001 (SWOT Nadir, MLE4 only, black line)

Maps are plotted for MLE4 data separating ascending and descending passes (top Figure 5). Comparisons to ERA5 (middle) and Adaptive (bottom) are also shown on blue/red maps of Figure 5.

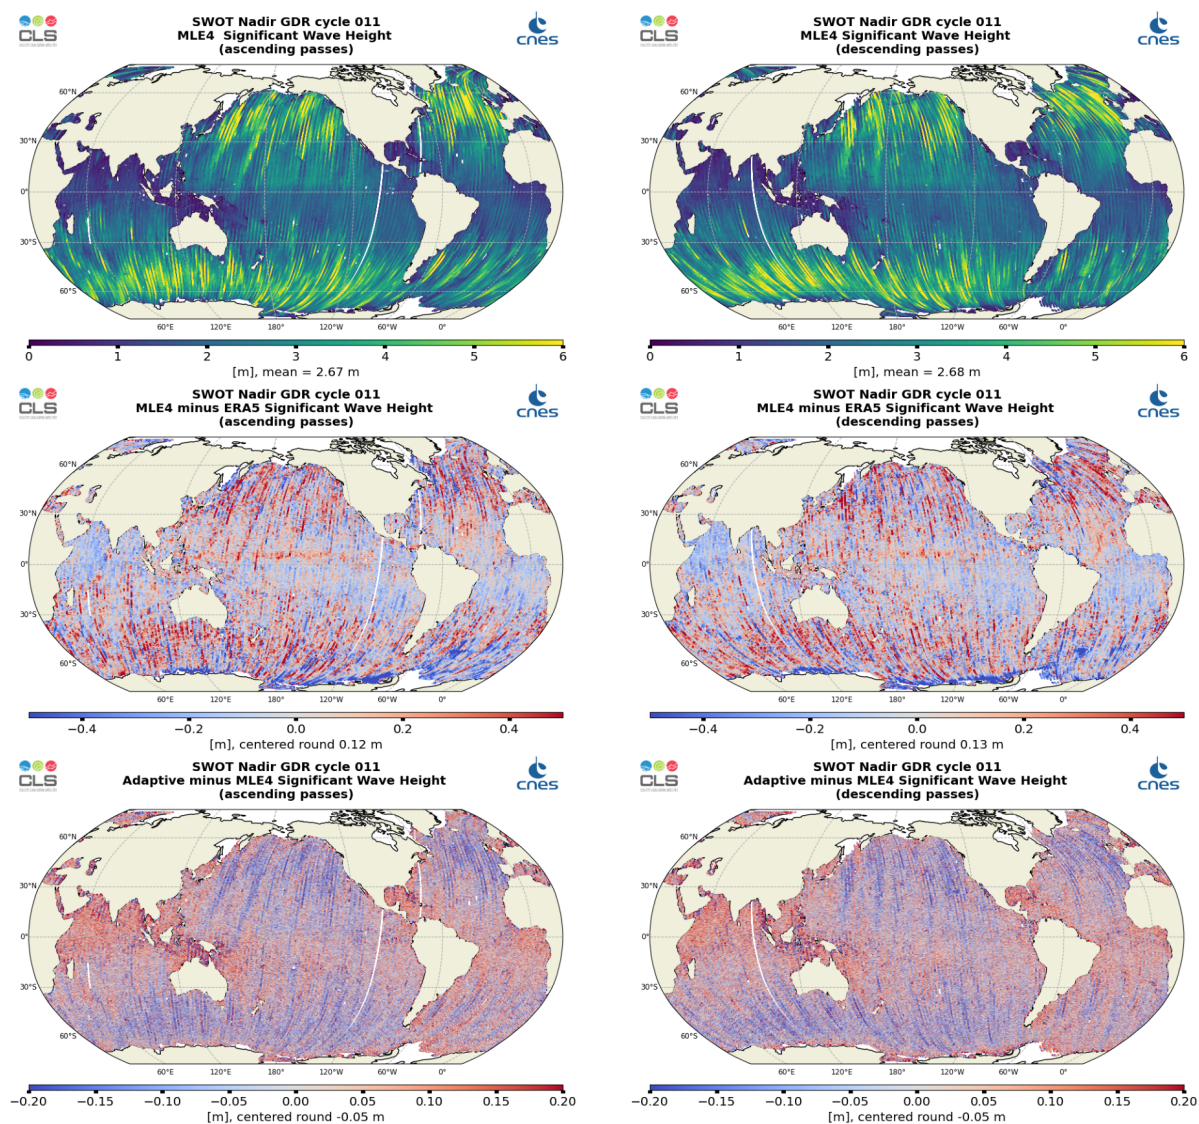


Figure 5: Along-track maps of Ku-band Significant Wave Height over cycle 011 for SWOT Nadir MLE4 (top), MLE4 minus model (middle) or Adaptive minus MLE4 (bottom), ascending passes (left) and descending passes (right)

The daily average of Ku-band SWH for SWOT Nadir is plotted on Figure 6 from cycle 001. It shows the similar features between SWOT Nadir and ERA5 waves, both for MLE4 and Adaptive, and with Sentinel-6A-MF (despite Sentinel-6A and SWOT are not looking at exactly the same ocean).

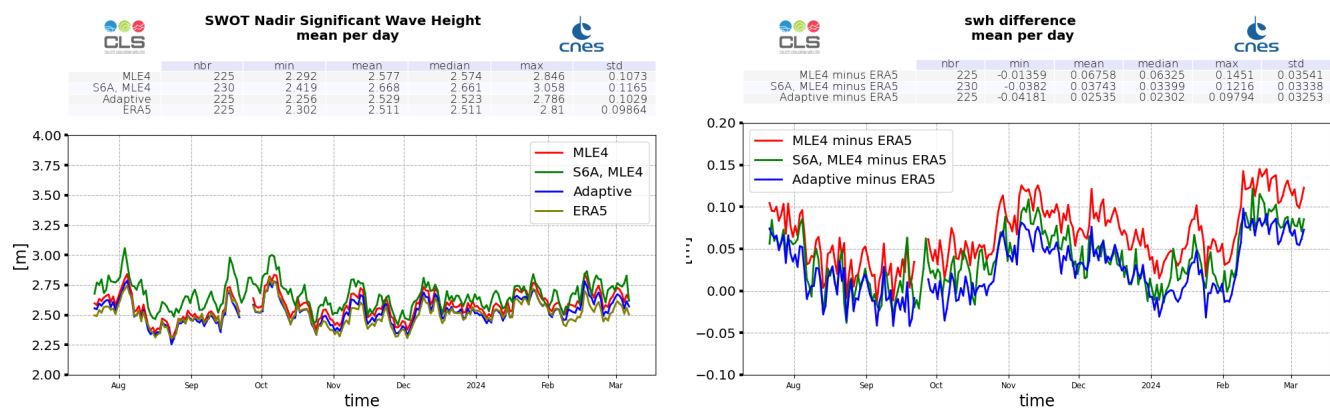


Figure 6: Ku-band Significant Wave Height daily monitoring from cycle 001 to 011, for SWOT Nadir, ERA5 model estimated at SWOT locations, and Sentinel-6A-MF (LR MLE4) (left), and difference with ERA5 model (right)

4.2. Backscattering coefficient

Ku-band backscattering coefficient is centered around 13.38 dB for MLE4 and around 13.23 dB for Adaptive (Figure 7). Ku-band backscattering coefficients present similar features between MLE4 and Adaptive, as shown on the maps (Figure 8), and on the daily monitoring (Figure 9).

Maps are plotted for MLE4 data separating ascending and descending passes (top Figure 8). Adaptive minus MLE4 difference (bottom) is also shown on blue/red map of Figure 8.

S6 change of standard implied a +0.91dB jump on 02-03-2024.

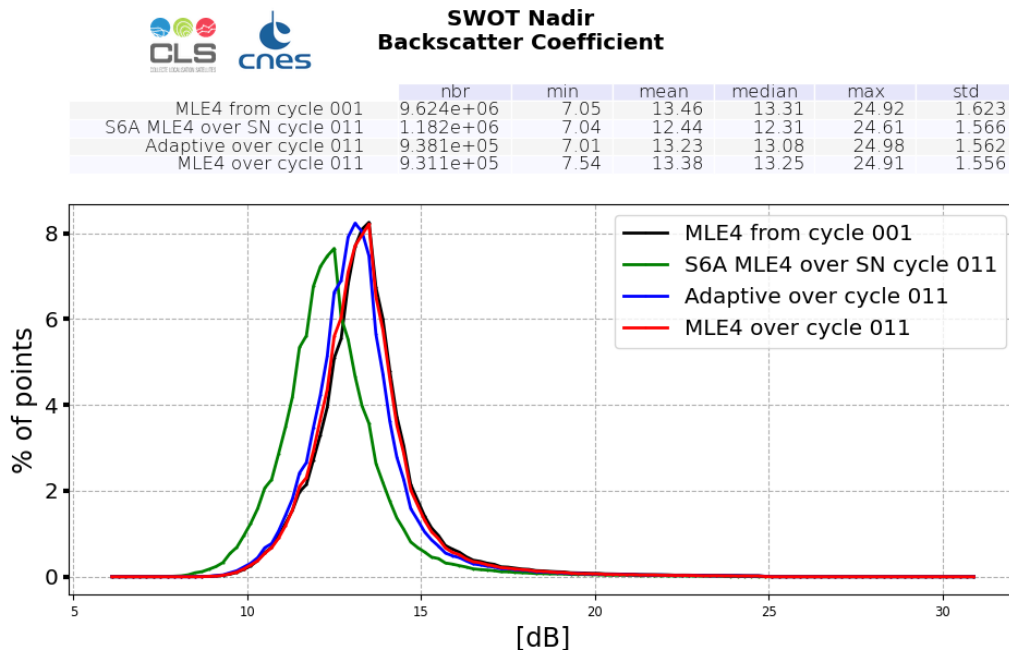


Figure 7: Ku-band Backscattering coefficient histogram computed over cycle 011 (red line for SWOT Nadir MLE4 and blue line for SWOT Nadir Adaptive, green for Sentinel-6A-MF (LR MLE4)) and from cycle 001 (SWOT Nadir, MLE4 only, black line)

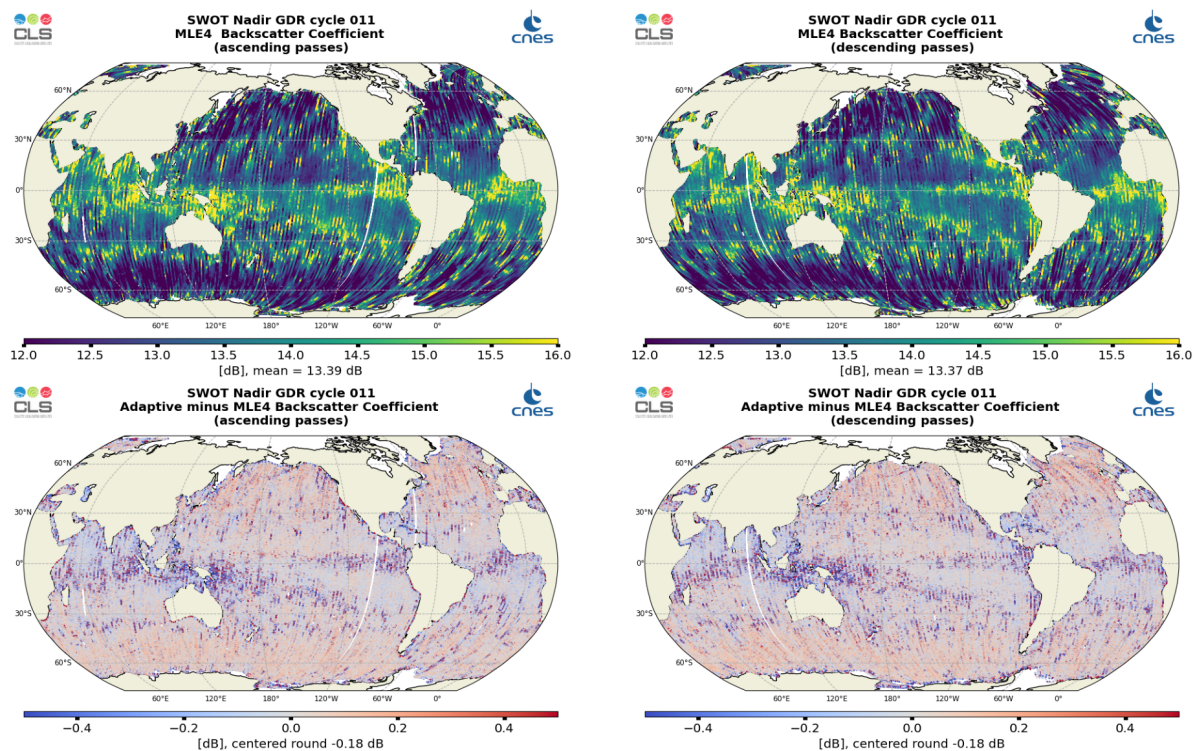


Figure 8: Along-track maps of Ku-band backscatter coefficient σ_0 over cycle 011 for SWOT Nadir MLE4 (top) or Adaptive minus MLE4 difference (bottom), ascending passes (left) and descending passes (right)

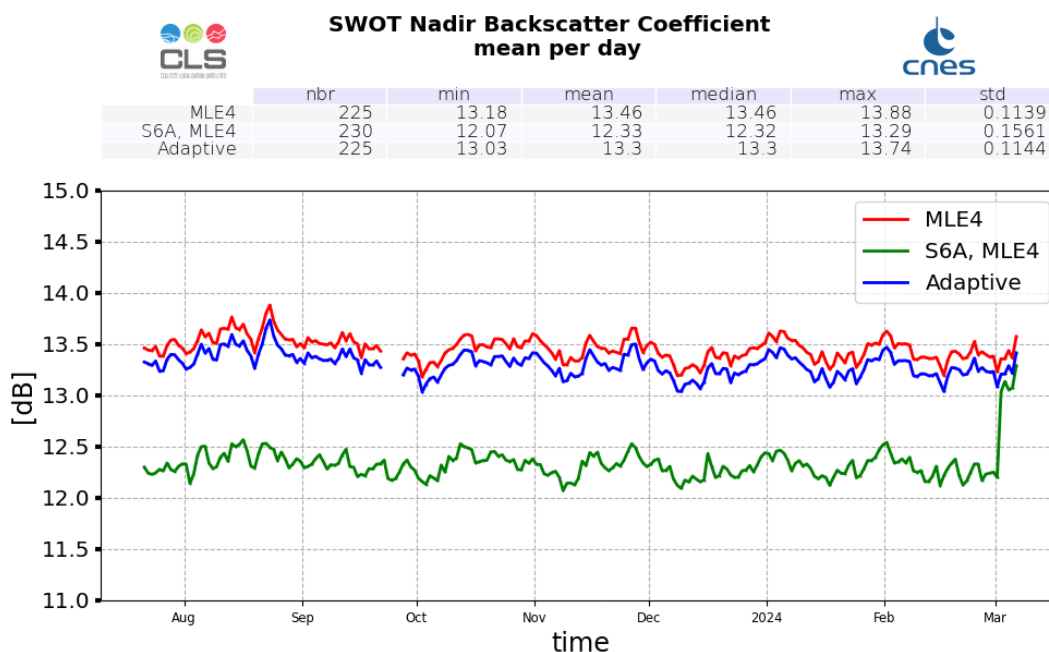


Figure 9: Ku-band Backscattering coefficient daily monitoring from cycle 001 to 011, for SWOT Nadir and Sentinel-6A-MF

4.3. Altimeter Wind Speed

Altimeter wind speed is derived from backscattering coefficient and significant wave height using Collard algorithm. To allow wind speed computation, a calibration bias is applied on the backscattering coefficient. For the current version of GDR, wind speed are not fitted to SWOT Nadir data, but the same biases as for Jason-3 GDR-F are applied. As a consequence, wind speed estimations are not completely aligned with ERA5 model (see histograms and maps below)

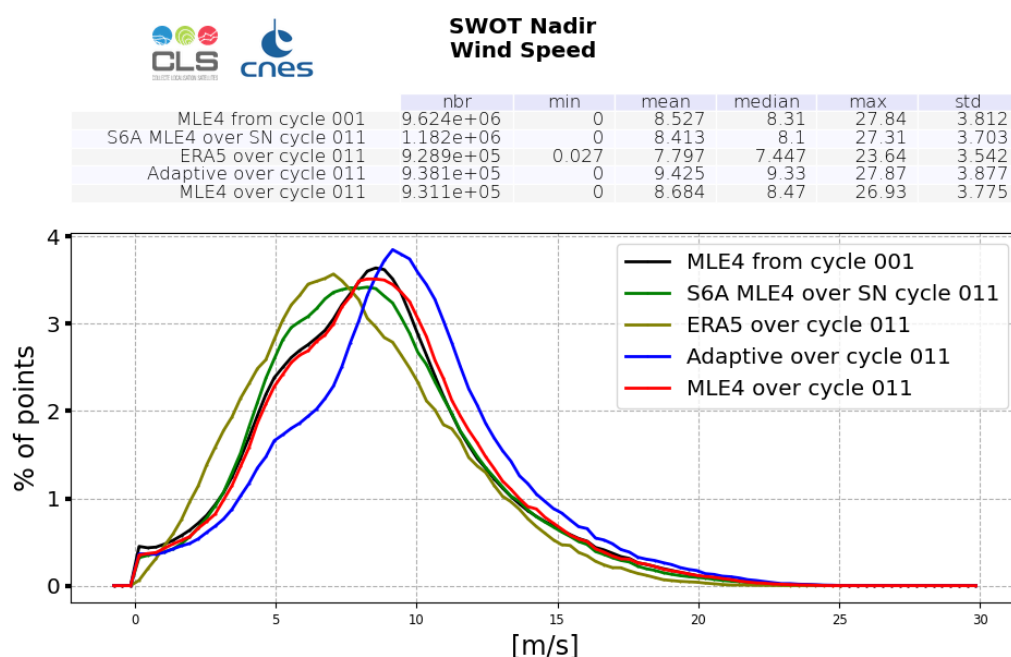


Figure 10: Altimeter Wind Speed histogram computed over cycle 011 (red line for SWOT Nadir MLE4 and blue line for SWOT Nadir Adaptive, green for Sentinel-6A-MF (LR MLE4)) and from cycle 001 (SWOT Nadir, MLE4 only, black line)

Maps are plotted for MLE4 data separating ascending and descending passes (top Figure 11). Comparisons to ERA5 (middle) and Adaptive (bottom) are also shown on blue/red maps of figure 11.

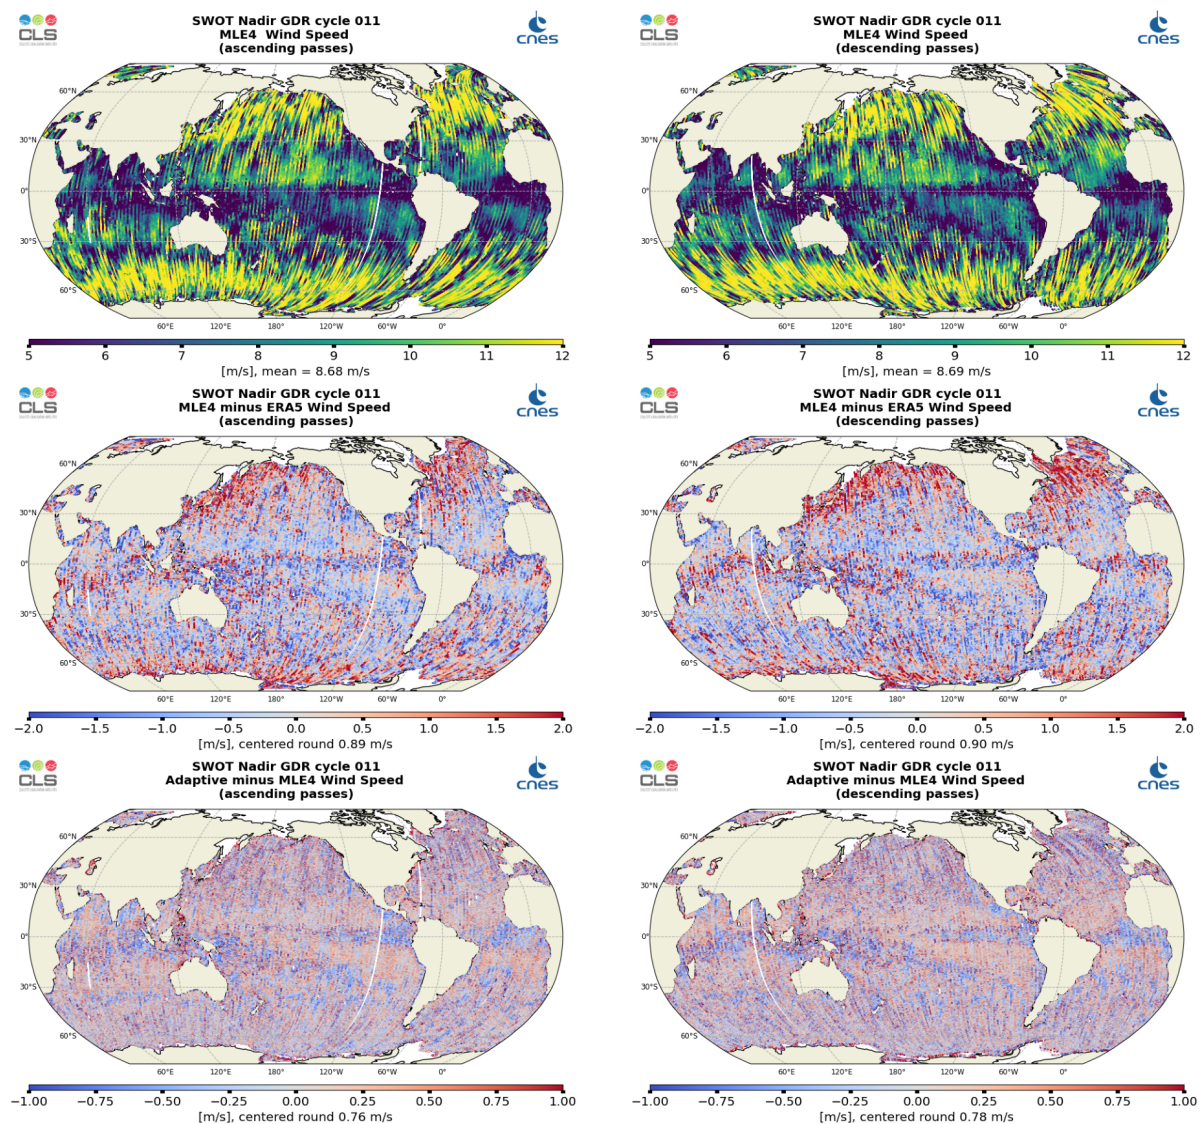


Figure 11: Along-track maps of Altimeter Wind Speed over cycle 011 for SWOT Nadir MLE4 (top), MLE4 minus ERA5 (middle) or Adaptive minus MLE4 (bottom), ascending passes (left) and descending passes (right)

The daily average from cycle 001 shows the wind speed values centered around 8.53 m/s for MLE4 and 9.27 m/s for Adaptive.

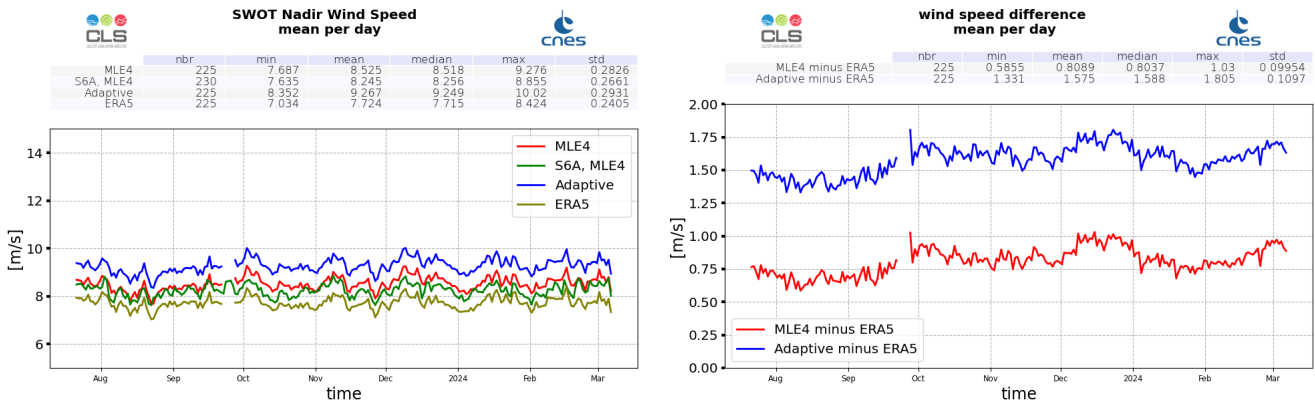


Figure 12: Wind Speed daily monitoring from cycle 001 to 011 for SWOT Nadir GDR, ERA5 model, and Sentinel-6A-MF (LR MLE4) (left), and daily mean difference with ERA5 (right)

4.4. Ionospheric correction

Over this cycle, altimeter filtered ionospheric correction is centered around -6.02 cm for MLE4 retrievals and around -5.64 cm for Adaptive retrievals. A bias of 0.69 cm for MLE4 and 1.08 cm for Adaptive is observed between SWOT Nadir altimeter and GIM model ionospheric corrections. This bias is monitored over science phase on right part of Figure 15. Comparisons to GIM model ionospheric correction between march 5 and 8, highlight a higher variability than nominal, probably caused by the format change of GIM inputs.

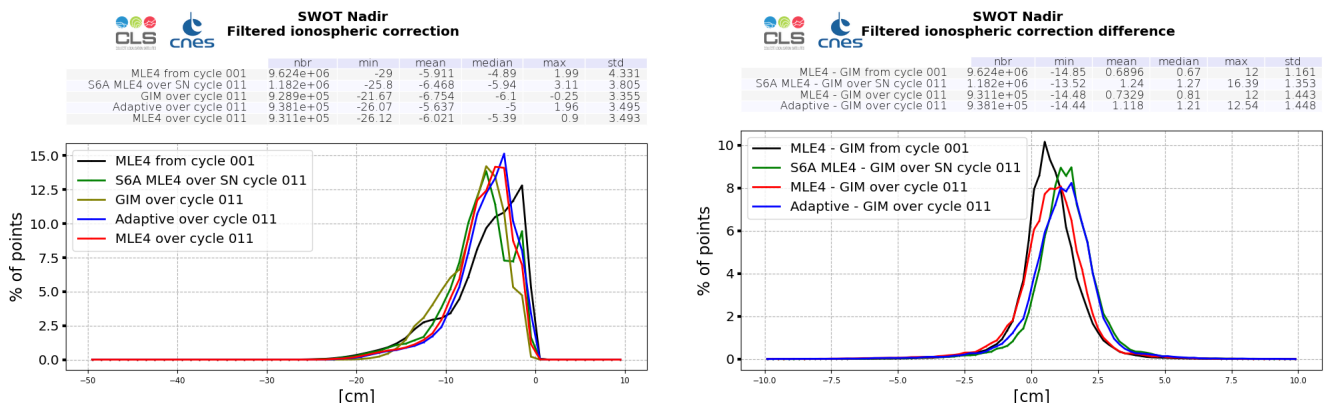


Figure 13: GIM model (dark green) and altimeter filtered ionosphere correction histogram computed over cycle 011 (red line for SWOT Nadir MLE4 and blue line for SWOT Nadir Adaptive, green for Sentinel-6A-MF (LR MLE4)) and from cycle 001 (SWOT Nadir, MLE4 only, black line) (left). Difference between filtered altimeter and GIM model (right).

Maps are plotted for MLE4 data separating ascending and descending passes (top Figure 14). Comparisons to GIM (middle top) and Adaptive (middle bottom) are also shown on blue/red maps of Figure 14. As this correction is strongly linked both to solar activity and day/night time measurements, corresponding local hours are plotted on bottom maps of Figure 14.

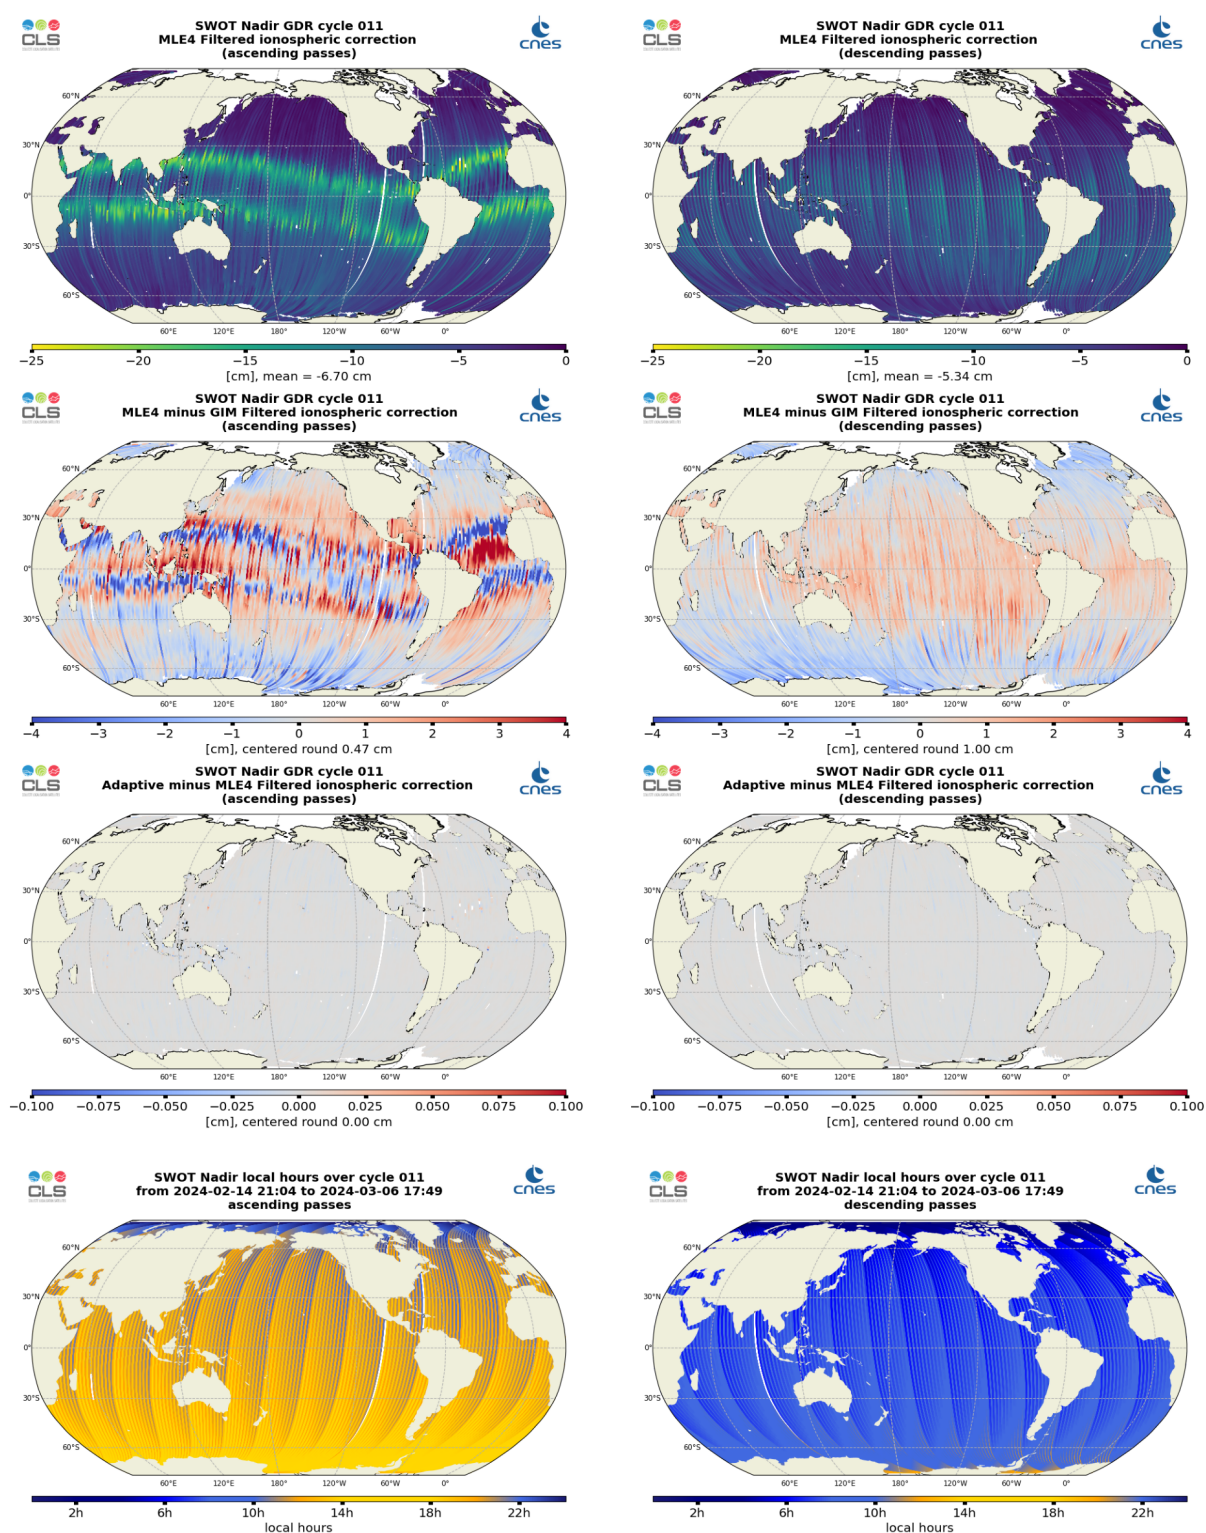


Figure 14: Along-track maps of filtered ionosphere correction over cycle 011 for SWOT Nadir MLE4 (top), MLE4 minus GIM (middle top) or Adaptive minus MLE4 (middle bottom), and local hours (bottom), for ascending passes (left) and descending passes (right)

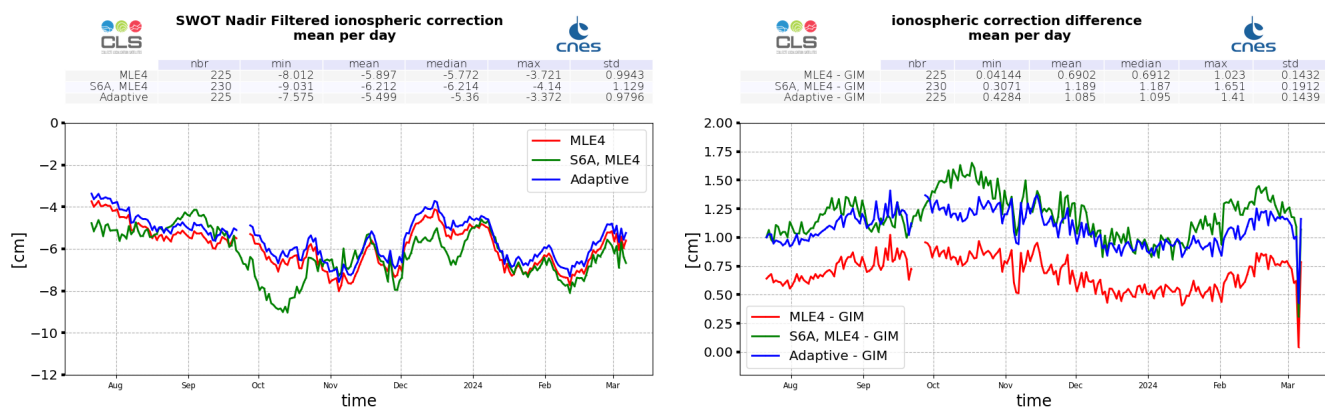


Figure 15: SWOT Nadir MLE4 (red), Adaptive (blue) and Sentinel-6A-MF (LR MLE4) (green) filtered ionosphere correction daily monitoring from cycle 001 to 011 (left) and difference with GIM model (right)

4.5. Mispointing

Note that as there is no square off nadir angle values on Adaptive retraking algorithm, only MLE4 values are shown here. Over this cycle, SWOT Nadir mispointing deduced from waveforms through MLE4 retraking is centered around 0.008 deg^2 . This slight mispointing values are stable in time (Figure 18) and coherent for this cycle with the overall science phase as seen on the histogram (Figure 16).

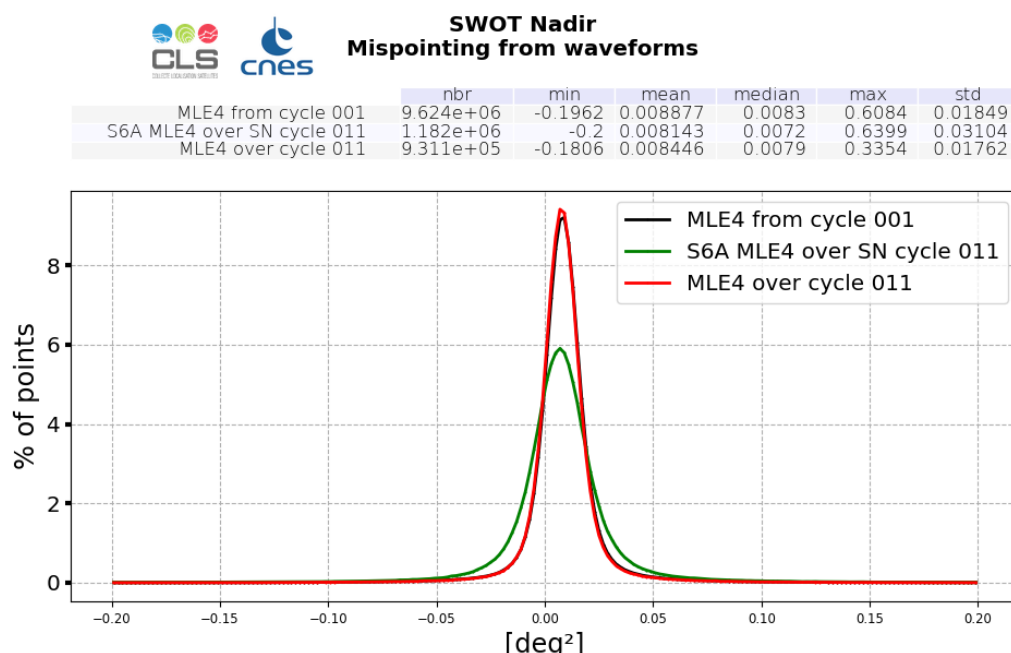


Figure 16: Mispointing histogram computed over cycle 011 (solid line) and from cycle 4 (dashed line)

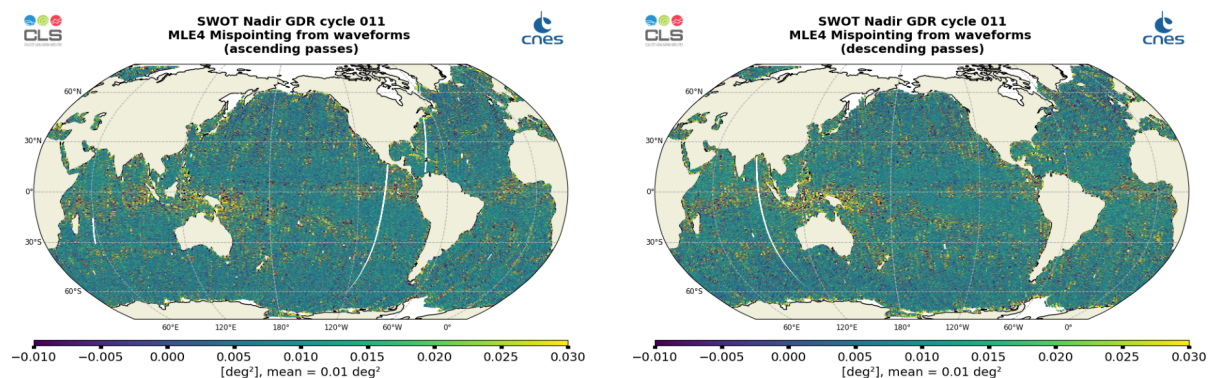


Figure 17: Along-track maps of mispointing over cycle 011 for SWOT Nadir MLE4, ascending passes (left) and descending passes (right)

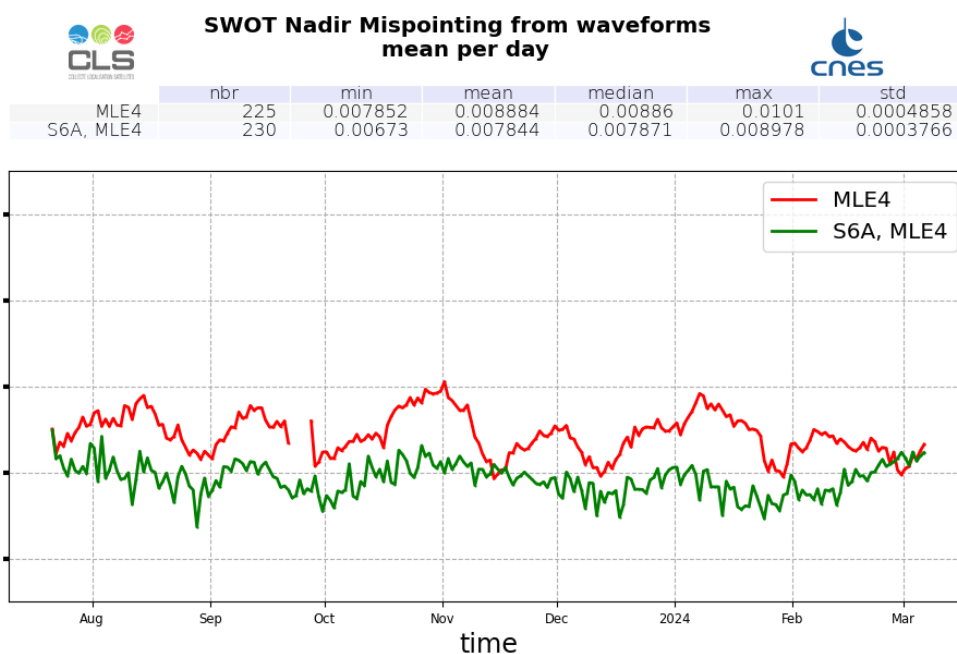


Figure 18: Mispointing daily monitoring from SWOT cycle 001 to 011 for SWOT Nadir GDR (red) and Sentinel-6A-MF (green)

4.6. Radiometer parameters

Comparison between radiometer and ECMWF wet troposphere correction highlights the good agreement between the two solutions. This difference is monitored using daily average in order to detect any jumps or anomaly (Figure 21), this indicator is stable around 0.32 cm, with a standard deviation value of 0.96 cm.

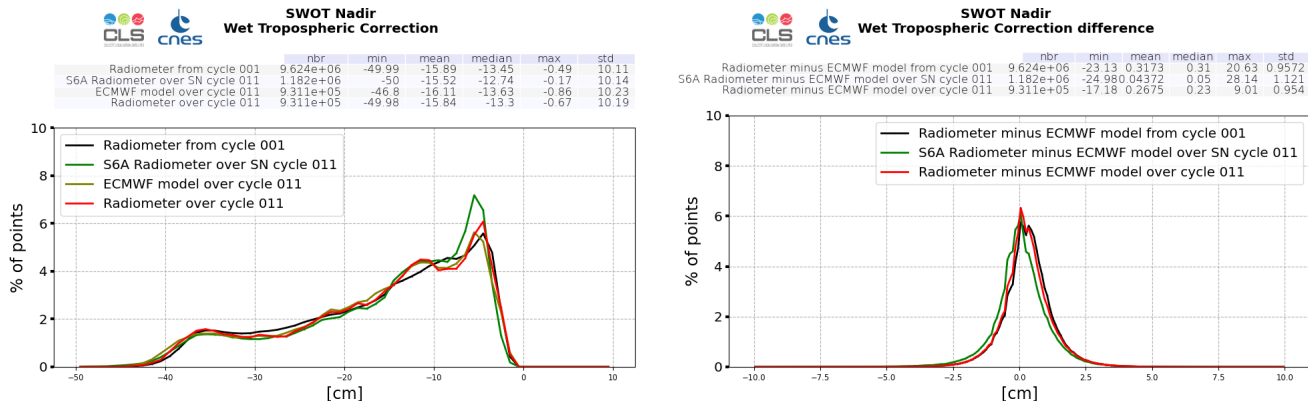


Figure 19: Histogram of wet troposphere corrections : SWOT Nadir radiometer (left) and difference with ECMWF model (right), computed over cycle 011 and from cycle 001 (black line)

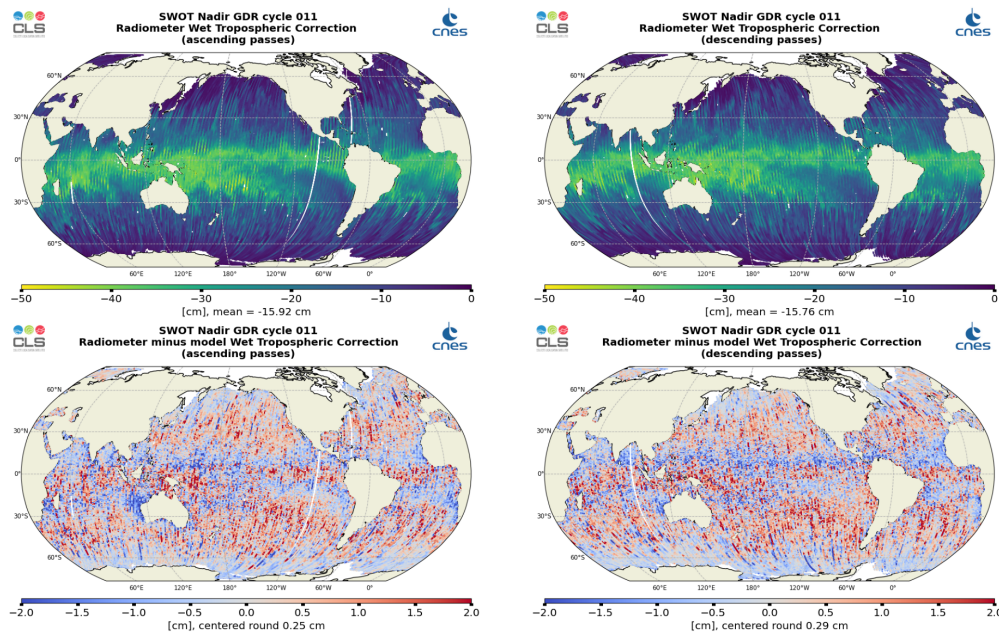


Figure 20: Along-track maps of the interpolated to Nadir AMRs wet tropospheric corrections (top) and radiometer minus ECMWF model difference of wet tropospheric corrections (bottom), computed over cycle 011

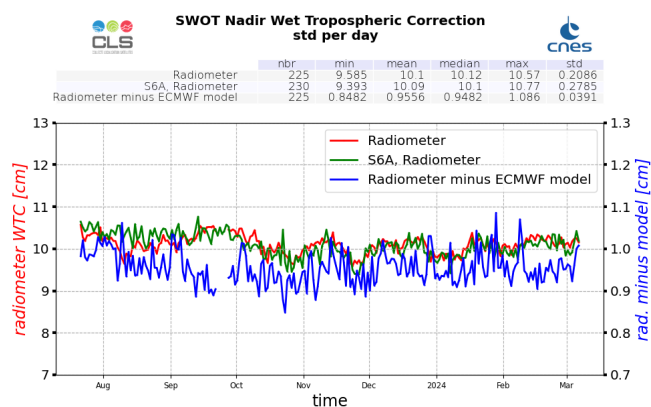
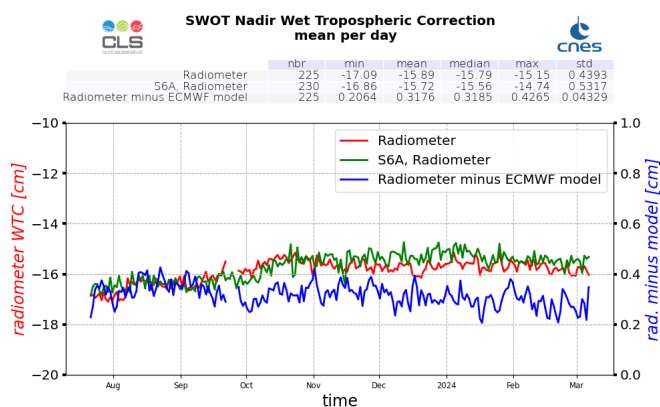


Figure 21: Daily monitoring of mean (left) and standard deviation (right) of the interpolated to Nadir AMRs wet tropospheric corrections (red) and radiometer minus ECMWF model difference of wet tropospheric corrections (blue), computed from cycle 001 to 011. Sentinel-6A-MF radiometer monitoring in green.

5 Sea Surface Height Anomaly

Over this cycle, SSHA is centered around 5.97 cm in MLE4, 3.03 cm in Adaptive.

Maps presented on Figure 23 show homogeneous patterns for MLE4 and Adaptive retrackings.

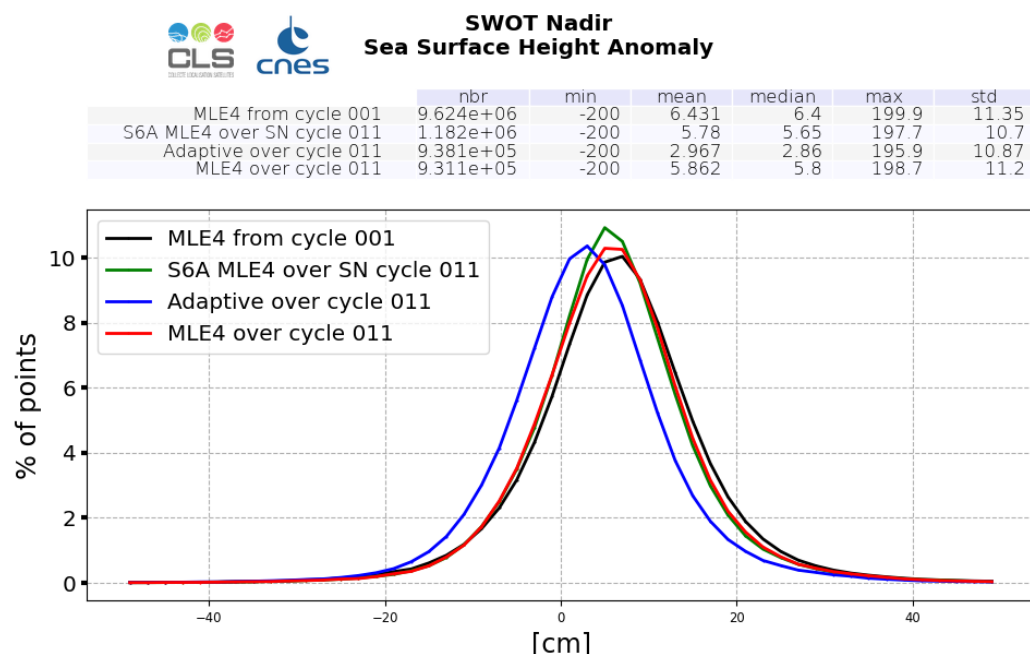


Figure 22: SSHA histogram computed over cycle 011 (red line for SWOT Nadir MLE4 and blue line for SWOT Nadir Adaptive, green for Sentinel-6A-MF (LR MLE4)) and from cycle 001 (SWOT Nadir, MLE4 only, black line)

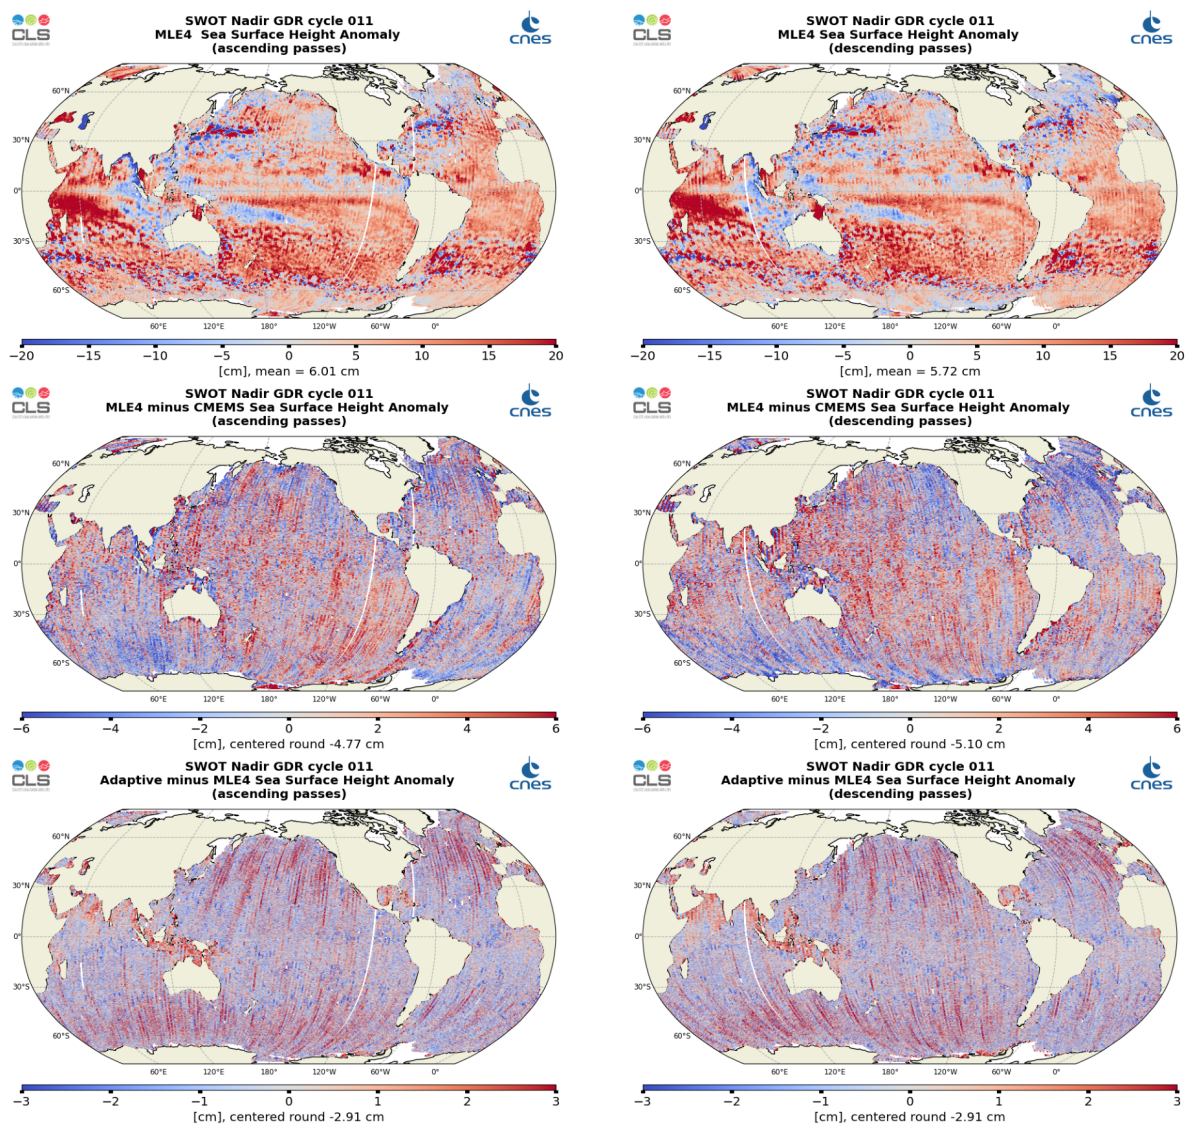


Figure 23: Along-track maps of SSHA over cycle 011 for SWOT Nadir MLE4 (top), MLE4 minus CMEMS (middle) or Adaptive minus MLE4 (bottom), ascending passes (left) and descending passes (right)

Long term time monitoring allow to detect any jump or drift. In the plot below, the daily mean of SSHA, using a selection on open ocean (surface_classification_flag = 0) and valid data [part 3.2.] follow the same variations for SWOT Nadir MLE4 and Adaptive. Along track ssha standard deviation is stable around 10.66 cm.

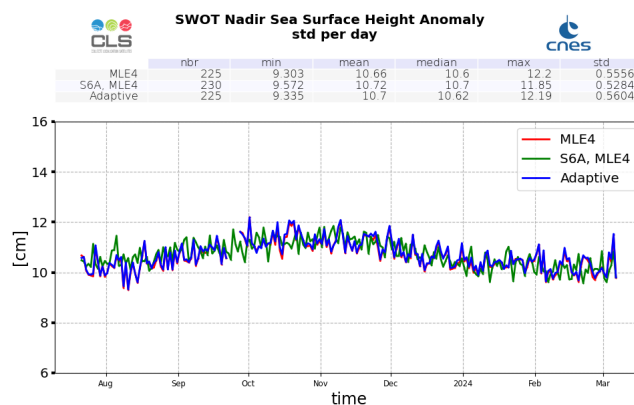
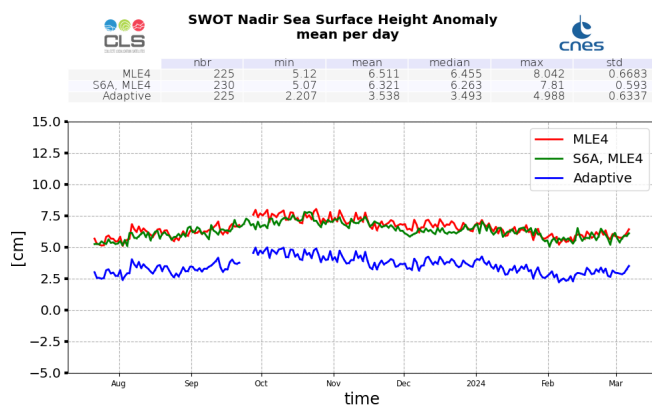


Figure 24: SSHA daily monitoring from cycle 001 to 011, for SWOT Nadir GDR

6 Crossover Analysis

6.1. Mono mission crossover

Sea Surface Height crossover differences are the SSH differences between ascending and descending passes where they cross each other. Crossover differences are systematically analysed to estimate data quality and the Sea Surface Height (SSH) performances. SSH crossover differences are computed from the valid data, with a maximum time lag of 10 days, in order to limit the effects of ocean variability which are a source of error in the performance estimation. The mean SSH crossover differences should ideally be close to zero and standard deviation should ideally be small.

Nevertheless, SLA varies also within 10 days, especially in high variability areas. Furthermore, due to lower data availability (due to seasonal sea ice coverage), models of several geophysical corrections are less precise in high latitude. Therefore, an additional geographical selection - removing shallow waters, areas of high ocean variability and high latitudes ($> |50|$ deg) - is applied for cyclic monitoring.

After data editing, applying additional geographical selection and SWOT Nadir standards, the crossover standard deviation is about 4.81 cm in MLE4, 5.03 cm in Adaptive.

The maps of the mean differences at crossovers (4 by 4 degrees by bins) are plotted for the current cycle (top) and from cycle 001 onwards (bottom), for MLE4 (left) and Adaptive (right) on Figure 25.

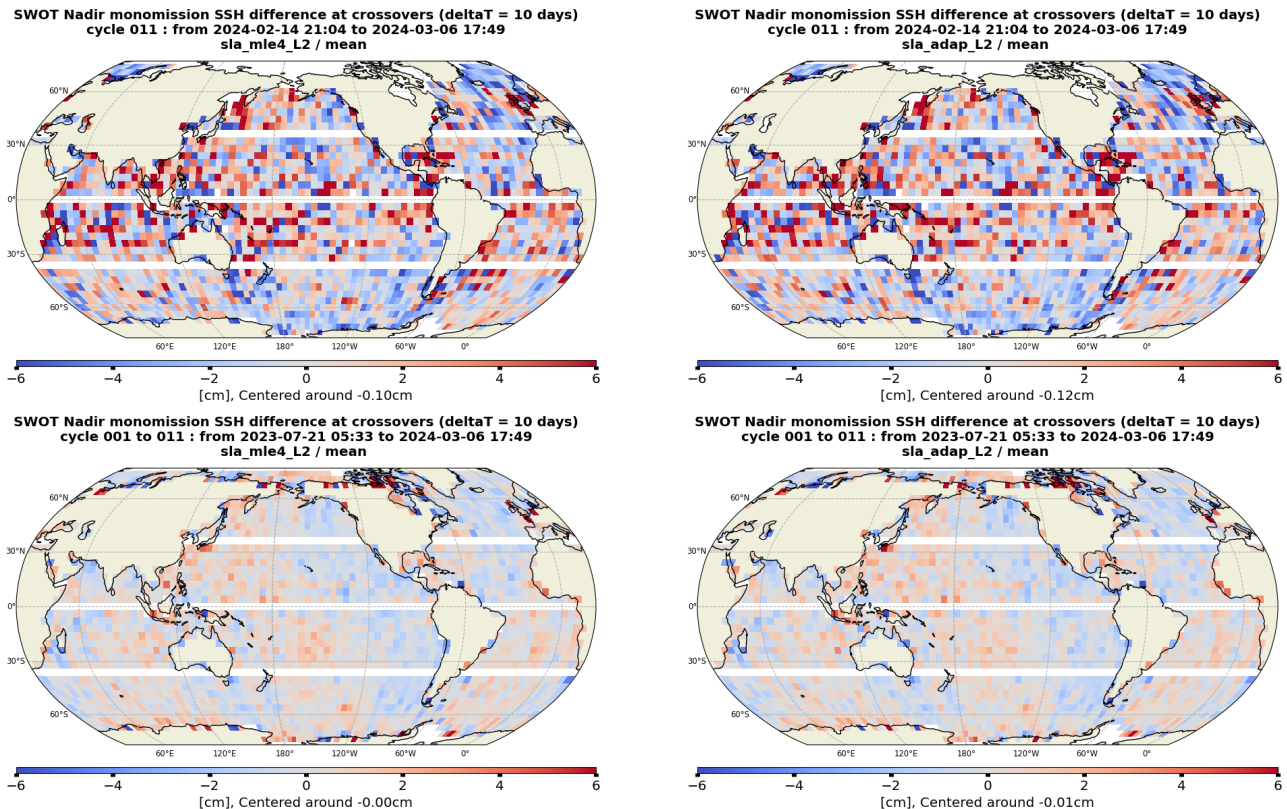


Figure 25: Mean SSH difference at crossovers for SWOT Nadir MLE4 (left) and Adaptive (right) cycle 011(top) and from cycle 001 to cycle 011 (bottom)

The mean and standard deviation of SSH differences at crossovers are plotted as a function of time on a daily basis on Figure 26. The statistics are computed after data editing and using the geographical selection criteria ($|\text{latitude}| < 50^\circ$; bathymetry $< -1000\text{m}$, ocean variability (computed over several years) $< 0.2\text{m}$). Please note that temporal serie is done until 10 days before the end of the cycle in order to take into account the drifting period of 10 days that allows to compute significant indicators. The results are in line between MLE4, and Adaptive data, with the same temporal evolution.


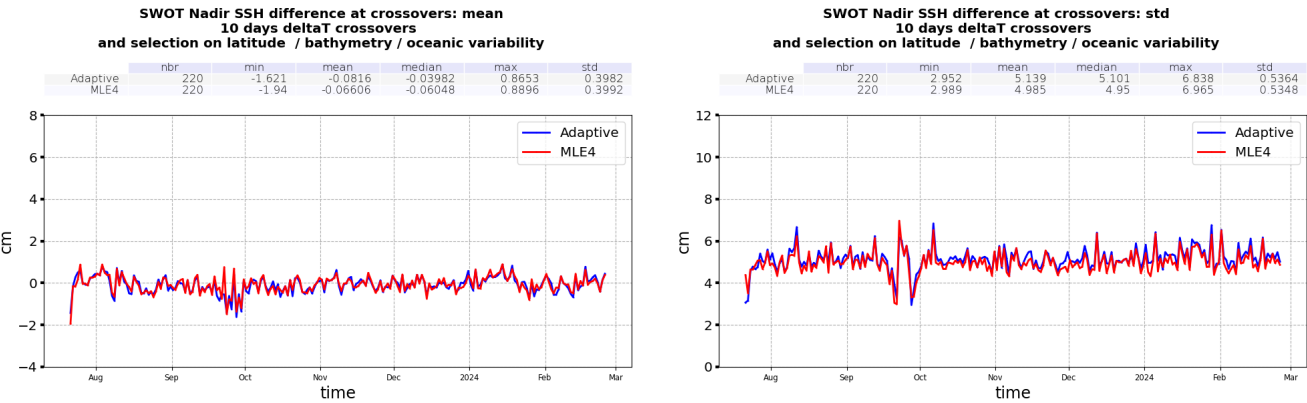


Figure 26: Monitoring of SSH difference at crossovers for SWOT Nadir MLE4 (red) and Adaptive (blue) : mean (left) and standard deviation (right), from cycle 001 to 011

6.2. Multi-mission crossover

The map of the mean SSH differences at Sentinel-6 MF LR crossovers (4 by 4 degree bin) is plotted on figure 27 and figure 28 . This map does not show strong anomalies and highlights the consistency between the two missions.

SSH differences at crossovers (DeltaT = 10days) SWOT Nadir wrt S6A_LR
cycle 011 : from 2024-02-14 21:04 to 2024-03-06 17:49

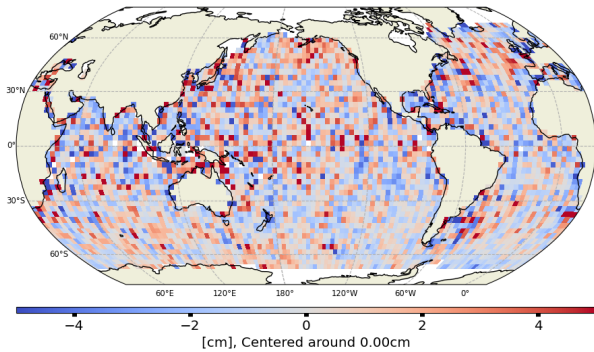

SSH differences at crossovers (DeltaT = 10days) SWOT Nadir wrt S6A_LR
cycle 001 to 011 : from 2023-07-21 05:33 to 2024-03-06 17:49


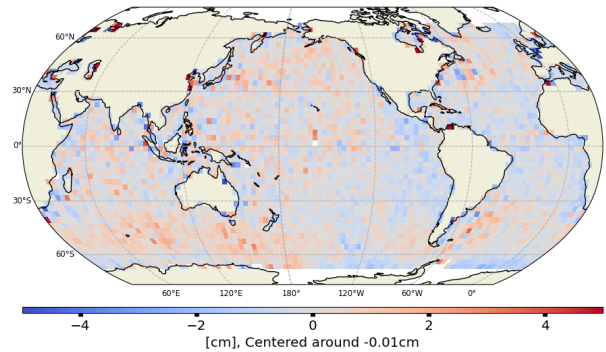


Figure 27: Mean SSH difference at crossovers between SWOT Nadir MLE4 and Sentinel-6 MF LR MLE4 over cycle 011 (left) and from cycle 001 onwards (right)

SN sla_mle4 L2 vs S6A LR 10days crossover : stat = mean
Cycle 001 to 011 = from 2023-07-21 05:33 to 2024-03-06 17:49

nbr: 230 min: -0.5898 mean: 0.06483 median: 0.06088 max: 0.8678 std: 0.2348

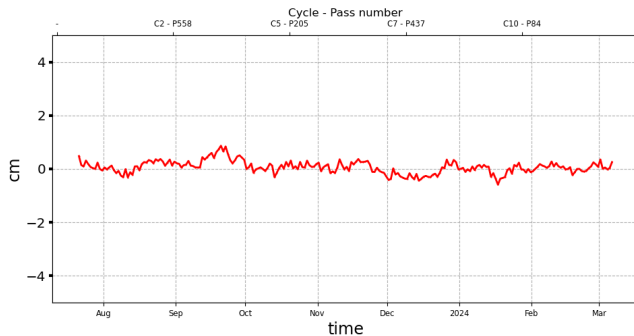

SN sla_mle4 L2 vs S6A LR 10days crossover : stat = std
Cycle 001 to 011 = from 2023-07-21 05:33 to 2024-03-06 17:49

nbr: 230 min: 3.442 mean: 6.138 median: 6.12 max: 8.337 std: 0.6055

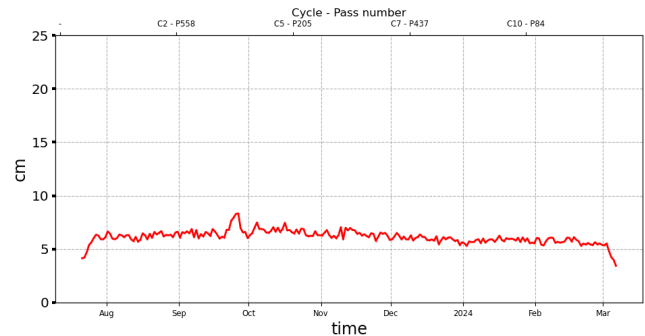


Figure 28: Daily monitoring of SSH difference at crossovers between SWOT Nadir MLE4 and Sentinel-6 MF LR MLE4 from cycle 001 onwards : mean (left) and standard deviation (right)

7 Conclusion

These results highlight the good quality of SWOT Nadir GDR products over ocean. The performances observed at crossovers over this cycle, and the sea level and other parameters derived from the altimeter show good metrics and good consistency with the Sentinel-6A-MF reference mission.

References

- [1] Description of the mission on AVISO website (<https://www.aviso.altimetry.fr/en/missions/current-missions/swot.html>).
- [2] SWOT Level-2 Nadir Altimeter products User Guide. SALP-ST-M-EA-17043-CN, edition 1.4, Oct 2022 (https://www.aviso.altimetry.fr/fileadmin/documents/data/tools/SALP-ST-M-EA-17043-CN_0104.pdf)
- [3] Jason-3 GDR-F user handbook (https://www.aviso.altimetry.fr/fileadmin/documents/data/tools/hdbk_j3.pdf).